

## COMMERCIAL PARTS LIST


| ITEM | QTY | PART NUMBER | DESCRIPTION |
|---|---|---|---|
| C1 | 7 | NAS620C2 | #2 FLAT WASHER<br>REDUCED OUTER DIAMETER |
| C2 | 7 | NASI352N02-4 | #2-56(.086) UNRC-3A X .250<br>SOCKET HEAD CAP SCREW |
| C3 | A/R | PLTIM-M702 | CABLE TIE, HALAR FLUOROPOLYMER, PANDUIT CORP. |
| C4 | A/R | SN63PB37/RMA | SOLDER, TIN/LEAD, RMA FLUX |
| C5 | 2 | NAS620C6 | #6 FLAT WASHER<br>REDUCED OUTER DIAMETER |
| C6 | A/R | 3145 CLEAR | RTV ADHESIVE/SEALANT, CLEAR, DOW CORNING |
| C7 | 1 | SDG32104805-009 | DECAL, ELECTROSTATIC SYMBOL<br>.5 IN X .5 IN, METAL PHOTO AND ADHESIVE (JSC) |
| C8 | 1 | 4272-15S | CONNECTOR COVER, D-TYPE (SCS) |


## DRAWING LIST

| ITEM | QTY | DRAWING NUMBER | DESCRIPTION |
|---|---|---|---|
| 1 | 1 | SI101EFA1524 | RADIOMETER BOARD ASSEMBLY |
| 2 | 1 | SI101EFA1525 | RADIOMETER HARNESS ASSEMBLY |
| 3 | 2 | SI101MFP2338 | MODIFIED FILTER COVER FASTENER |
| 4 | 1 | SI101MFA1521 | RADIOMETER HOUSING ASSEMBLY |
| 5 | 1 | SI101MFD1523 | RADIOMETER COVER |
| 6 | 1 | SI101MFT1520-XX | COMBO LABEL |
| 7 | 1 | SI101MFT1520-03 | NAME LABEL |
| 8 | 1 | SI101MFT1520-04 | CONNECTOR LABEL |

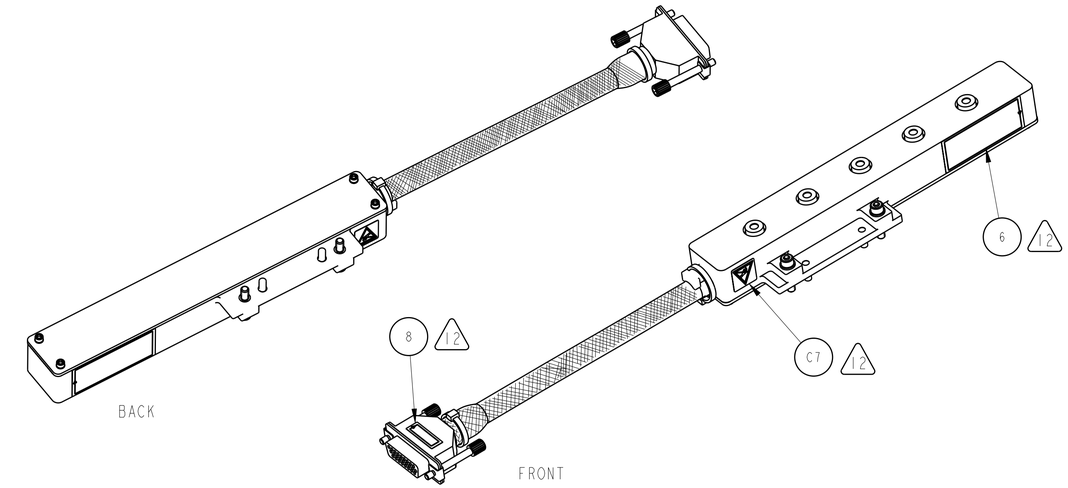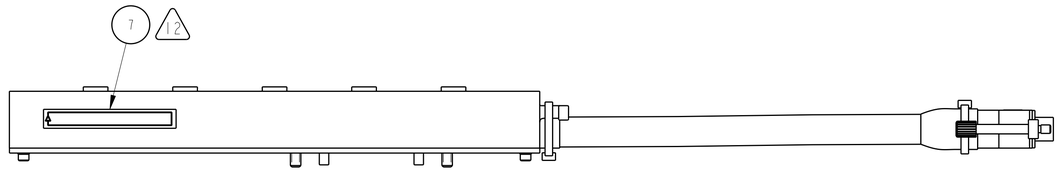


NOTES:

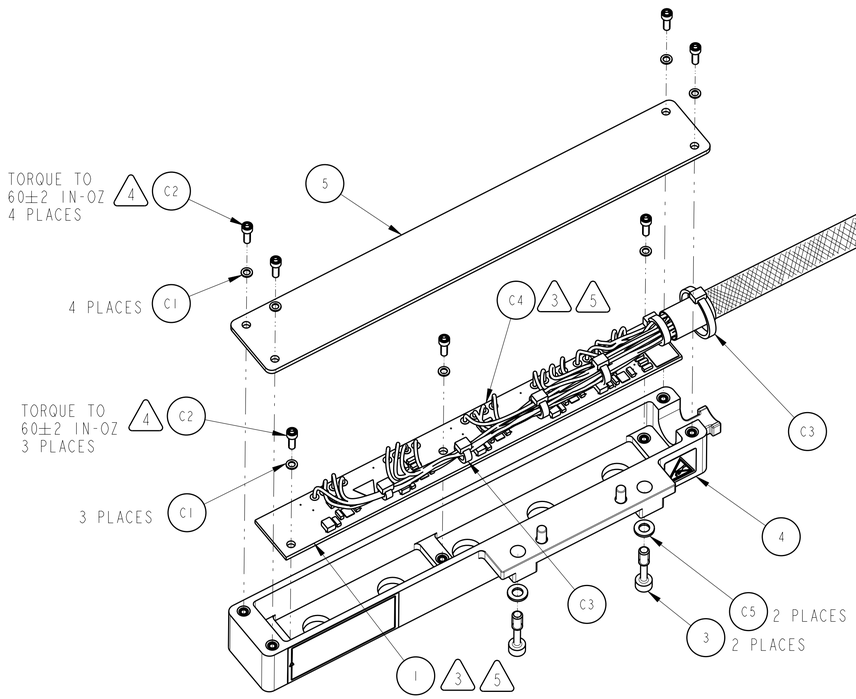1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. ASSEMBLY AND SOLDERING SHALL BE IN ACCORDANCE WITH NASA-STD-8739.3.
4. TORQUE VALUES SHOWN ARE EFFECTIVE TORQUES ONLY. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE VALUES TO DETERMINE THE TOTAL TORQUE.
5. REFERENCE CONNECTION DIAGRAM ON HARNESS ASSEMBLY DRAWING SI101EFA1525.
6. CHROMATE CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE 1, CLASS 3.
7. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
8. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
9. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW PER SAE-AS478, METHOD 35D.
10. STAKE WIRE FOR STRAIN RELIEF AND COVER ALL SOLDER CONNECTIONS WITH RTV(ITEM C6). STAKING, BONDING AND INSPECTION SHALL BE IN ACCORDANCE WIITH NASA-STD-8739.1.
11. TEST ASSEMBLY PER ACME-TST-022.
12. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.
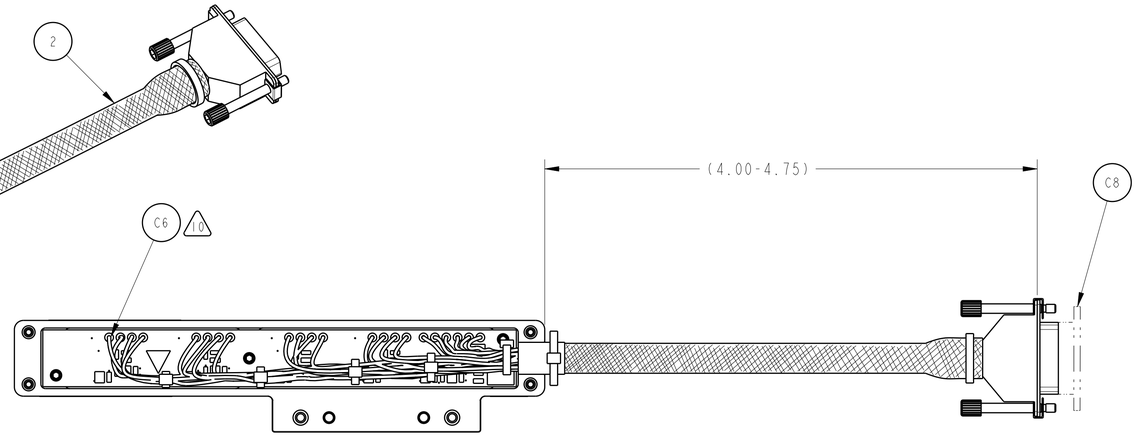
| CHG | ZONE | DESCRIPTION | APP/DATE |
|---|---|---|---|
| D | | INCORPORATED ACME-ECO-594 AND ACME-ECO-612 | JO 7/27/16<br>AD 7/27/16<br>AR 7/28/16 |
| C | | INCORPORATED ACME-ECO-464 | JO 5/19/15<br>TG 5/19/15<br>GF 5/19/15 |
| B | | INCORPORATED ACME-ECO-414 | KR 2/5/15<br>GF 2/6/15<br>AD 2/6/15 |
| A | | INCORPORATED ACME-ECO-223 | KR 1/3/14<br>MA 1/6/14<br>AD 1/7/14 |

REVISIONS

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E. McCLOSKEY DATE: 05/27/16

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCE ON

| | |
|---|---|
| .X | ± 0.03 |
| .XX | ± 0.01 |
| .XXX | ± 0.005 |
| FRACTION | ± - |
| ANGULAR | ± 0.50° |
| BREAK EDGES | N/A |

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE


ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200


| | |
|---|---|
| PROJECT LEAD | B.BOROWSKI 7/13/12 |
| QUALITY | D.SEELEY 7/12/12 |
| SAFETY | W.BORRELLI 7/11/12 |
| ENGINEER | A.DRAKE 7/12/12 |
| DESIGNER | K.RHODES 7/11/12 |
| REVIEWER | J.CHANGLE 7/11/12 |

CONTRACT NUMBER: NNC09BA02B
DELIVERY ORDER: SPACE 110
MODEL NAME: SI101MFA1520


NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO


# ACME CHAMBER INSERT ASSEMBLY LAUNCH CONFIGURATION

SI101MFA0100

## RADIOMETER ASSEMBLY

| SIZE | DRAWING NUMBER | REV | BLDG | AREA |
|---|---|---|---|---|
| D | SI101MFA1520 | D | ZIN | GRC |
| | | | UNITS: INCH | |
| SCALE: 1/1 | INITIAL REL DATE 7/13/12 | SHEET 1 OF 1 | DISCIPLINE MECHANICAL | |

PRO/E VERSION: Wildfire 2.0

SIZE D DRAWING NUMBER SI101MFA1520 REV D