COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
C1	3	PLTIM-M702Y	CABLE TIE, HALAR FLUOROPOLYMER, PANDUIT CORP.
C2	2	M39029/22-191	CONNECTOR CONTACT SOCKET, SIZE 22, MIL-C-39029
C3	1	FGG.0B.303.SYBD31	STRAIGHT PLUG CONNECTOR, 0B SERIES, LEMO
C4	A/R	M22759/11-22-0	22 AWG WIRE, SILVER COATED STRANDED COPPER, FLUOROPOLYMER INSULATED, EXTRUDED TFE, BLACK
C5	A/R	TRA-CAST 3145	ELECTRICALLY INSULATING EPOXY ADHESIVE, TRA-CON INC.
C6	-	DELETED	DELETED
C7	1	MS51830CA102	MINIATURE INSERT FOR .112-40 UNJC-3A IN. FASTENER
C8	3	FGG.0B.561.ZZC	LEMO MALE CONTACT, CRIMP TYPE
C9	A/R	50111000632S	EXPANDABLE BRAIDED SLEEVING, EXPANDO HR, 1/4 DIA., BLACK WITH WHITE TRACER, BENTLEY HARRIS
C10	1	FGG.0B.742.DN	COLLET, LEMO 0B SERIES, 3.2MM TO 4.2MM
C11	A/R	2216 B/A	2216 B/A GRAY EPOXY 3M SCOTCH WELD EPOXY
C12	1	BFG-0B-100-PCSG	CONNECTOR CAP (LEMO)
C13	1	S-14108	BAG, ANTI-STATIC, 6 IN. X 9 IN. (ULINE)
C14	A/R	SDG32104805-018	DECAL, ELECTROSTATIC SYMBOL
C15	1	SDG32112207-001	ZIPLOCK STOWAGE LABEL

DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	SI101MFD1318	IGNITER UPPER ARM, 30 MM POSITION
2	1	SI101MFD1321	IGNITER UPPER ARM INSULATOR
3	1	SI101MFT1317-XX	BAG CONTENTS LABEL
4	1	SI101MFT1317-03	CONNECTOR IDENTIFICATION LABEL
5	1	SI101MFT1317-XXX	BAG IMS LABEL

TENSILE PULL STRENGTH LIST

MANUFACTURER	CONTACT P/N	WIRE AWG	LBS
QPL	M39029/22-191	22	13
LEMO	FGG.0B.561.ZZC	22	12

CRIMP TOOL LIST

CONTACT P/N	CRIMP TOOL	POSITIONER	REF. DES.
M39029/22-191	M22520/2-01	K330-3	J8
FGG.0B.561.ZZC	M22520/7-01	DCE.91.090.BVC	P7

10. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

11. REMOVE COLLET FROM ITEM C3 AND DISCARD. REPLACE WITH ITEM C10.

12. STAKE BACKSHELL USING EPOXY (ITEM C11).

13. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.

14. SEE SHEET 2 FOR ADDITIONAL INFORMATION.

NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.

2. INSTALL THREADED INSERT PER MS51835. VERIFY INSERT IS BELOW SURFACE BEFORE SETTING KEYS.

3. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE 1, CLASS 3.

4. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.

5. HANDLE WITH CLEAN, LINT-FREE GLOVES.

6. HARNESS ASSEMBLY AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1, NASA-STD-8739.4 AND THE FOLLOWING NOTES:

   A. TWIST WIRES BETWEEN 8 AND 16 TIMES THE OUTER DIAMETER OF THE HARNESS.

   B. SEE TENSILE PULL STRENGTHS LIST PER NASA-STD-8739.4 AND/OR MANUFACTURERS SPECIFICATIONS.

   C. INSTALL CONTACTS IN ALL UNUSED POSITIONS OF CIRCULAR CONNECTOR.

   D. PERFORM CONTACT RETENTION TEST PER NASA-STD-8739.4 AND/OR MANUFACTURERS SPECIFICATIONS.

7. FILL CAVITIES IN ITEM 2 (INSULATOR) & COVER ANY EXPOSED WIRES WITH ITEM C5 (EPOXY) AS SHOWN.

8. FILL CAVITY BETWEEN ITEM 1 (UPPER ARM) & ITEM 2 (INSULATOR) WITH ITEM C5 (EPOXY) AS SHOWN.

9. TEST PER NASA-STD-8739.4 PARAGRAPH 18.2.6 USING THE FOLLOWING LEVELS:

   CONTINUTY: <.5 OHMS

   DWV VOLTAGE: 1500±75 VDC
   CURRENT: <1 MILLAMP
   DURATION: <1 MINUTE

   IR VOLTAGE: 500±75 VDC
   RESISTANCE: >100 MEG OHMS
   DURATION: <1 MINUTE

CHG	ZONE	DESCRIPTION	APP/DATE
F		INCORPORATED ACME-ECO-548	LF 11/07/16 AK 11/07/16 AD 11/08/16
E		INCORPORATED ACME-ECO-434	J.O. 04/28/15 G.F. 04/30/15 A.D. 05/15/15
D		INCORPORATED ACME-ECO-388	K.R. 11/06/14 A.D. 11/07/14 G.F. 11/07/14
C		INCORPORATED ACME-ECO-169	A.D. 08/21/13 K.R. 08/22/13 G.F. 08/21/13
B		INCORPORATED ACME-ECO-049	A.D. 02/21/13 K.R. 03/06/13 G.F. 02/21/13
A		INCORPORATED ACME-ECO-023 & ACME-ECO-030	A.D. 03/21/12 M.P. 03/21/12 G.F. 03/20/12

REVISIONS

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E. McCLOSKEY DATE: 11/08/2016

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			
TOLERANCE ON			
.X	± 0.03	PROJECT LEAD	B. BOROWSKI 05/24/11
.XX	± 0.01	QUALITY	D. SEELEY 05/23/11
.XXX	± 0.005	SAFETY	W. BORRELLI 05/24/11
FRACTION	± -	ENGINEER	A. DRAKE 05/18/11
ANGULAR	± 0.50°	DESIGNER	G. FEDEVICH 05/18/11
BREAK EDGES N/A		REVIEWER	M. PREVITE 05/18/11

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200

CONTRACT NUMBER: NNC09BA02B
DELIVERY ORDER: SPACE 110
MODEL NAME: SI101MFAI317

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

ACME CHAMBER INSERT ASSEMBLY

SI101MFA0100

IGNITER UPPER ARM ASSEMBLY, 30 MM POSITION


SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	SI101MFAI317	F	ZIN	GRC
			UNITS: INCH	
SCALE: 3/2	INITIAL REL DATE 05/24/2011	SHEET 1 OF 2	DISCIPLINE MECHANICAL	

PRO/E VERSION: Wildfire 2.0


SIZE D | DRAWING NUMBER SI101MFAI317 | REV F

NOTES:


1. SEE SHEET 1 FOR ADDITIONAL INFORMATION, GENERAL NOTES AND TOLERANCES.

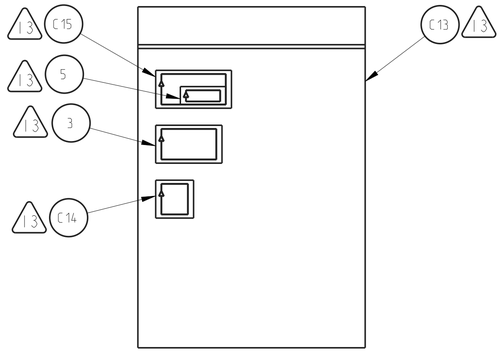

SCALE 1/2





VIEW C - C

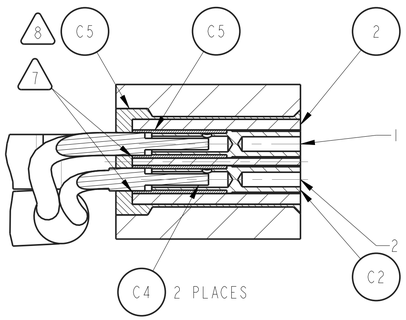


NOTE: SOCKET INSIDE DIAMETER MUST BE EPOXY FREE

SECTION A - A
SCALE 6/1

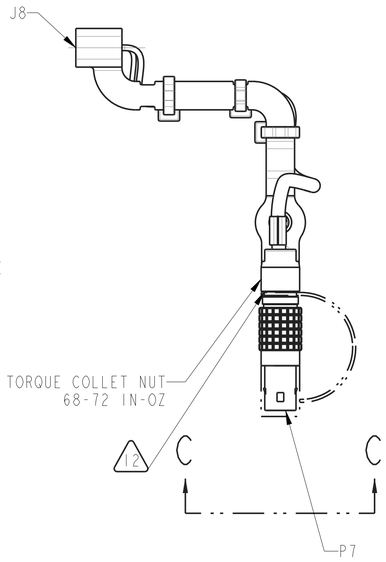

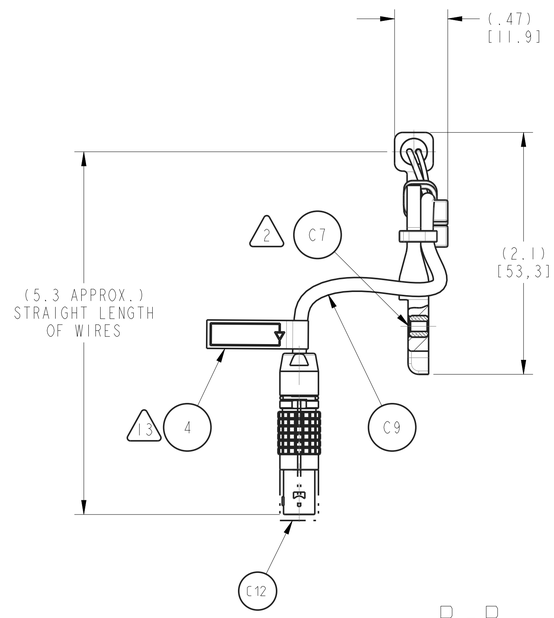

SECTION B - B

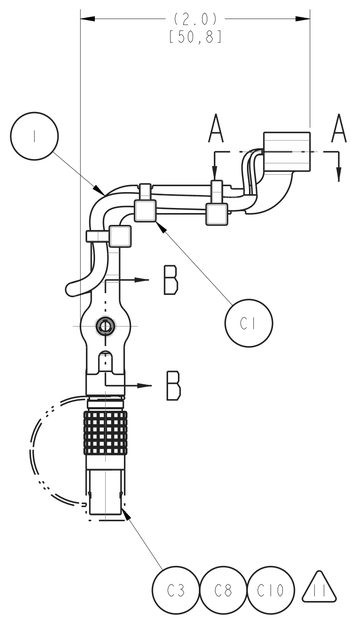



CHG	ZONE	DESCRIPTION	APP/DATE
REVISIONS			

SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	S1101MFA1317	F	ZIN	GRC
			UNITS: INCH	
SCALE: 3/2	INITIAL REL DATE 05/24/2011	SHEET 2 OF 2	DISCIPLINE MECHANICAL	

PRO/E VERSION: Wildfire 2.0

SIZE D DRAWING NUMBER S1101MFA1317 REV F