
COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION	MANUFACTURER
C1	1	SND9S1000G	CONNECTOR, FEMALE SD D-SUB, 9 CONTACTS	POSITRONICS
C2	A/R	FC6020M2	CONTACT, SOCKET, SIZE 20, AWG 20-24	POSITRONICS
C3	1	557-398UC1EMSB-2	BACKSHELL	GLENAIR
C4	1	600-057	BACKSHELL MICRO BAND	GLENAIR
C5	A/R	2142SV005	BRAIDED EMI SHIELDING, 1/4" DIA.	ALPHA
C6	A/R	THFE4-225011	SHRINK TUBING, EXPANDED PREHEAT ID .225"	SAINT GOBAIN
C7	A/R	5011000632S	EXPANDABLE BRAIDED SLEEVING 1/4"	BENTLEY HARRIS
C8	A/R	PLT1M-M702Y	CABLE TIE, FLUOROPOLYMER	PANDUIT
C9	A/R	M22759/11-24-0	1/C, 24 AWG, PTFE INSULATED, BLACK	QPL
C10	A/R	2216 B/A GRAY	EPOXY, 2 PART	3M
C11	A/R	P-224X.5	KAPTON TAPE 1/2"	

LABEL LIST	
ITEM	INSCRIPTION
L1	P12
L2	S1101EFA1607 SN xxxx



SCHEMATIC

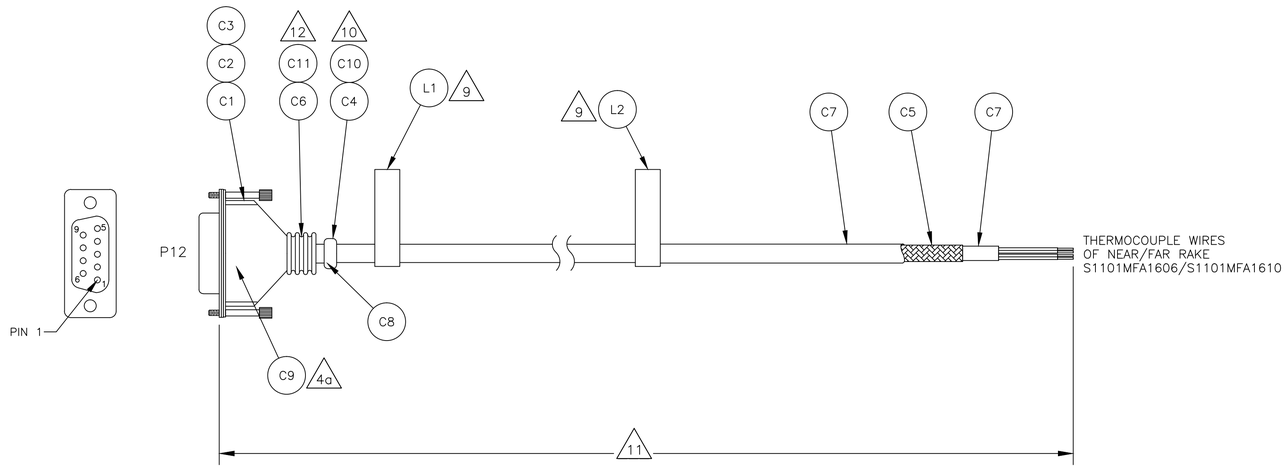

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. HARNESS ASSEMBLY AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.4 AND THE FOLLOWING NOTES:
   a. USE #32 AWG AND #24 AWG (ITEM C9) AS FILLER WIRES WITHIN #20 AWG CONTACTS.
5. SEE TENSILE PULL STRENGTHS LIST PER NASA-STD-8739.4 AND/OR MANUFACTURER'S SPECIFICATION.
6. INSTALL CONTACTS IN ALL UNUSED POSITIONS OF D-SUB CONNECTOR.
7. PERFORM CONTACT RETENTION TEST PER NASA-STD-8739.4. CONTACTS REQUIRING A PULL TEST FOR RETENTION SHALL BE PERFORMED AS FOLLOWS: A GENTLE PULL ON THE WIRE SHALL BE USED TO DETERMINE IF THE CONTACT IS SEATED PROPERLY.
8. TERMINATE SHIELDS INTO BACKSHELL PER MANUFACTURERS SPECIFICATION.
9. APPLY TEMPORARY CABLE IDENTIFICATION LABELS P/N TZ211.
   NOTE: TO BE REMOVED AT INSTALLATION INTO FINAL ASSEMBLY.
10. APPLY EPOXY (ITEM C10) TO SHARP EDGES OF ITEM C4, MICRO BAND OF CONNECTOR AND RAKE OF NEXT ASSEMBLY.
11. TERMINATE TO THE LENGTH AS INDICATED ON NEXT LEVEL ASSEMBLY.
12. ITEM C11 USED TO COVER FOLDED END OF ITEM C5 OVER BACKSHELL COLLAR.
13. TO BE BUILT IN CONJUNCTION WITH S1101MFA1606/S1101MFA1610 WHICH COMBINE INTO FINAL ASSEMBLIES S1101MFA1605/S1101MFA1609 RESPECTIVELY.
14. PERFORM CONTINUITY TEST BETWEEN ALL PINS AND BACKSHELL PER NASA-STD-8739.4 PARA 18.2.6.A
15. PLACE COMPLETED ASSEMBLY IN CLEAN, STATIC-SHIELDING PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/STATEMENT OF WORK PER SAE AS478, METHOD 35D. STORE IN A PROJECT APPROVED STORAGE AREA.

CRIMP TOOL LIST				
CONTACT P/N	CRIMP TOOL	POSITIONER	I/E TOOL	REF. DES.
FC6020M2	M22520/2-01	M22520/2-08	M81969/1-02	P12

TENSILE PULL STRENGTH LIST			
MANUFACTURER	CONTACT P/N	WIRE AWG	LBS
POSITIONICS	FC6020M2	24	8

REV	DESCRIPTION	APPROVED
B	REVISED PER ACME-ECO-437	MH 4/14/15 DS 4/14/15 JO 4/16/15
A	REVISED PER ACME-ECO-280	MH 8/14/14 TG 8/15/14 RP 8/20/14

REVISION HISTORY

S1101MFA1605
S1101MFA1609
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E. McCLOSKEY 4/16/15

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	M. HOMKO 3/25/13	QUALITY	D. SEELEY 4/1/13
REVIEWER	J. BRUEWER 3/28/13	MATERIALS	M. WILKINSON 3/25/13
MECHANICAL	A. DRAKE 3/25/13	PROJ LEAD	B. BOROWSKI 4/1/13
ELECTRICAL	T. GOBELI 3/26/13		
STRUCTURAL	C. WERNER 3/26/13		
SAFETY	W. BORRELLI 3/25/13		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
THERMOCOUPLE NEAR/FAR RAKE HARNESS ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101EFA1607	B

SCALE NONE | INITIAL REL DATE 04/01/13 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL NAME: S1101EFA1607_REV_B.DWG

AutoCAD 2012

DWG NO S1101EFA1607 | SH 1 | REV B