
| DRAWING LIST | | | |
|---|---|---|---|
| ITEM | QTY | PART NUMBER | DESCRIPTION |
| 1 | 1 | S1101MGA5018-01 | ACME VIBE FOAM C, LAYER 2 |
| 2 | 1 | S1101MGA5018-02 | ACME VIBE FOAM C, LAYER 3 |
| 3 | 4 | S1101MGA5018-03 | ACME VIBE FOAM C, LAYER 1 , 4, 5, 6 |

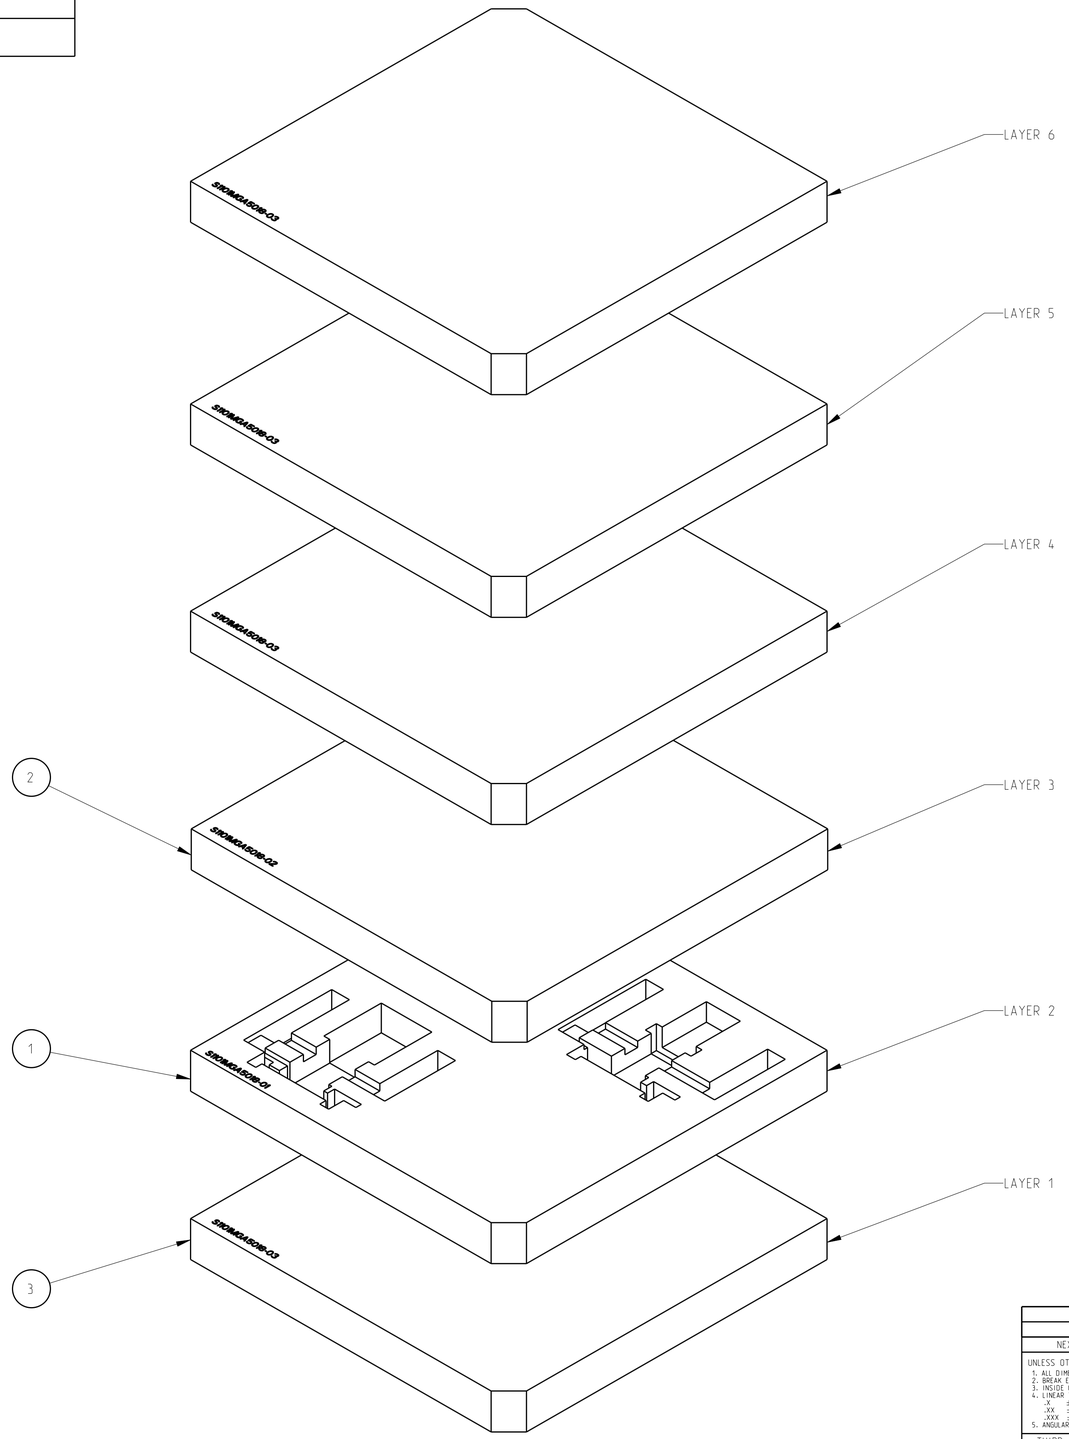


NOTES:

1. HANDLE WITH CLEAN, LINT-FREE GLOVES.
2. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .01
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: *E.McCLOSKEY 2/16/16*

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

| | | | |
|---|---|---|---|
| DESIGNER | A.REID 2/9/16 | QUALITY | L.WRIGHT 2/16/16 |
| REVIEWER | G.FEDEVICH 2/9/16 | MATERIALS | M.WILKINSON 2/9/16 |
| MECHANICAL | A.DRAKE 2/16/16 | PROJ LEAD | B.BORDWSKI 2/16/16 |
| ELECTRICAL | T.GOBELI 2/9/16 | | |
| STRUCTURAL | C.WERNER 2/16/16 | | |
| SAFETY | M.BORRELLI 2/9/16 | | |

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

| REV | DESCRIPTION | APPROVED |
|---|---|---|
| REVISION HISTORY | | |

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE: ACME VIBE FOAM C

| SIZE | CAGE CODE | DWG NO | REV |
|---|---|---|---|
| D | 0SG68 | S1101MGA5018 | - |

SCALE 33/100 | INITIAL REL DATE | SHEET 1 OF 4

RELEASE LEVEL: WORKING
MODEL: S1101MGA5018


PRO/E VERSION: Creo 2.0

DWG NO S1101MGA5018 | SH 1 | REV -


ZIN_D_2012.frm

NOTES:


1. MATERIAL: EXTRUDED POLYSTYRENE (XPS) RIGID FOAM PER ASTM C578 TYPE X. LAYER THICKNESS AS NEEDED. BONDING MATERIAL: SCOTCH ATG ADHESIVE TRANSFER TAPE 969 AS REQUIRED.
2. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
3. HANDLE WITH CLEAN, LINT-FREE GLOVES.
4. MARK PART NUMBERS IN APPROXIMATE LOCATIONS SHOWN WITH SHARPIE 30000 SERIES PERMANENT MARKER.
5. SEE SHEET 1 FOR ADDITIONAL INFORMATION AND GERNERAL NOTES.

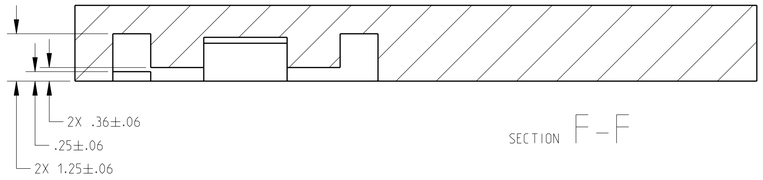


SECTION F-F

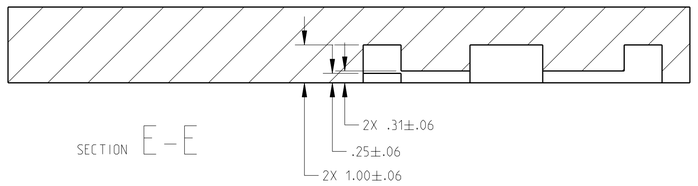


SECTION E-E

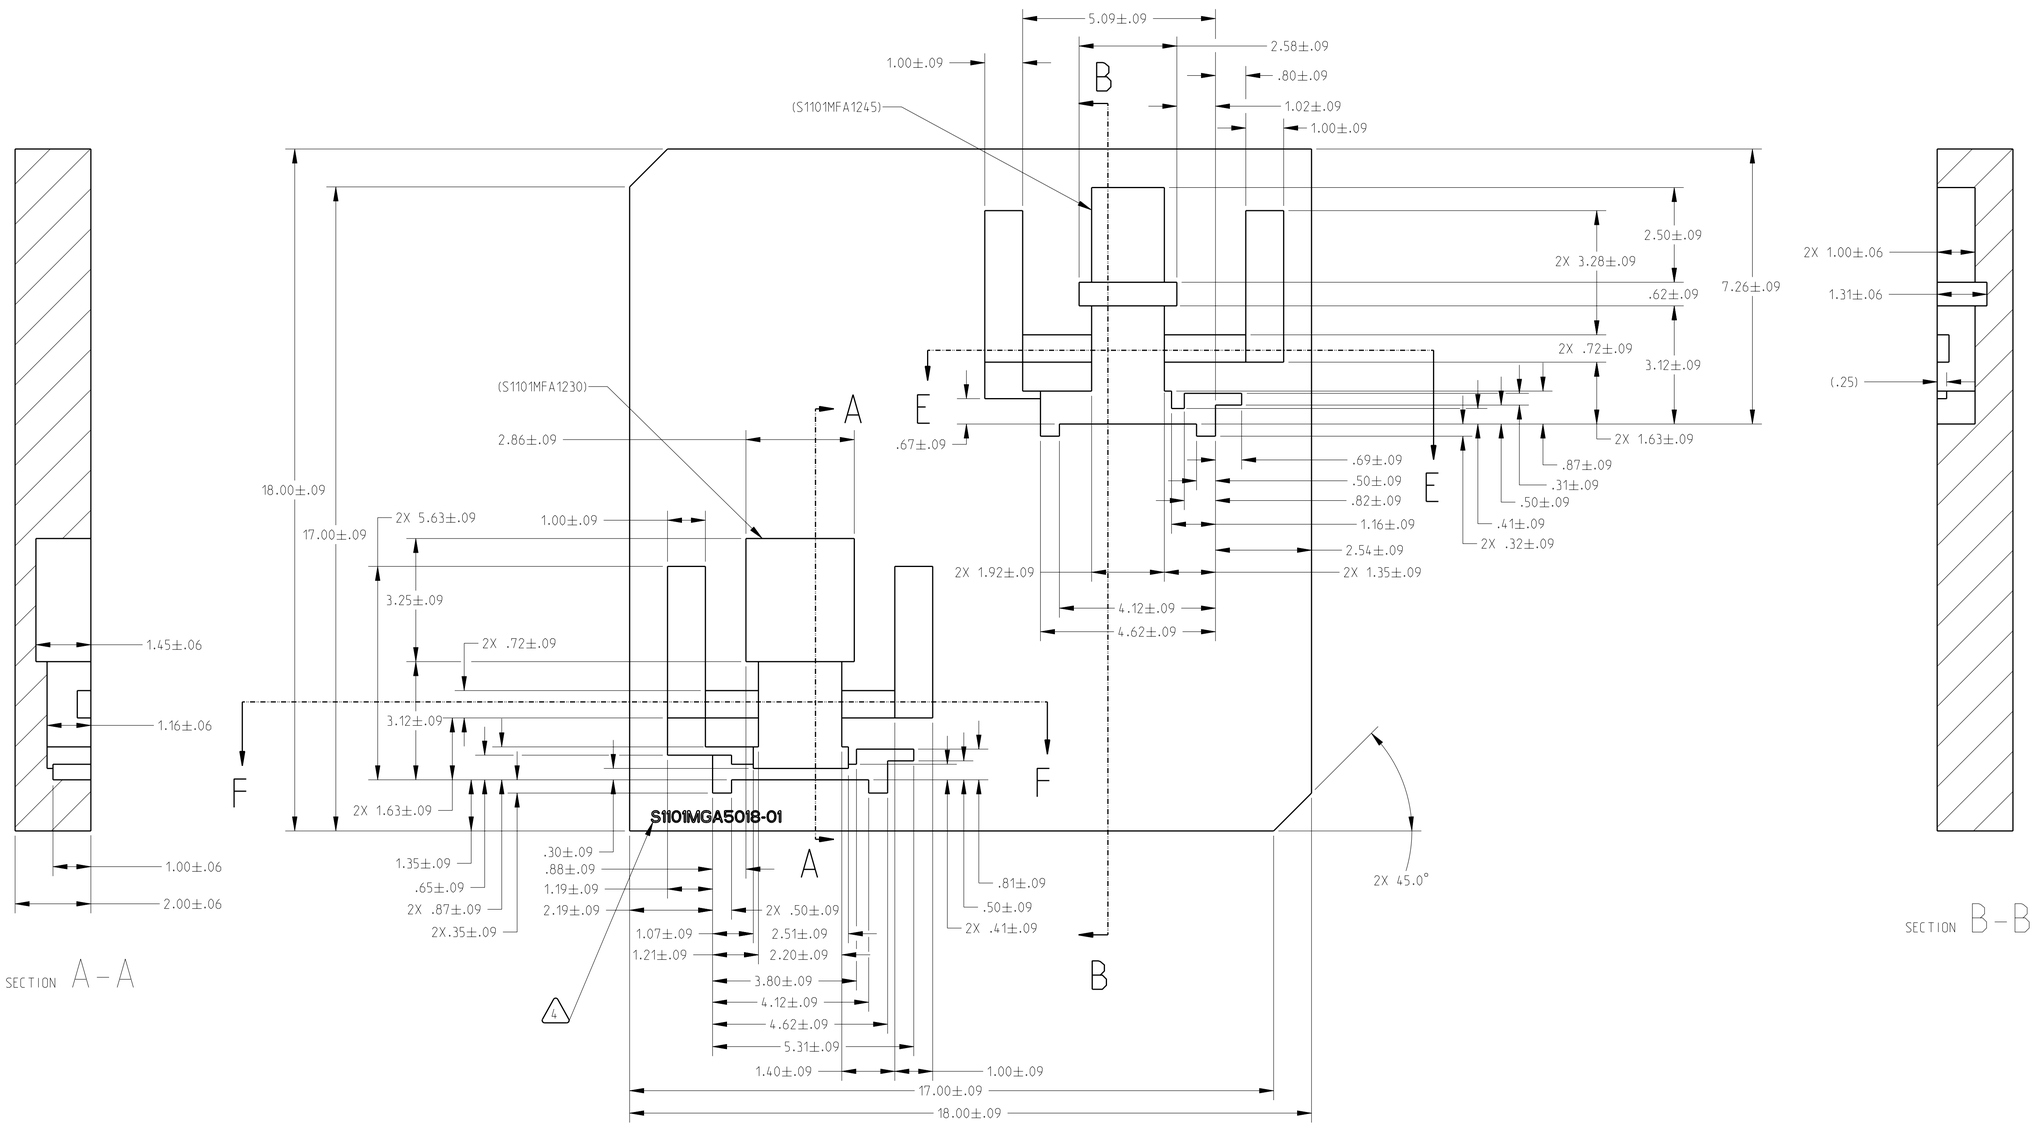


SECTION A-A

SECTION B-B

S1101MGA5018-01

| SIZE | CAGE CODE | DWG NO | REV |
|---|---|---|---|
| D | 0SG68 | S1101MGA5018 | - |
| SCALE 7/10 | INITIAL REL DATE | SHEET 2 OF 4 | |


PRO/E VERSION: Creo 2.0


ZIN_D_2012.frm


DWG NO S1101MGA5018 SH 2 REV -

NOTES:

1. SEE SHEET 2 FOR ADDITIONAL INFORMATION. GENERAL NOTES AND TOLERANCES.

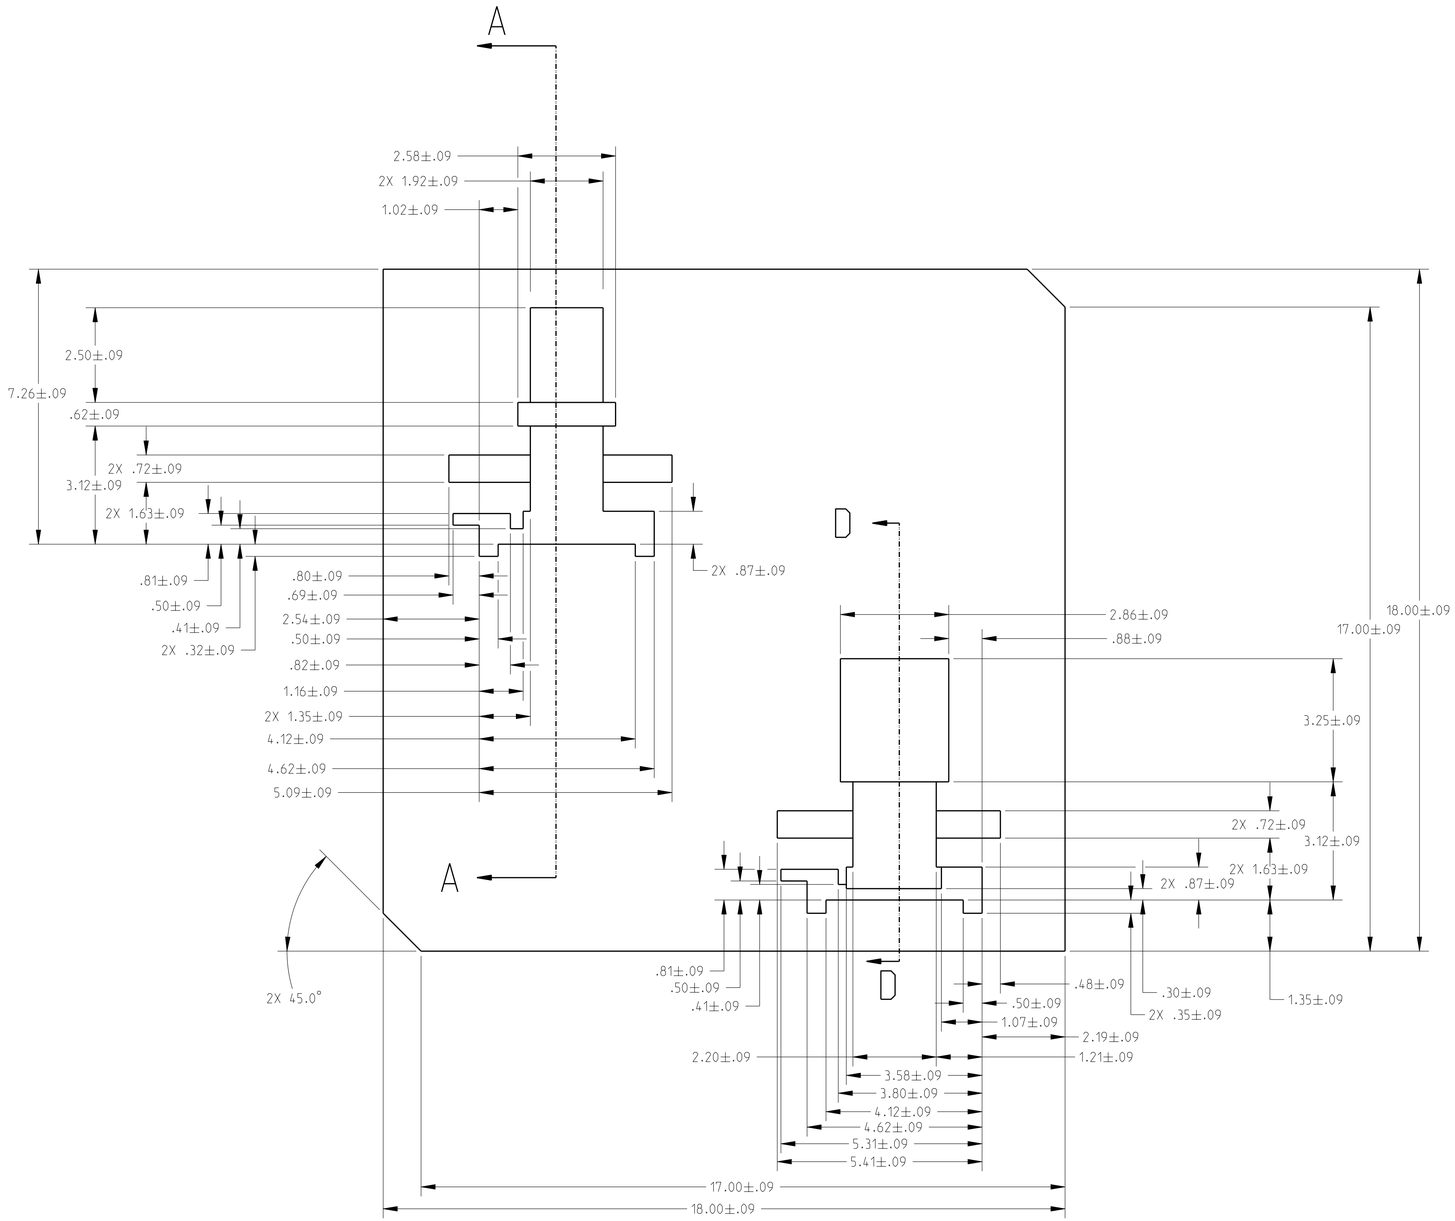

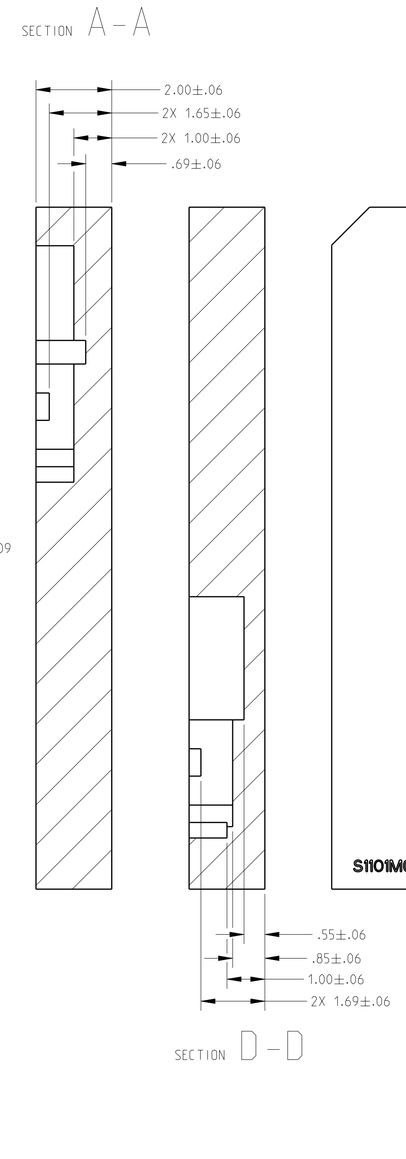
SECTION D – D

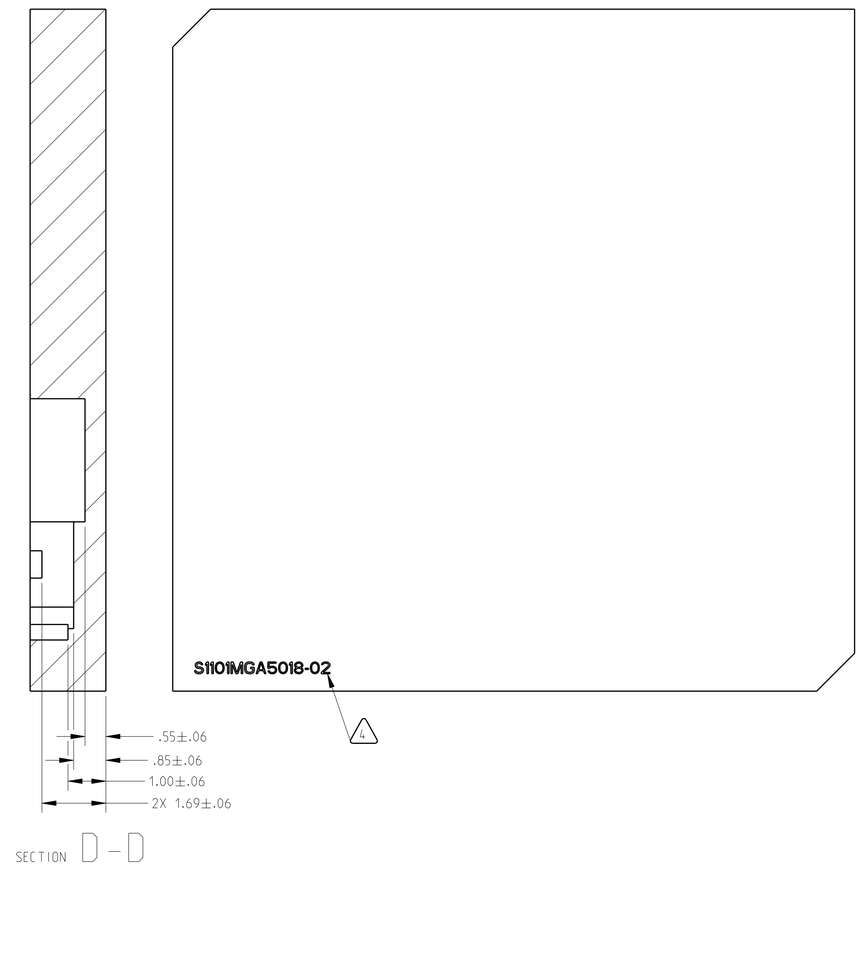S1101MGA5018-02

| SIZE | CAGE CODE | DWG NO | REV |
|---|---|---|---|
| D | 0SG68 | S1101MGA5018-01 | - |
| SCALE 33/100 | INITIAL REL DATE | SHEET 3 OF 4 | |


ZIN_D_2012.frm


PRO/E VERSION: Creo 2.0

DWG NO S1101MGA5018-01 SH 3 REV -

NOTES:

1. SEE SHEET 2 FOR ADDITIONAL INFORMATION. GENERAL NOTES

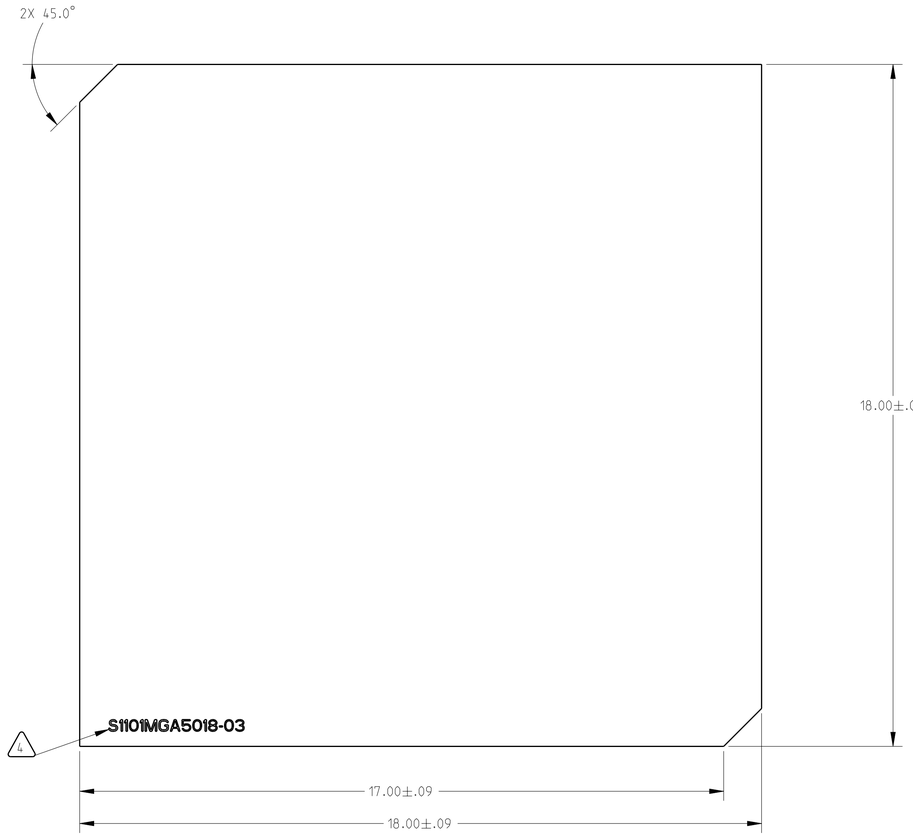

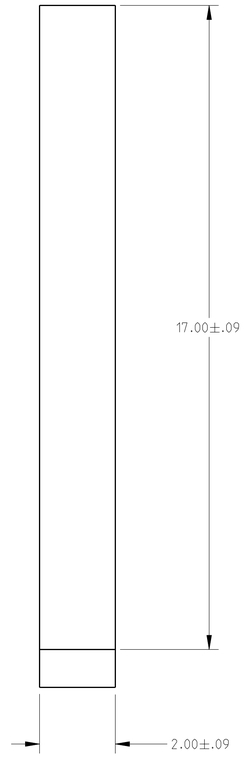
S1101MGA5018-03

| SIZE | CAGE CODE | DWG NO | REV |
|---|---|---|---|
| D | 0SG68 | S1101MGA5018 | - |
| SCALE 33/100 | INITIAL REL DATE | SHEET 4 OF 4 | |

ZIN_D_2012.frm

PRO/E VERSION: Creo 2.0

DWG NO S1101MGA5018-02 SH 4 REV -