COMMERCIAL PARTS LIST


ITEM	QTY	PART NUMBER	DESCRIPTION
C1	6	M83248/1-010	O-RING, 75 DUROMETER FLUOROCARBON, .239 ID X .070 W
C2	2	M83248/1-904	O-RING, 75 DUROMETER FLUOROCARBON, .351 ID X .072 W
C3	1	M83248/1-908	O-RING, 75 DUROMETER FLUOROCARBON, .644 ID X .087 W
C4	1	51129-06F04VD	QUICK DISCONNECT NIPPLE, 04 FITTING SIZE, PREECE
C5	12	NAS620C6L	#6 REDUCED THICKNESS FLAT WASHER REDUCED O.D.
C6	12	NAS1352N06-8	#6-32 (.138) UNRC-3A X .500 SOCKET HEAD CAP SCREW
C7	3	E121F43	LUCIFER TWO-WAY SOLENOID VALVE, PARKER
C8	1	942-042F04VD	QUICK DISCONNECT NIPPLE, 04 FITTING SIZE, PREECE
C9	1	51316-2-08-F08-V	QUICK DISCONNECT NIPPLE, 08 FITTING SIZE, PREECE
C10	A/R	MIL-PRF-27617	DUPONT KRYTOX 240AC TYPE III LUBRICANT

DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	S1101MFA1101	INPUT MANIFOLD INSERT ASSEMBLY
2	3	S1101MFA1107	SOLENOID COIL ASSEMBLY
3	1	S1101EFA1110	INPUT MANIFOLD HARNESS ASSEMBLY

NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. DISCARD O-RINGS SUPPLIED WITH SOLENOID VALVE ITEM C7 AND REPLACE WITH ITEM C1.
4. APPLY O-RING LUBRICANT PER ESTABLISHED PROCEDURES.
5. REFER TO S1101EFA1110 FOR WIRING INTERCONNECTION.
6. PRECISION CLEAN FOR OXYGEN SERVICE IN ACCORDANCE WITH CIR-PRO-1373.
7. REMOVED
8. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
9. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
10. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW PER SAE-AS478, METHOD 35D.
11. SPARINGLY APPLY A THIN COAT OF LUBRICANT TO THREADS TO PREVENT GALLING.

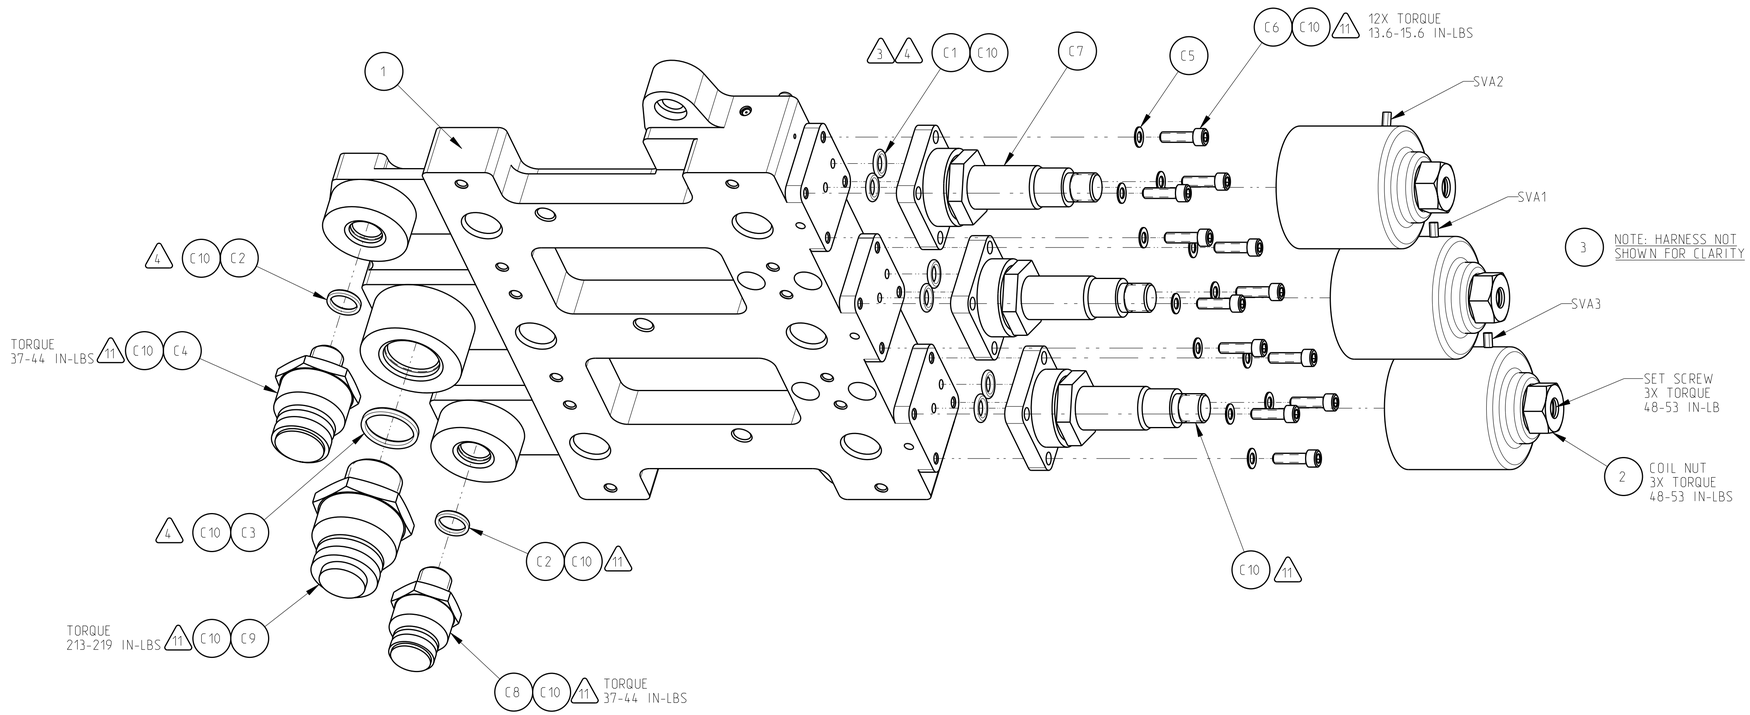

REV	DESCRIPTION	APPROVED
B	INCORPORATED ACME-ECO-436 AND ACME-ECO-467.	J.OGRIN 05/08/15 A.DRAKE 05/15/15 G.FEDEVICH 05/19/15
A	INCORPORATED ACME-ECO-183.	K.RHODES 02/04/15 G.FEDEVICH 02/05/15 A.DRAKE 02/05/15

REVISION HISTORY

S1101MFA0100
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
.X ± .03
.XX ± .01
.XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: *E.McCLOSKEY 05/19/15*
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	G.FEDEVICH 09/12/12	QUALITY	D.SEELEY 09/13/12
REVIEWER	M.PREVITE 09/14/12	MATERIALS	M.WILKINSON 09/13/12
MECHANICAL	A.DRAKE 09/13/12	PROJ LEAD	B.BOROWSKI 10/04/12
ELECTRICAL	T.GOBELI 09/13/12		
STRUCTURAL	C.WERNER 10/02/12		
SAFETY	W.BORRELLI 09/13/12		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
8745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
INPUT MANIFOLD ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1100	B

SCALE 1/1 | INITIAL REL DATE 10/04/2012 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL: S1101MFA1100

PRO/E VERSION: Wildfire 2.0

REV B | SH 1 | DWG NO S1101MFA1100

ZIN_D_2012.frm