
COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	1	4-6 F5OG5-SS	STRAIGHT THREAD ADAPTOR 7/16-20 SAE TO 9/16-18 SAE (PARKER)
C2	1	51410-2-06-1-V-TF06-C-G	QUICK DISCONNECT NIPPLE (PREECE INC.)
C3	1	63990A001	ACCUMULATOR B ASSEMBLY (BELFAB PRODUCTS)
C4	1	3-906 V0709-90	O-RING, .078 WIDE X .468 ID, FPM 90 DURO (PARKER)
C5	1	3-904 V0709-90	O-RING, .072 WIDE X .351 ID, FPM 90 DURO (PARKER)
C6	A/R	1838 B/A GREEN	SCOTCHWELD EPOXY ADHESIVE (3M)
C7	A/R	MIL-PRF-27617	KRYTOX 240AC, TYPE III LUBRICANT (DUPONT)
C8	A/R	MS20995C032	SAFETY WIRE, .032 DIA STAINLESS STEEL
C9	1	SKD39123122-211	DECAL, HAZARDOUS/NONHAZARDOUS LOGO IVA 15MM, DIGIT 0, GREEN FIELD


DRAWING LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	S1101MFT0406-01	CONNECTOR LABEL
2	1	S1101MFT0406-XXX	COMBO LABEL

TORQUE TABLE		
ITEM	TORQUE RANGE	UNITS
T1	75±1	IN-LB
T2	56±1	IN-LB

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ASSEMBLE PER APPROVED PROCESS PLAN ACME-PROP-089 FOR INITIAL BUILD.
3. REMOVE STOCK O-RING FROM ITEM C1 AND REPLACE WITH ITEM C5
4. PRIOR TO INSTALLATION APPLY THIN FILM OF LUBRICANT TO O-RING AND EXTERNAL THREADS TO PREVENT GALLING.
5. ITEMS C2 AND C3 TO BE LOCKWIRED PER NASM33540. PIGTAIL MADE AT THE END OF THE WIRING SHALL BE BENT BACK OR UNDER AND COVERED WITH EPOXY, C6, TO PREVENT IT FROM BECOMING A SNAG.
6. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
7. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATIONS SHOWN WITH ARROW INDICATING TOP OF LABEL WITH RESPECT TO LETTERING DIRECTION. USE PAPER OR CARD STOCK BLOTTER TO PROTECT SURFACES FROM FINGER PRINTS AND SMUDGES DURING APPLICATION.
8. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

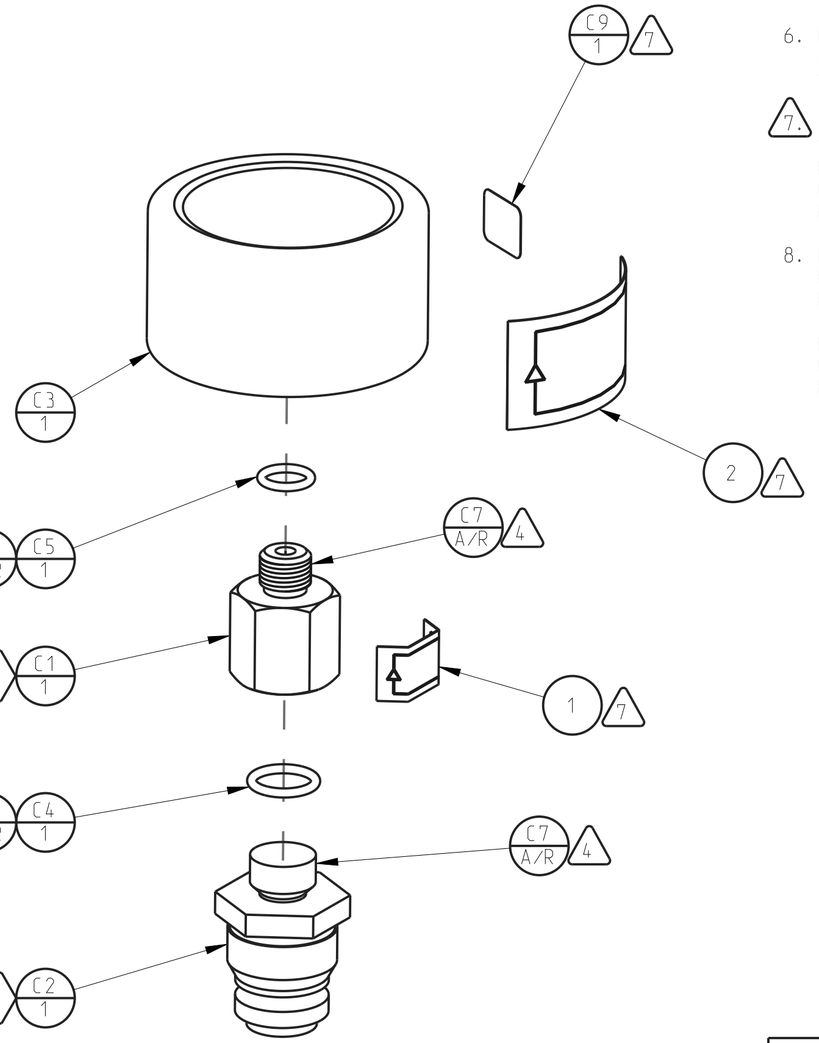

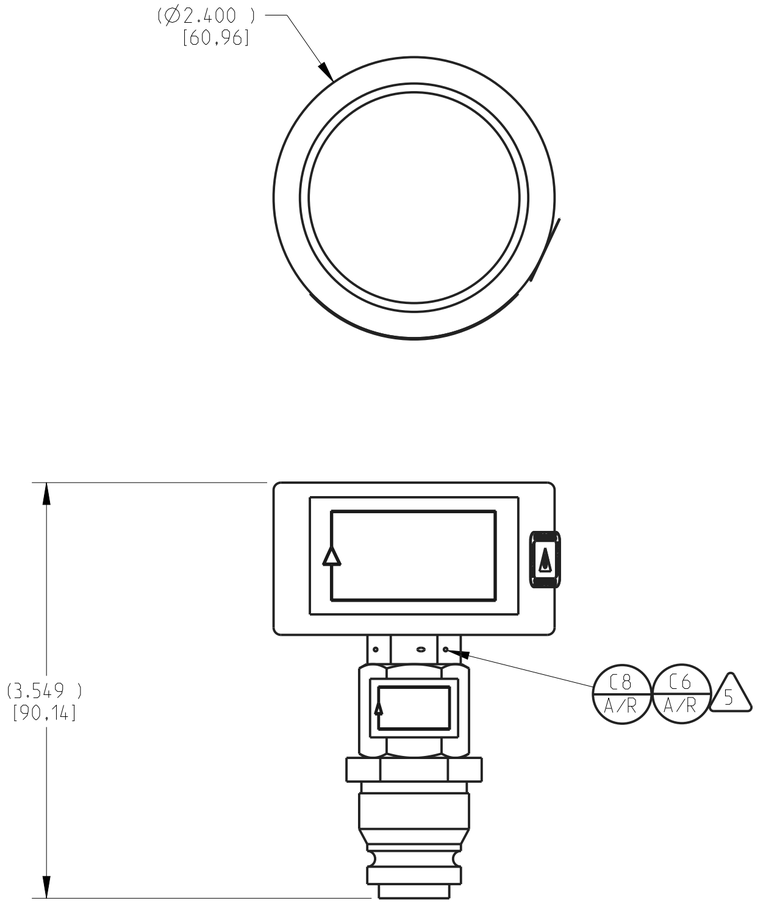

REV	DESCRIPTION	APPROVED
A	INCORPORATED ACME-ECO-657.	LF 12/07/16 KB 12/07/16 AD 12/07/1

REVISION HISTORY

S1101MFA0100	
NEXT ASSEMBLY	
UNLESS OTHERWISE SPECIFIED: 1. ALL DIMENSIONS ARE IN INCHES 2. BREAK EDGES .010-.020 3. INSIDE CORNERS R.02 MAX 4. LINEAR TOLERANCES: .X ± .03 .XX ± .01 .XXX ± .005 5. ANGULAR TOLERANCE ± .5°	
THIRD ANGLE PROJECTION	

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: *E.McCLOSKEY 12/08/2016*

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	K.BURNS 09/12/16	QUALITY	L. WRIGHT 09/02/16
REVIEWER	J.OGRIN 09/01/16	MATERIALS	M.WILKINSON 09/06/16
MECHANICAL	A.DRAKE 09/06/16	PROJ LEAD	B.BOROWSKI 09/09/16
ELECTRICAL	T. GOBELI 07/07/16		
STRUCTURAL	C.WERNER 09/08/16		
SAFETY	W. BORRELLI 09/01/16		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE

ACCUMULATOR ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101MFA0406	A

SCALE	INITIAL REL DATE	SHEET
1/1	09/12/2016	1 OF 1

RELEASE LEVEL: RELEASED
MODEL: S1101MFA0406

PRO/E VERSION: Creo 2.0

REV A
SH 1
DWG NO S1101MFA0406

ZIN_C_2012.frm