PARTS LIST

Item	Qty	REFERENCE DESIGNATOR	PART NUMBER	DESCRIPTION	MANUFACTURER
1	1		S1101EFF3214	BARE BOARD	ZIN TECHNOLOGIES
2	3	C1, C2, C3	T494B106K016AT	CAPACITOR 10.0uF 16V TANTALUM 10% B-SIZE SMD	KEMET
3	2	C4, C5	C0805C104K1RACTU	CAPACITOR, CERAMIC, 0.1uF, 100V, 10%, 0805	KEMET
4	1	J1	15-44-5840	CONNECTOR HEADER 40POS 2X20 2.54MM PITCH GOLD	MOLEX
5	1	J2	5103311-6	CONNECTOR HEADER 26POS 2X13 2.54MM PITCH R/A GOLD	TE CONNECTIVITY
6	1	J3	70553-0112	CONNECTOR HEADER 8POS 1X8 2.54MM PITCH R/A GOLD	MOLEX
7	1	R1	ERJ-6ENF75R0V	RESISTOR, 75 OHM, 1/8W, 1%, 0805 SMD	PANASONIC - ECG
8	2	R2, R3	ERJ-6ENF37R4V	RESISTOR, 37.4 OHM, 1/8W, 1%, 0805 SMD	PANASONIC - ECG
9	1	U1	MAX4448ESE	SINGLE ENDED TO DIFFERENTIAL LINE DRIVER	MAXIM
10	1	U2	MAX829	IC, SWITCHED CAPACITOR VOLTAGE INTERTER, SOT23-5	MAXIM
11	A/R		TZE-211	LABEL, 1/4"BLK LETTERS WHT BACKROUND	BROTHER
12	A/R		3140	RTV FOR CONFORMAL COATING	DOW CORNING
13	A/R		PR-1204	PRIMER FOR CONFORMAL COATING	DOW CORNING
14	A/R		SN63PB37/RMA	SOLDER	

7. CONFORMAL COATING, STAKING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1 AND THE FOLLOWING NOTES:
   A. PERFORM CLEANLINESS TEST.
   B. BAKE PWA AT 93°C ±5.5°C (200°F ±10°F) FOR 4 HOURS PRIOR TO CONFORMAL COATING.
   △C MASK OFF ALL DESIGNATED AREAS USING KAPTON TAPE. ALL MASKING OPERATIONS SHALL BE PERFORMED UNDER AN AIR IONIZER.
   △D MEASURE CONFORMAL COATING THICKNESS AT DESIGNATED AREAS.
   E. CONFORMAL COAT THE COMPLETE ASSEMBLY USING ITEM 12 AND ITEM 13.
8. PLACE THE COMPLETED ASSEMBLY IN CLEAN, STATIC DISSIPATIVE PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER PER SAE AS478, METHOD 35. STORE IN A PROJECT APPROVED STORAGE AREA.
9. REFERENCE SCHEMATIC: S1101EFS3214
10. MENTOR CONTROL FILES: S1101EFA3214_REV_C.ZIP

NOTES: UNLESS OTHERWISE SPECIFIED

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. DEMOISTURIZE (BAKE OUT) PWB (ITEM 1) FOR A MINIMUM OF 2 HOURS AT 93°C ±5.5°C (200°F ±10°F.) PERFORM SOLDERING IMMEDIATELY AFTER BAKING, OR STORE IN A CLEAN, DRY, SEALED STATIC DISSIPATIVE BAG OR CONTAINER.

△5 MARK THE ASSEMBLY WITH REV AND S/N USING ITEM 11.

6. ASSEMBLY, SOLDERING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.2, NASA-STD-8739.3, AND THE FOLLOWING NOTES:
   A. INSTALL AND SOLDER ALL SURFACE MOUNT (SMT) PART BEFORE THROUGH HOLE PARTS USING SOLDER (ITEM 14.)
   B. FOR THROUGH HOLE PARTS, LEAD TERMINATIONS SHALL BE STRAIGHT THROUGH (NOT LAPPED OR CLINCHED.)

REVISION HISTORY

REV	DESCRIPTION	APPROVED
C	REVISED PER ACME-ECO-248 AND ACME-ECO-326	RJP 6/12/14 DAS 6/12/14 TAG 6/12/14
B	REVISED PER ACME-ECO-204	RJP 8/13/13 DAS 8/13/13 TAG 8/13/13
A	REVISED PER ACME-ECO-142	RJP 4/17/13 MTH 4/18/13 TAG 4/18/13

.

S1101MFA3200

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCES: ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E. McCLOSKEY 6/12/14

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	R. PFEIFFER 11/7/12	QUALITY	D. CHOVAN 11/8/12
REVIEWER	D. STRANG 11/7/12	MATERIALS	M. WILKINSON 11/7/12
MECHANICAL	A. DRAKE 11/8/12	PROJ LEAD	B. BOROWSKI 11/8/12
ELECTRICAL	M. SAVINA 11/8/12	LEAD ENGR	T. GOBELI 11/8/12
STRUCTURAL	W. DIAL 11/8/12	-	-
SAFETY	W. BORRELLI 11/7/12	-	-

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
DELIVERY CODE: SPACE110

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
WWW.ZIN-TECH.COM

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
ACME VGA INTERFACE BOARD ASSEMBLY DRAWING


SIZE	CAGE CODE	DWG NO	REV
C	OSG68	S1101EFA3214	C

SCALE: NONE | INITIAL REL DATE 11/8/12 | SHEET 1 OF 2


RELEASE LEVEL: .
MODEL NAME: S1101EFA3214_REV_C.bpd

BLUEPRINT
VERSION 3.0

DWG NO S1101EFA3214 REV C SH 1

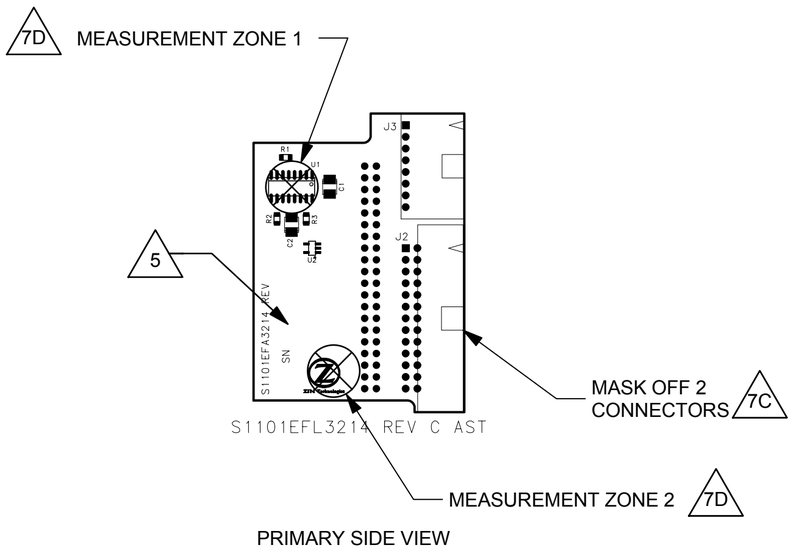

PRIMARY SIDE VIEW

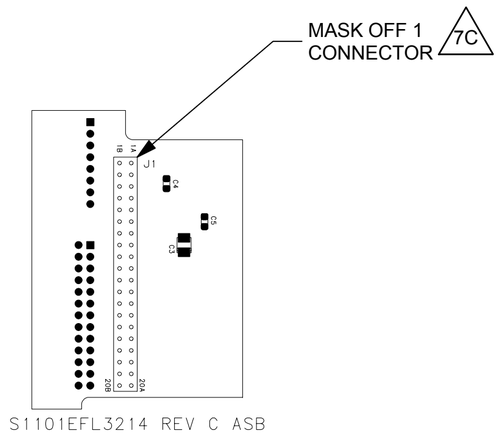

SECONDARY SIDE VIEW

SIZE	CAGE CODE	DWG NO	REV
C	OSG68	S1101EFA3214	C
SCALE: NONE	INITIAL REL DATE 11/8/12	SHEET 2 OF 2	

BLUEPRINT
VERSION 3.0

REV C
SH 2
DWG NO S1101EFA3214