

COMMERCIAL PARTS LIST


ITEM	QTY	PART NUMBER	DESCRIPTION	MANUFACTURER
C1	1	51110-1050	CONNECTOR, RECEPT, 10 POS, 2.00mm PITCH	MOLEX
C2	10	50394-8200	CONTACT, SOCKET, AWG 24-30	MOLEX
C3	1	CR-2032L/F1N	BATTERY LITHIUM COIN 3V W/TABS	PANASONIC
C4	A/R	M22759/11-24-0	1/C, 24 AWG, PTFE INSULATED, BLACK	QPL
C5	A/R	M22759/11-24-2	1/C, 24 AWG, PTFE INSULATED, RED	QPL
C6	A/R	MFP-3/16-CLEAR-10-10PC	PVDF HEAT SHRINK TUBING, NOM DIA 3/16"	QPL
C7	A/R	AMS-DTL-23053/13-006	VITON HEAT SHRINK TUBING-EXPANDED ID 3/4"	QPL
C8	A/R	Sn63Pb37	SOLDER RMA FLUX	QPL

LABEL LIST	
ITEM	INSCRIPTION
L1	P200
L2	S1101EFA3216 SN xxxx

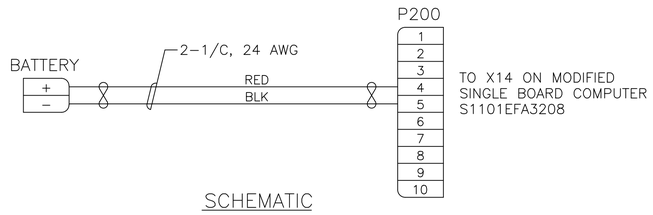

SCHEMATIC

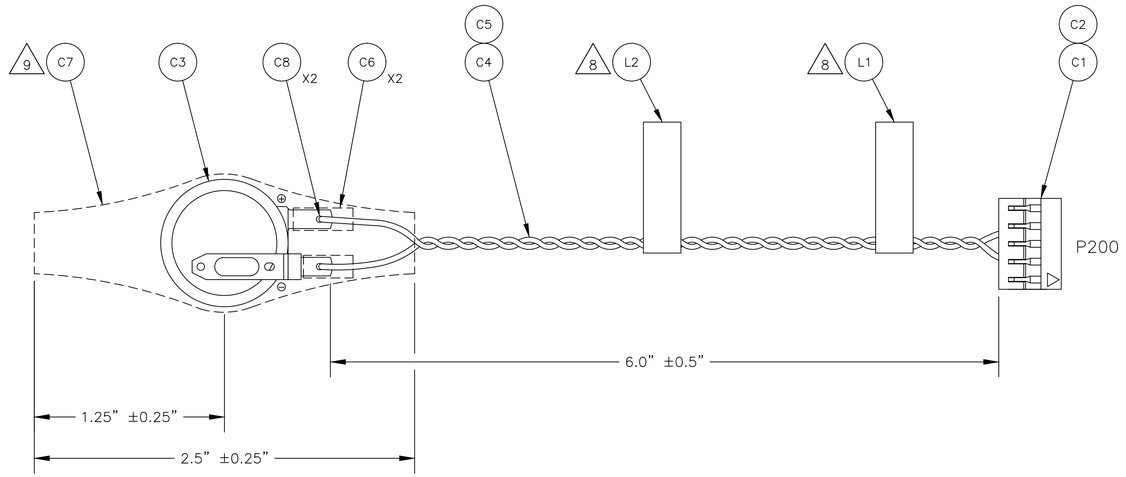



NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. HARNESS ASSEMBLY AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.3, NASA-STD-8739.4, AND THE FOLLOWING NOTES:
   a. WIRE TWIST SHALL BE BETWEEN 8 AND 16 TIMES THE OUTER DIAMETER OF THE HARNESS UNLESS OTHERWISE NOTED. (FROM NASA-STD-8739.4 PARA 7.3.20)
5. SEE TENSILE PULL STRENGTHS LIST PER NASA-STD-8739.4 AND/OR MANUFACTURER'S SPECIFICATION.
6. INSTALL CONTACTS IN ALL UNUSED POSITIONS OF CONNECTOR. CRIMP UNUSED CONTACTS PRIOR TO INSTALLATION.
7. PERFORM CONTACT RETENTION TEST PER NASA-STD-8739.4 AND/OR MANUFACTURER'S SPECIFICATIONS. CONTACTS REQUIRING A PULL TEST FOR RETENTION SHALL BE PERFORMED AS FOLLOWS: A GENTLE PULL ON THE WIRE SHALL BE USED TO DETERMINE IF THE CONTACT IS SEATED PROPERLY.

△8 APPLY TEMPORARY CABLE IDENTIFICATION LABELS P/N TZE-211.
NOTE: TO BE REMOVED AT INSTALLATION INTO FINAL ASSEMBLY.

△9 BEFORE INSTALLING ITEM C7, TEST ASSEMBLY PER ACME-TST-013. DO NOT PLACE IN ESD BAG UNTIL HEAT SHRINK IS INSTALLED.

10. PLACE COMPLETED ASSEMBLY IN CLEAN, STATIC-SHIELDING PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/STATEMENT OF WORK PER SAE AS478, METHOD 35D. STORE IN A PROJECT APPROVED STORAGE AREA.

CRIMP TOOL LIST				
CONTACT P/N	CRIMP TOOL	POSITIONER	I/E TOOL	REF. DES.
50394-8200	63819-0100	N/A	N/A	P200

TENSILE PULL STRENGTH LIST			
MANUFACTURER	CONTACT P/N	WIRE AWG	LBS
MOLEX	50394-8200	24	6.6

REV	DESCRIPTION	APPROVED
A	REVISED PER ACME-ECO-359	MH 9/11/15 DS 9/11/15 TG 9/11/15

REVISION HISTORY

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL; DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E. McCLOSKEY 9/14/15
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	M. HOMKO 7/14/14	QUALITY	D. SEELEY 7/14/14
REVIEWER	J. BRUEWER 7/14/14	MATERIALS	M. WILKINSON 7/14/14
MECHANICAL	A. DRAKE 7/14/14	PROJ LEAD	B. BOROWSKI 7/21/14
ELECTRICAL	T. GOBELI 7/15/14	ENGINEER	M. SAVINA 7/14/14
STRUCTURAL	C. WERNER 7/17/14		
SAFETY	W. BORRELLI 7/14/14		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
EXTERNAL BATTERY ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101EFA3216	A

SCALE NONE | INITIAL REL DATE 07/21/14 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL NAME: S1101EFA3216_REV_A.DWG

AutoCAD 2012

DWG NO S1101EFA3216 | SH 1 | REV A