

COMMERCIAL PARTS LIST


ITEM	QTY	PART NUMBER	DESCRIPTION	MANUFACTURER
C1	1	805-002-16UC8-6PA	CONNECTOR, CIRCULAR, 6 POS.	GLENAIR
C2	1	380MS137UC1101-5	BACKSHELL, STRAIGHT, SIZE 11	GLENAIR
C3	A/R	809-001	CONTACT, PIN, SIZE 23, AWG 22-28	GLENAIR
C4	A/R	M27500-22RC1S06	1/C, 22 AWG, SHLD	QPL
C5	1	321884	TERMINAL RING, #4, 22-16 AWG	AMP
C6	–	–	-DELETED-	–
C7	A/R	222MS	THREADLOCKER	LOCTITE
C8	A/R	7649	PRIMER N	LOCTITE
C9	A/R	2216 B/A GRAY	EPOXY, 2 PART	3M
C10	A/R	THFE4-115009	SHRINK TUBING, EXPANDED PREHEAT ID .115"	SAINT GOBAIN
C11	A/R	THFE4-092009	SHRINK TUBING, EXPANDED PREHEAT ID 0.092"	SAINT GOBAIN

LABEL LIST	
ITEM	INSCRIPTION
L1	P104
L2	S1101EFA1215 SN xxxx



SCHEMATIC

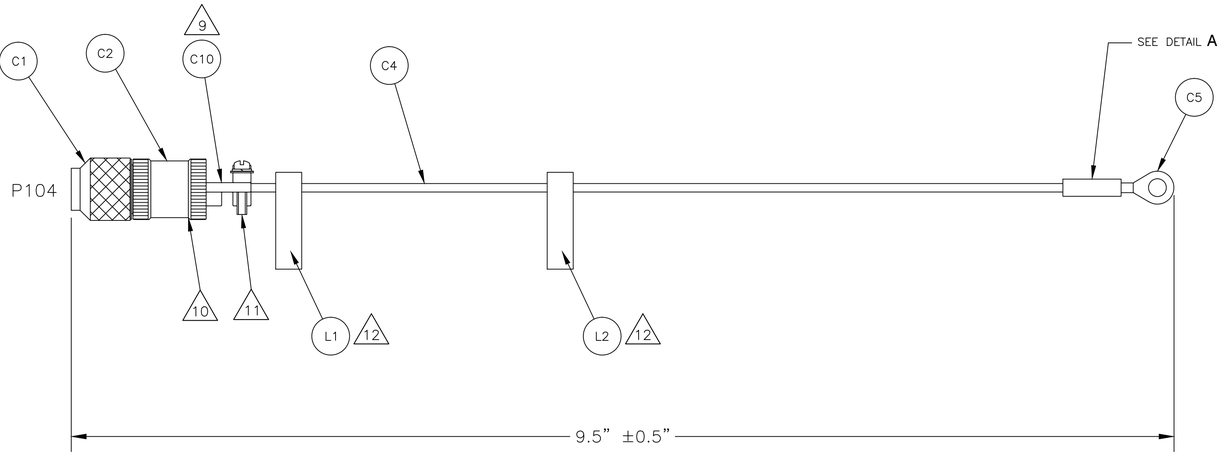

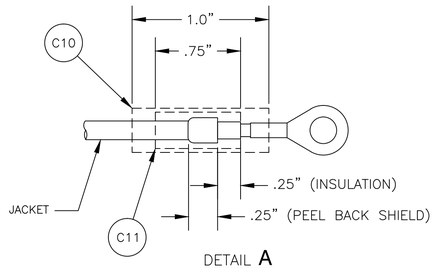

DETAIL A

12 APPLY TEMPORARY CABLE IDENTIFICATION LABELS P/N TZE-211.
NOTE: TO BE REMOVED AT INSTALLATION INTO FINAL ASSEMBLY.

13. TEST PER NASA-STD-8739.4 PARA 18.2.6 USING THE FOLLOWING:
CONTINUITY: < 5 OHMS
DWV: VOLTAGE: 500VAC ±50VAC @60Hz
CURRENT: < 1 MILLIAMP
DURATION: < 1 MINUTE
IR: VOLTAGE: 500 ±50VDC
RESISTANCE: > 100 MEG OHMS
DURATION: < 1 MINUTE

14. PLACE COMPLETED ASSEMBLY IN CLEAN, STATIC-SHIELDING PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/STATEMENT OF WORK PER SAE AS478, METHOD 35D. STORE IN A PROJECT APPROVED STORAGE AREA.

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. HARNESS ASSEMBLY AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.4 AND FOLLOWING NOTES:
   a. ALL SHIELD TERMINATIONS ARE INTERFERENCE SENSITIVE.
5. FOR TENSILE PULLS SEE TENSILE PULL STRENGTH LIST. TENSILE PULL STRENGTHS PER NASA-STD-8739.4 AND/OR THE MANUFACTURER'S SPECIFICATIONS.
6. INSTALL CONTACTS IN ALL UNUSED POSITIONS OF CIRCULAR CONNECTOR.
7. PERFORM CONTACT RETENTION TEST PER NASA-STD-8739.4 AND/OR MANUFACTURER'S SPECIFICATIONS. CONTACTS REQUIRING A PULL TEST FOR RETENTION SHALL BE PERFORMED AS FOLLOWS: A GENTLE PULL ON THE WIRE SHALL BE USED TO DETERMINE IF THE CONTACT IS SEATED PROPERLY.
8. TERMINATE SHIELDS INTO BACKSHELL PER MANUFACTURER'S SPECIFICATION.

9 TO SAFELY SECURE CABLE IN STRAIN RELIEF INCREASE THE CABLE DIAMETER USING HEAT SHRINK TUBING (ITEM C10). MAXIMUM OF TWO (2) LAYERS.

10 TORQUE BACKSHELL (ITEM C2) TO 15-20 IN-LBS. STAKE BACKSHELL USING EPOXY (ITEM C9).

11 TRIM FASTENERS ON STRAIN RELIEF TO EXPOSE 1-2 THREADS. APPLY PRIMER N (ITEM C8) AND THREADLOCKER 222MS (ITEM C7), TORQUE FASTENERS PER CHART. APPLY EPOXY (ITEM C9) TO EXPOSED THREADS.

CRIMP TOOL LIST			
CONTACT P/N	CRIMP TOOL	POSITIONER	I/E TOOL
809-001	M22520/2-01	K1461	809-088
321884	TR-490 OR EQUIV.	N/A	N/A

TENSILE PULL STRENGTH LIST			
MANUFACTURER	CONTACT P/N	WIRE AWG	LBS
GLENAIR	809-001	22	12
AMP	321884	22	15

BACKSHELL CLAMPING TORQUE TABLE		
SCREW SIZE	TORQUE RANGE	UNITS
2-56	2 ±0.5	IN-LB
4-40	4 ±0.5	IN-LB
6-32	6 ±1.0	IN-LB
8-32	8 ±1.0	IN-LB
10-32	10 ±1.0	IN-LB
.250-20	12 ±1.0	IN-LB

REVISION HISTORY		
REV	DESCRIPTION	APPROVED
B	REVISED PER ACME-ECO-423.	MH 4/13/15 TG 4/13/15 DS 4/14/15
A	REVISED PER ACME-ECO-313.	MH 12/15/14 TG 12/16/14 RP 1/5/15

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL; DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: E. McCLOSKEY 4/14/15
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	M. HOMKO 4/18/14	QUALITY	D. SEELEY 4/23/14
REVIEWER	J. BRUEWER 4/22/14	MATERIALS	M. WILKINSON 4/18/14
MECHANICAL	A. DRAKE 4/18/14	PROJ LEAD	B. BOROWSKI 4/23/14
ELECTRICAL	T. GOBELI 4/18/14	ENGINEER	M. SAVINA 4/18/14
STRUCTURAL	C. WERNER 4/18/14		
SAFETY	W. BORRELLI 4/18/14		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
BURNER HARNESS ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101EFA1215	B

SCALE NONE | INITIAL REL DATE 04/23/14 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL NAME: S1101EFA1215_REV_B.DWG

AutoCAD 2012

DWG NO S1101EFA1215 | SH 1 | REV B