


NOTES:


1. MATERIAL: ULTEM 9085.
2. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
3. THIS PART SHALL BE MANUFACTURED BY RAPID PROTO-TYPING USING S1101MFD1269.STL FILE DATED 10/29/2015 10:35 AM.
4. CLEAN ALL SURFACES WITH ISOPROPYL OR ETHYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
5. HANDLE WITH CLEAN, LINT-FREE GLOVES.
6. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.




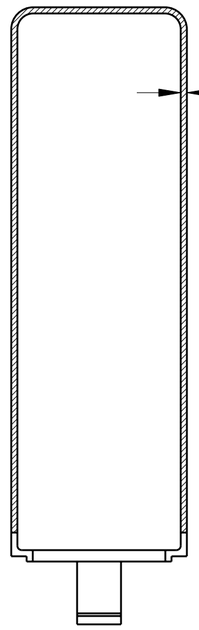

SECTION **A-A**

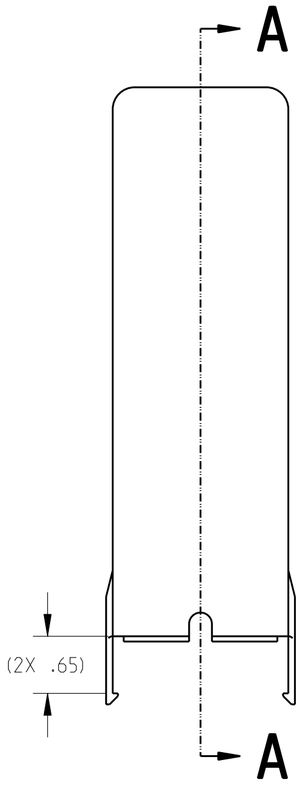

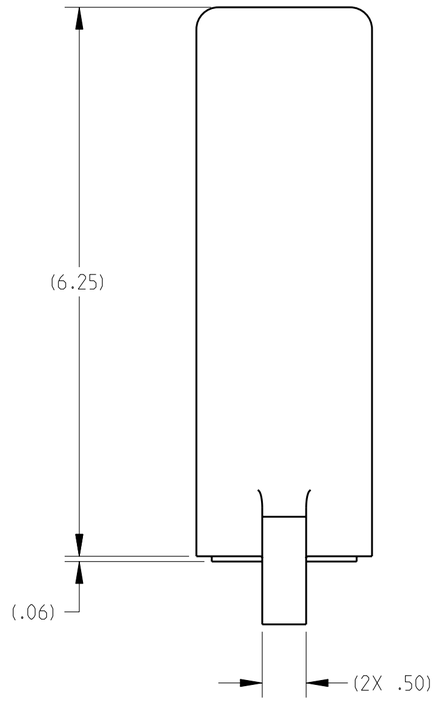



REV	DESCRIPTION	APPROVED
1	INITIAL REPOSITORY RELEASE.	J.OGRIN 11/17/15 A.DRAKE 11/17/15 M.AYNIK 11/18/15 B.BOROWSKI 11/18/15

REVISION HISTORY

S1101MFA1211
S1101MFA1207
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

S1101MFA1225
S1101MFA1220
S1101MFA1216
NEXT ASSEMBLY (CONT.)

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: _____

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER		QUALITY	
REVIEWER		MATERIALS	
MECHANICAL		PROJ LEAD	
ELECTRICAL			
STRUCTURAL			
SAFETY			

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE

BURNER STEM COVER

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101MFD1269	1

SCALE 3/4 | INITIAL REL DATE | SHEET 1 OF 1

RELEASE LEVEL: WORKING
MODEL: S1101MFD1269

PRO/E VERSION: Creo 2.0

REV 1 | SH 1 | DWG NO S1101MFD1269

ZIN_C_2012.frm