


COMMERCIAL PARTS LIST


ITEM	QTY	PART NUMBER	DESCRIPTION	MANUFACTURER
1	1	ATX104HR-EXPRESS	PCI-104-EXPRESS POWER SUPPLY MODULE	RTD E.T.
2	A/R	TZE-211	1/4" LABEL, BLK LETTERS, WHT BACKGROUND	BROTHER
3	A/R	PR-1204	PRIMER	DOW CORNING
4	A/R	3140 RTV	RTV COATING	DOW CORNING
5	A/R	3145 RTV	RTV ADHESIVE SEALANT, GRAY	DOW CORNING



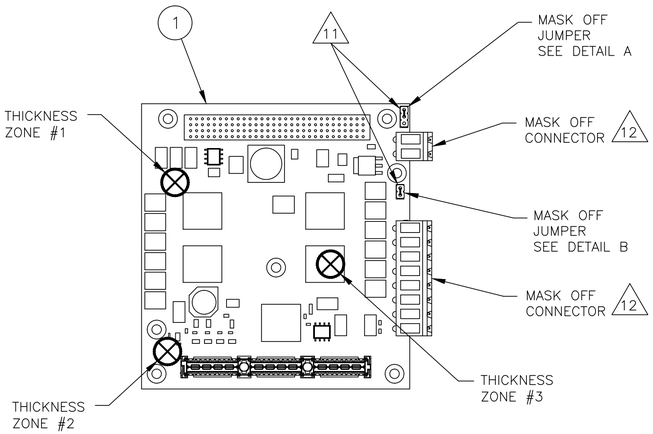

PRIMARY SIDE



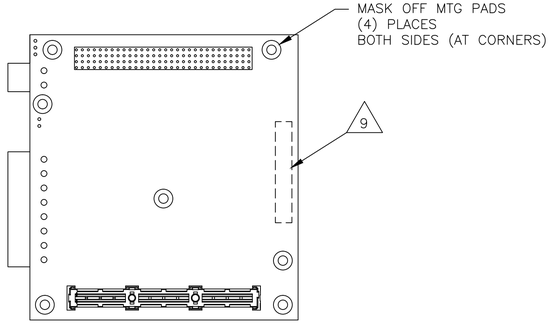

SECONDARY SIDE

NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. BOARD MODIFICATIONS TO BE PERFORMED IN ACCORDANCE WITH NASA-STD-8739 AND ZIN QUALITY MANUAL WORK INSTRUCTION W09002.
3. ESD HANDLING AND CONTROL PER ZIN QUALITY WORK MANUAL INSTRUCTIONS W09007.
4. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
5. PRIMARY SIDE OF BOARD SHOWN (UNLESS OTHERWISE INDICATED).
6. INSPECTION OF ASSEMBLIED PCB SHALL BE PER IPC-A-610 CLASS 2.
7. USING APPROVED CLEANING PROCESSES AND PROCEDURES CLEAN PCB.
8. PERFORM CLEANLINESS TEST AND RECORD IN ZIN QUALITY FORM F15011.
9. USING ITEM 2 ON SECONDARY SIDE OF BOARD, MARK ASSEMBLY AND SERIAL NUMBERS IN INDICATED AREA.
10. INSTALL JUMPERS IF NOT PRESENT.
11. STAKE COMPONENTS WITH ITEM 5, RTV ADHESIVE SEALANT PRIOR TO CONFORMAL COATING.
12. REMOVE AND DISCARD PLUG IN SCREW TERMINAL CONNECTOR.
13. ENGINEER OR TECHNICIAN SHALL FUNCTIONALL TEST THE ASSEMBLY PRIOR TO CONFORMAL COATING PER TEST PLAN ACME-TST-032.
14. BAKE OUT PCB FOR CONFORMAL COATING PER NASA-STD-8739.1. BAKE OUT AT 66°C ±5°C FOR SIX HOURS AND RECORD IN ZIN QUALITY FORM F09003.
15. USING KAPTON TAPE, MASK JUMPER POSTS, CONNECTORS, AND CONDUCTORS AS INDICATED ON THE ASSEMBLY DRAWING.
16. USING ITEM 3, APPLY PRIMER TO THE PCB PER NASA-STD-8739.1 AND ZIN QUALITY FORM F09008.
17. USING ITEM 4, CONFORMAL COAT THE PCB PER NASA-STD-8739.1. MEASURE COATING THICKNESS AT ALL THICKNESS ZONES RECORDING RESULTS IN ZIN QUALITY FORM F09008.
18. INSPECT CONFORMAL COATING AND STAKING PROCESS PER NASA-STD-8739.1.
19. ENGINEER OR TECHNICIAN SHALL FUNCTIONALL TEST THE ASSEMBLY FOLLOWING CONFORMAL COATING PER TEST PLAN ACME-TST-032.
20. PLACE COMPLETED ASSEMBLY IN A CLEAN STATIC-SHIELDING PACKAGING. MARK BAG WITH ASSEMBLY NAME, NUMBER, AND SERIAL NUMBER. STORE IN AN APPROVED STORAGE AREA.

ACME-ECO-460 In Process

REV	DESCRIPTION	APPROVED
A	REVISED PER ACME-ECO-402.	MH 2/18/15 DS 2/18/15 TG 2/18/15

REVISION HISTORY

DWG NO S1101EFA2129 | SH 1 | REV A

S1101MFA2100
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: E. McCLOSKEY 2/18/15
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	M. HOMKO 3/24/14	QUALITY	D. SEELEY 4/1/14
REVIEWER	R. PFEIFFER 3/24/14	MATERIALS	M. WILKINSON 3/24/14
MECHANICAL	A. DRAKE 3/31/14	PROJ LEAD	B. BOROWSKI 4/2/14
ELECTRICAL	T. GOBELI 3/24/14	ENGINEER	M. SAVINA 3/24/14
STRUCTURAL	C. WERNER 3/25/14		
SAFETY	W. BORRELLI 3/24/14		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
MODIFIED CAMERA POWER BOARD

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101EFA2129	A

SCALE	NONE	INITIAL REL DATE	04/02/14	SHEET	1	OF	1

RELEASE LEVEL: RELEASED
MODEL NAME: S1101EFA2129_rev_A.DWG

AutoCAD 2012