


COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION	MANUFACTURER
1	1	PR8258420CP2.4IOAD8.R	PRODIGY PC/104 MOTION CARD	PMD, INC.
2	A/R	TZE-211	1/4" LABEL, BLK LETTERS, WHT BACKGROUND	BROTHER
3	A/R	PR-1204	PRIMER	DOW CORNING
4	A/R	3140 RTV	RTV COATING	DOW CORNING
5	A/R	3145 RTV	RTV ADHESIVE SEALANT, GRAY	DOW CORNING

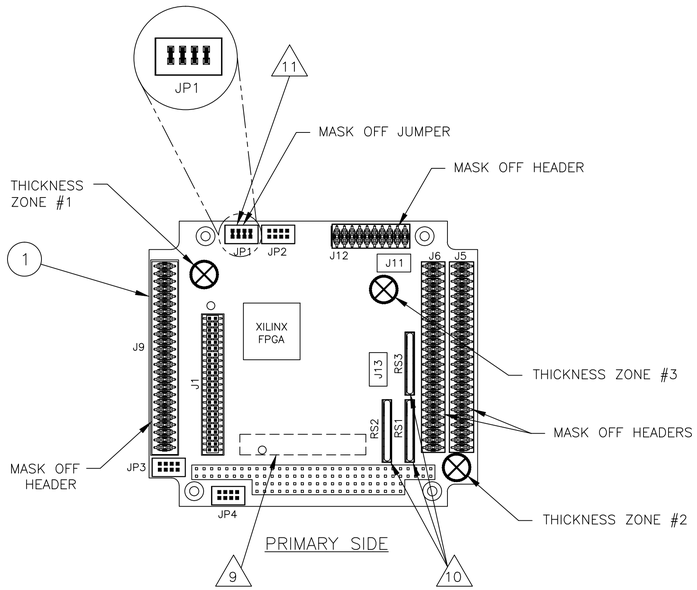

PRIMARY SIDE



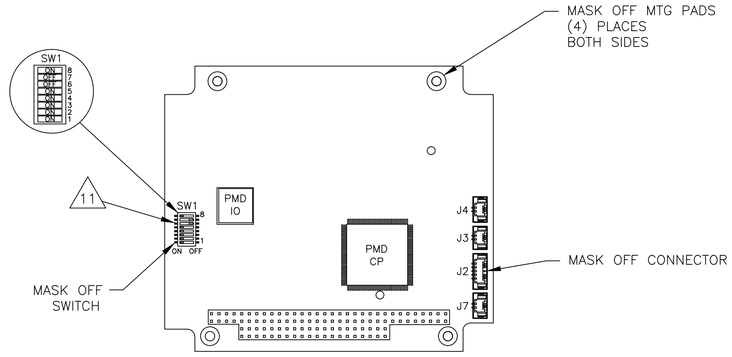

SECONDARY SIDE

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. BOARD MODIFICATIONS TO BE PERFORMED IN ACCORDANCE WITH NASA-STD-8739 AND ZIN QUALITY MANUAL WORK INSTRUCTION W09002.
3. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
4. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
5. PRIMARY SIDE OF BOARD SHOWN (UNLESS OTHERWISE INDICATED).
6. INSPECTION OF ASSEMBLIED PCB SHALL BE PER IPC-A-610 CLASS 2.
7. USING APPROVED CLEANING PROCESSES AND PROCEDURES CLEAN PCB.
8. PERFORM CLEANLINESS TEST AND RECORD IN ZIN QUALITY FORM F15011.
9. USING ITEM 2 ON PRIMARY SIDE OF BOARD, MARK ASSEMBLY AND SERIAL NUMBERS IN INDICATED AREA.
10. REMOVE AND DISCARD COMPONENTS RS1, RS2, AND RS3.
11. STAKE COMPONENTS WITH ITEM 5, RTV ADHESIVE SEALANT PRIOR TO CONFORMAL COATING.
12. BAKE OUT PCB FOR CONFORMAL COATING PER NASA-STD-8739.1. BAKE OUT AT 66°C ±5°C FOR SIX HOURS AND RECORD IN ZIN QUALITY FORM F09003.
13. USING KAPTON TAPE, MASK JUMPER POSTS, CONNECTORS, AND CONDUCTORS AS INDICATED ON THE ASSEMBLY DRAWING.
14. USING ITEM 3, APPLY PRIMER TO THE PCB PER NASA-STD-8739.1 AND ZIN QUALITY FORM F09008.
15. USING ITEM 4, CONFORMAL COAT THE PCB PER NASA-STD-8739.1. MEASURE COATING THICKNESS AT ALL THICKNESS ZONES RECORDING RESULTS IN ZIN QUALITY FORM F09008.
16. INSPECT CONFORMAL COATING AND STAKING PROCESS PER NASA-STD-8739.1.
17. PLACE COMPLETED ASSEMBLY IN A CLEAN STATIC-SHIELDING PACKAGING. MARK BAG WITH ASSEMBLY NAME, NUMBER, AND SERIAL NUMBER. STORE IN AN APPROVED STORAGE AREA.
18. TRIM HEADER PINS TO HEIGHT < 0.16"

REV	DESCRIPTION	APPROVED
A	REVISED PER ACME-ECO-349.	MH 2/18/15 DS 2/18/15 MA 2/18/15

REVISION HISTORY

DWG NO S1101EFA2130 | SH 1 | REV A

S1101MFA2100
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E. McCLOSKEY 2/18/15

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	M. HOMKO 6/24/14	QUALITY	D. SEELEY 6/26/14
REVIEWER	R. PFEIFFER 6/24/14	MATERIALS	M. WILKINSON 6/24/14
MECHANICAL	A. DRAKE 6/24/14	PROJ LEAD	B. BOROWSKI 6/27/14
ELECTRICAL	T. GOBELI 6/24/14		
STRUCTURAL	C. WERNER 6/24/14		
SAFETY	W. BORRELLI 6/24/14		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
MODIFIED CAMERA MOTION CONTROL BOARD

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101EFA2130	A

SCALE NONE | INITIAL REL DATE 06/30/14 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL NAME: S1101EFA2130_REV_A.DWG

AutoCAD 2012