



DRAWING LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	S1101EFA1512	PMT HARNESS ASSEMBLY
2	1	S1101MFA1501	PMT BRACKET ASSEMBLY
3	1	S1101MFA1504	PMT FILTER HOUSING ASSEMBLY 1
4	1	S1101MFA1505	PMT FILTER HOUSING ASSEMBLY 2
5	1	S1101MFA1506	PMT FILTER HOUSING ASSEMBLY 3
6	1	S1101MFD1503	PMT BRACKET CLAMP
7	3	S1101MFD1511	PMT FILTER GASKET
8	6	S1101MFD1514	PMT BRACKET PAD
9	1	S1101MFT1500-XXX	COMBO LABEL
10	1	S1101MFT1500-01	CABLE LABEL

COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	12	NA0069-A020014	SOCKET HEAD CAP SCREW, METRIC A286 CRES, M12 X 0.4, 14 MM LONG
C2	6	ACME_NAS1101E02-5	SCREW, MACHINE-FLAT FILLISTER HEAD .086-56 UNJC-3A X .312 LENGTH
C3	18	NAS620C2	#2 FLAT WASHER REDUCED OUTER DIAMETER
C4	2	NAS620C4L	#4 REDUCED THICKNESS FLAT WASHER REDUCED O.D.
C5	2	NAS1352N04-6	#4-40(.112) UNRC-3A X .375 SOCKET HEAD CAP SCREW
C6	A/R	222MS	THREADLOCKER, LOCTITE
C7	1	SDG32104805-009	DECAL, ELECTROSTATIC SYMBOL .5 IN X .5 IN, METAL PHOTO AND ADHESIVE (USC)
C8	1	667-261-M-N11	PROTECTIVE COVER, PLUG, SHELL SIZE 11 (GLENAIR)

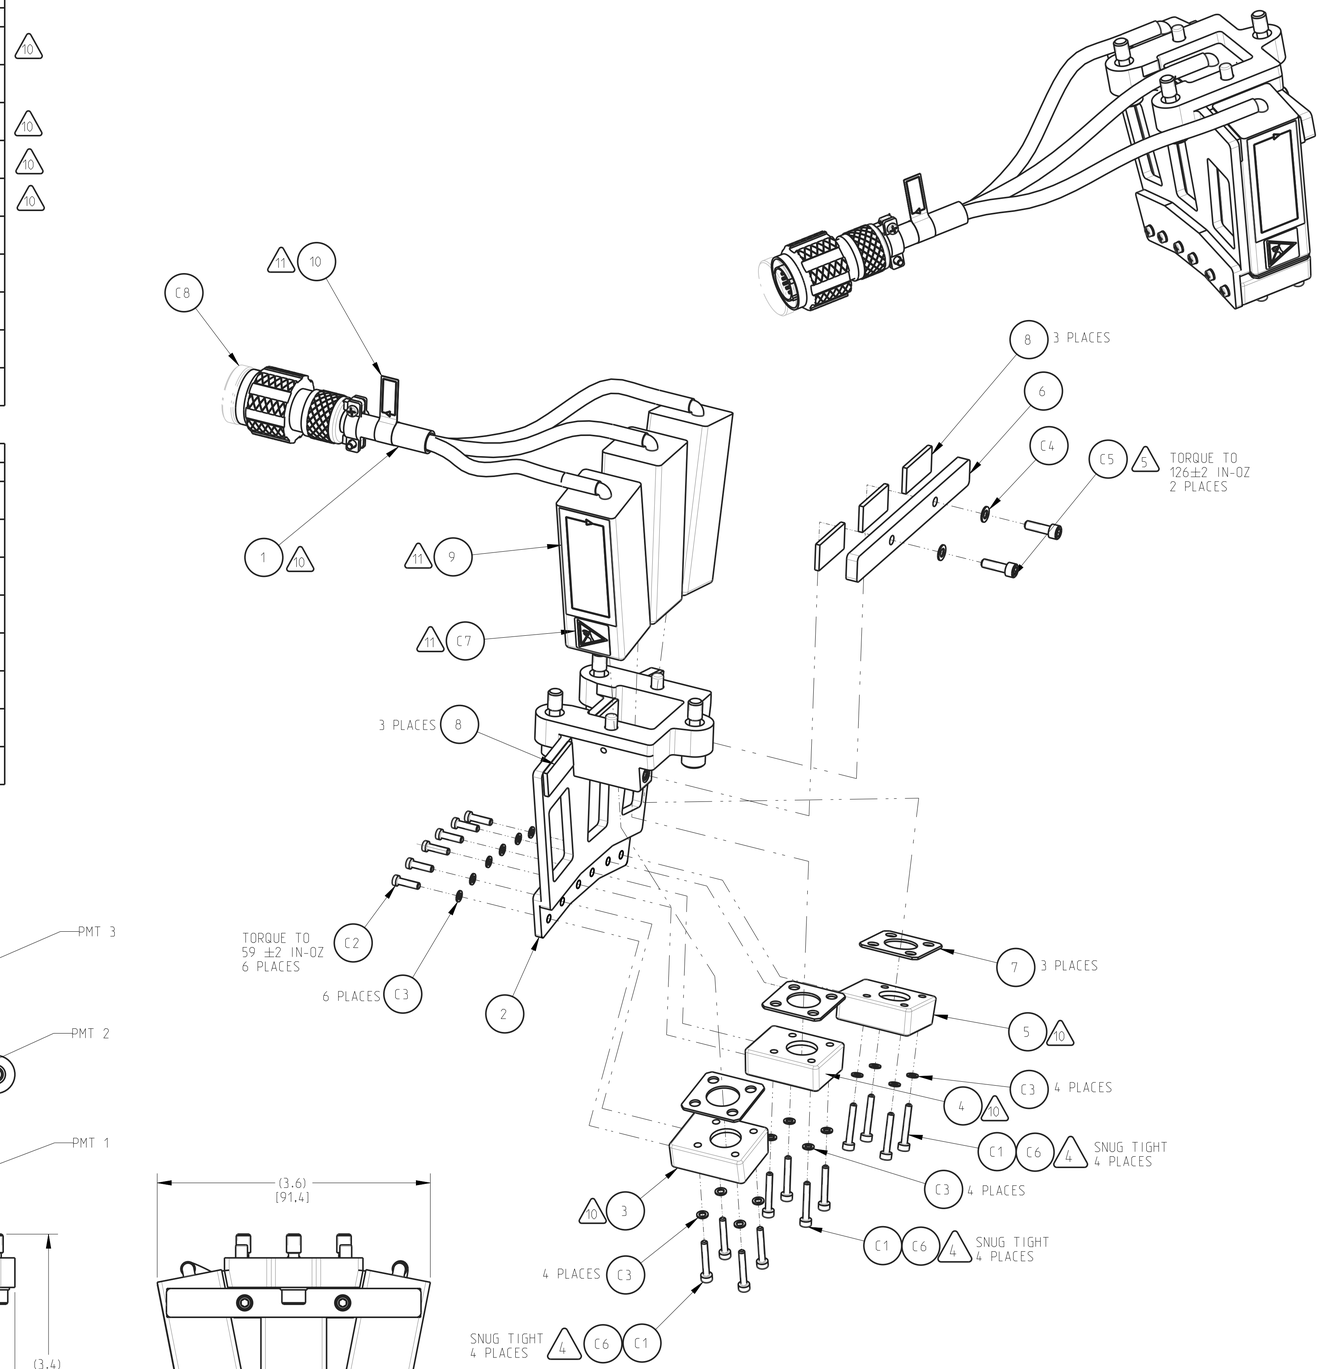

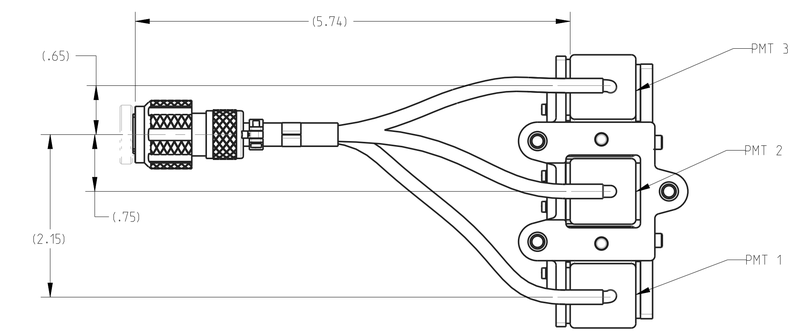

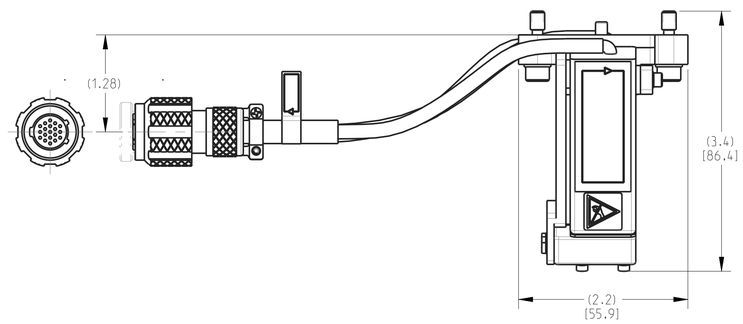



NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. REFER TO S1101EFA1512 FOR WIRING INTERCONNECT.
4. APPLY THREAD LOCKING COMPOUND PER ESTABLISHED PROCEDURES.
5. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING.
6. CHROMATE CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
7. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
8. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
9. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW PER SAE-AS478, METHOD 35D.
10. HANDLE AND CLEAN OPTICAL COMPONENTS, AS NECESSARY, PER ESTABLISHED PROCEDURES.
11. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.

REV	DESCRIPTION	APPROVED
B	INCORPORATED ACME-ECO-537.	LF 11/10/16 AK 11/10/16 AD 11/14/16
A	INCORPORATED ACME-ECO-205.	MA 09/04/13 KR 09/05/13 AD 09/04/13

REVISION HISTORY

S1101MFA0100

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL. DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E.McCLOSKEY 11/14/16

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	K.RHODES 10/22/12	QUALITY	D.SEELEY 10/26/12
REVIEWER	M.PREVITE 10/22/12	MATERIALS	M.WILKINSON 10/23/12
MECHANICAL	A.DRAKE 10/22/12	PROJ LEAD	B.BOROWSKI 10/29/12
ELECTRICAL	T.GOBELI 10/23/12		
STRUCTURAL	C.WERNER 10/29/12		
SAFETY	W.BORRELLI 10/26/12		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
8745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE

PMT ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1500	B

SCALE 1/1 | INITIAL REL DATE 10/29/12 | SHEET 1 OF 1

RELEASE LEVEL: WORKING
MODEL: S1101MFA1500

PRO/E VERSION: Wildfire 2.0

DWG NO S1101MFA1500 | SH 1 | REV B

ZIN_D_2012.frm