


DRAWING LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	S1101MFD1528	60 DEGREE RADIOMETER HOUSING
2	1	S1101EFA1527	60 DEGREE RADIOMETER BOARD ASSEMBLY

COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	2	S283-M13-F16-C	SPACER, .089 ID X .188 OD X .094 LG. PHENOLIC, UNICORP
C2	2	NAS620C2	#2 FLAT WASHER REDUCED OUTER DIAMETER
C3	2	NAS1101E02-6	SCREW, MACHINE-FLAT FILLISTER HEAD .086-56 UNJC-3A X .375 LENGTH
C4	2	NAS1291C02M	NUT, .086-56 UNJC-3B, SELF LOCKING, A286
C5	2	93493A228	#2 FLAT WASHER, INSULATING, FIBERGLASS, McMASTER-CARR

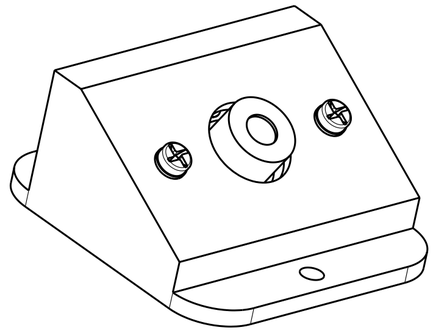

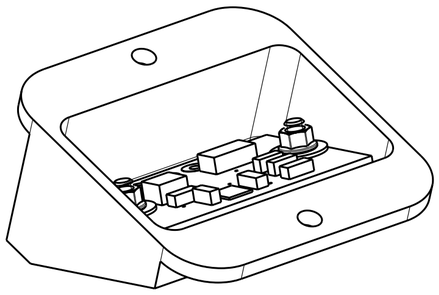

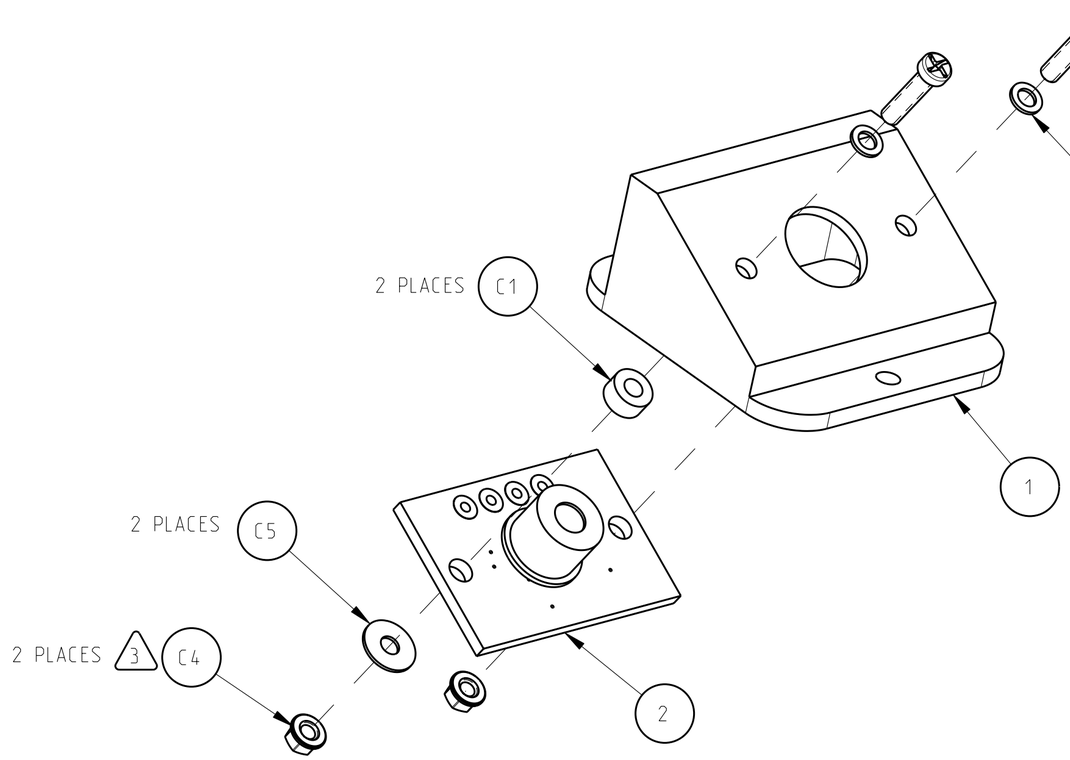

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING OR ASSEMBLY PROCEDURE.
4. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
5. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
6. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
7. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

REV	DESCRIPTION	APPROVED
A	INCORPORATED ACME-ECO-306	KR 4/10/14 GF 4/10/14 AD 4/14/14

REVISION HISTORY

DWG NO S1101MFA1526 REV A SH 1

S1101EFA0300

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: *E.McCLOSKEY 4/15/14*

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	K.RHODES 4/9/13	QUALITY	D.SEELEY 4/11/13
REVIEWER	M.AYNIK 4/15/13	MATERIALS	M.WILKINSON 4/10/13
MECHANICAL	A.DRAKE 4/15/13	PROJ LEAD	B.BOROWSKI 4/16/13
ELECTRICAL	T.GOBELI 4/10/13		
STRUCTURAL	C.WERNER 4/15/13		
SAFETY	W.BORRELLI 4/9/13		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE

60 DEGREE RADIOMETER ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101MFA1526	A

SCALE 2/1 | INITIAL REL DATE 4/16/13 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL: S1101MFA1526

PRO/E VERSION: Wildfire 2.0

ZIN_C_2012.frm