
DRAWING LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	S1101MFA1551	BRE RADIOMETER HOUSING ASSEMBLY
2	3	S110EFA1553	BRE RADIOMETER BOARD ASSEMBLY
3	1	S1101MFD1555	BRE RADIOMETER COVER
4	1	S1101MFD1556	BRE RADIOMETER SHIELD
5	1	S1101EFA1554	BRE RADIOMETER HARNESS ASSEMBLY
6	1	S1101MFT1550-XX	COMBO LABEL
7	1	S1101MFT1550-03	NAME LABEL
8	1	S1101MFT1550-04	CONNECTOR LABEL


COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	6	S283-M07-F09-C	SPACER, .089 ID X .188 OD X .094 LG. SS, PASSIVATED, UNICORP
C2	10	NAS620C2	#2 FLAT WASHER REDUCED OUTER DIAMETER
C3	6	NAS1352N02-6	#2-56(.086) UNRC-3A X .375 SOCKET HEAD CAP SCREW
C4	5	NAS1352N02-8	#2-56(.086) UNRC-3A X .500 SOCKET HEAD CAP SCREW
C5	1	NAS1149EN232R	NO. 2 FLAT WASHER .099" ID X .250" OD X .032" THK
C6	A/R	PLT1M-M702Y	CABLE TIE, HALAR FLUOROPOLYMER, PANDUIT CORP.
C7	A/R	SN63PB37/RMA	SOLDER, TIN/LEAD, RMA FLUX
C8	A/R	M22759/11-22-0	22 AWG WIRE, SILVER COATED STRANDED COPPER, FLUOROPOLYMER INSULATED, EXTRUDED TFE, BLACK
C9	A/R	M22759/11-22-2	22 AWG WIRE, SILVER COATED STRANDED COPPER, FLUOROPOLYMER INSULATED, EXTRUDED TFE, RED
C10	A/R	3145 CLEAR	RTV ADHESIVE/SEALANT CLEAR (DOW CORNING)
C11	1	SDG32104805-009	DECAL, ELECTROSTATIC SYMBOL .5 IN X .5 IN, METAL PHOTO AND ADHESIVE (JSC)
C12	1	4272-15S	CONNECTOR COVER, D-TYPE (SCS)

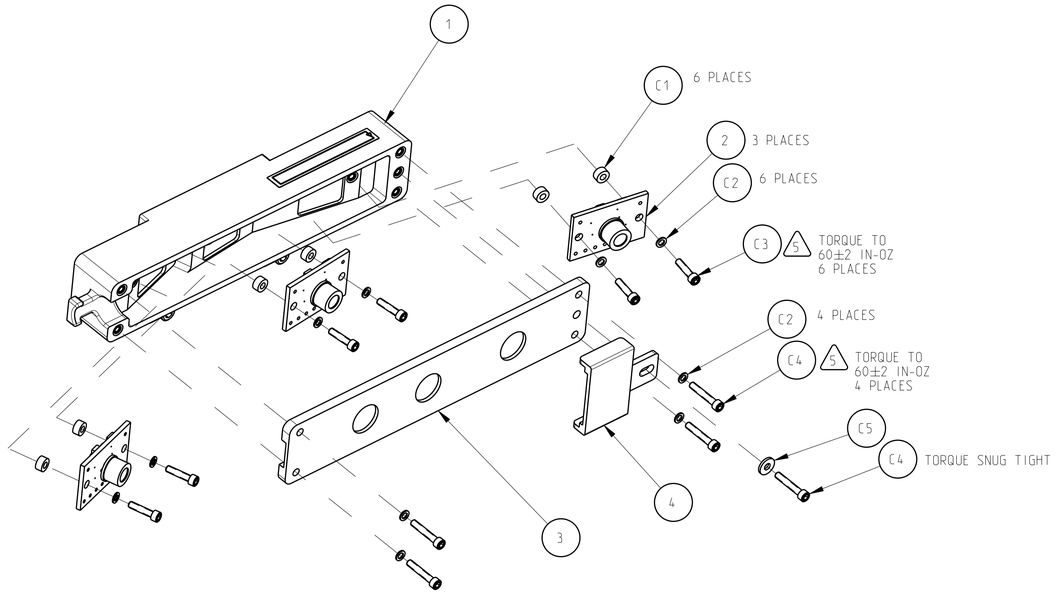


MECHANICAL ASSEMBLY
NOTE: SOME ITEMS REMOVED FOR CLARITY

NOTES:


1. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ASSEMBLE PER APPROVED PROCESS PLAN FOR INITIAL BUILD.
3. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
4. ASSEMBLY AND SOLDERING SHALL BE IN ACCORDANCE WITH NASA-STD-8739.3.
5. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING OR ASSEMBLY PROCEDURE.
6. REFERENCE CONNECTION DIAGRAM ON HARNESS ASSEMBLY DRAWING S1101EFA1554
7. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
8. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
9. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
10. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
11. STAKE WIRE FOR STRAIN RELIEF AND COVER ALL SOLDER CONNECTIONS WITH RTV (ITEM C10). STAKING, BONDING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1
12. TEST ASSEMBLY PER ACME-TST-022.
13. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.



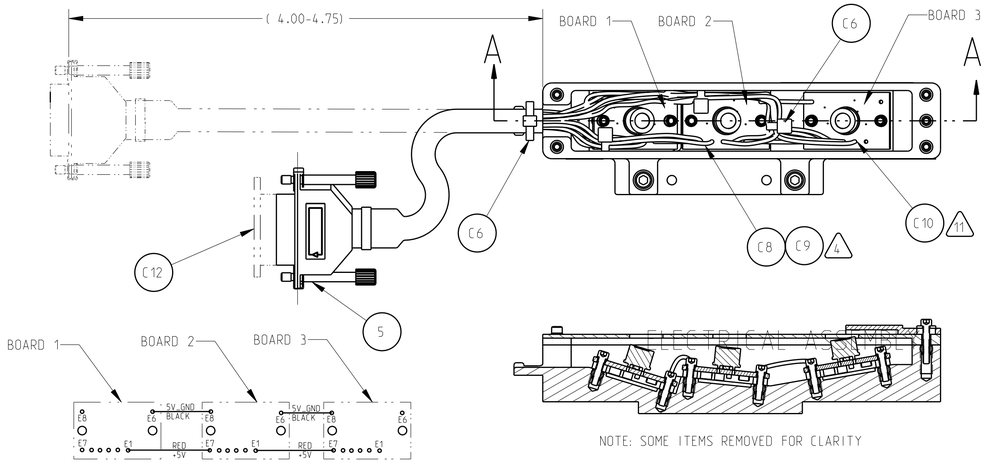

JUMPER WIRING DIAGRAM

SECTION A-A
NOTE: SOME ITEMS REMOVED FOR CLARITY

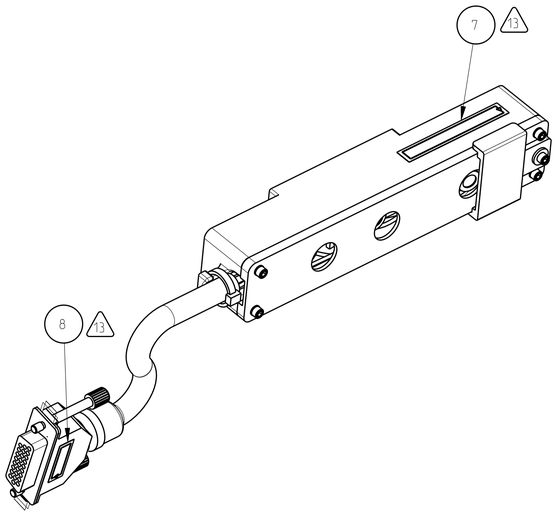

REV	DESCRIPTION	APPROVED
B	INCORPOATED ACME-ECO-524 AND ACME-ECO-594	JO 5/10/16 AD 5/10/16 AR 5/13/16
A	INCORPORATED ACME-ECO-414.	KR 02/05/15 AD 02/06/15 GF 02/06/15

REVISION HISTORY

S1101MFA0100	THIS DRAWING IS UNDER CONFIGURATION CONTROL. DO NOT REVISE WITHOUT AN APPROVED ECO.	ZIN TECHNOLOGIES 6745 ENGLE ROAD AIRPORT EXECUTIVE PARK CLEVELAND, OHIO 44130 (440) 625-2200 www.zin-tech.com	NATIONAL AERONAUTICS AND SPACE ADMINISTRATION JOHN H. GLENN RESEARCH CENTER LEWIS FIELD CLEVELAND, OHIO
NEXT ASSEMBLY	APPROVED: _____ PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.		
UNLESS OTHERWISE SPECIFIED: 1. ALL DIMENSIONS ARE IN INCHES 2. BREAK EDGES .010-.020 3. INSIDE CORNERS R.02 MAX 4. LINEAR TOLERANCES: .X ± .03 .XX ± .01 .XXX ± .005 5. ANGULAR TOLERANCE ± .5°	DESIGNER K.RHODES 2/27/14 REVIEWER G.FEDEVICH 2/27/14 MECHANICAL A.DRAKE 3/3/14 ELECTRICAL T.GOBELI 2/27/14 STRUCTURAL C.WERNER 3/6/14 SAFETY M.BORRELLI 2/27/14	QUALITY D.SEELEY 2/27/14 MATERIALS M.WILKINSON 2/27/14 PROJ LEAD B.BORDWSKI 3/10/14	TITLE BRE RADIOMETER ASSEMBLY
THIRD ANGLE PROJECTION	DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994	CONTRACT NUMBER: NNC14CA02C PROJECT CODE: S2-BT3	SIZE D · CAGE CODE 0SG68 · DWG NO S1101MFA1550 · REV B SCALE 1/1 · INITIAL REL DATE 3/11/14 · SHEET 1 OF 1
			RELEASE LEVEL: RELEASED MODEL: S1101MFA1550 · PRO/E VERSION: Wildfire 5.0

DWG NO S1101MFA1550 · SH 1 · REV B

ZIN_D_2012.frm