

COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	A/R	50-700R w20/A	BLACK EPOXY INK WITH BASIC CATALYST (ENTHONE)
C2	1	10A12-P4-Y6-C	SINGLE OUTPUT HIGH VOLTAGE MODULE. 12VDC INPUT. 10.000VDC POSITIVE OUTPUT. 4 WATTS (ULTRAVOLT)
C3	A/R	222MS	THREADLOCKER (LOCTITE)

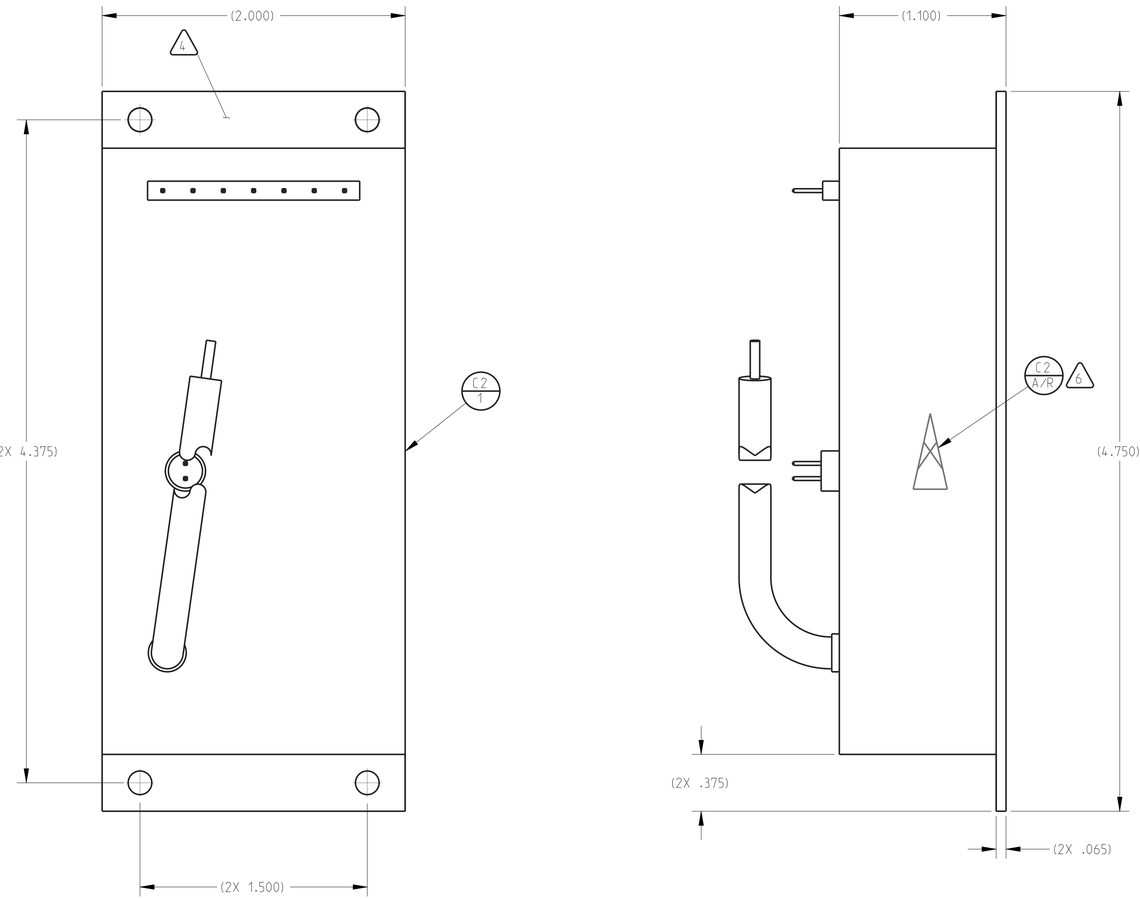

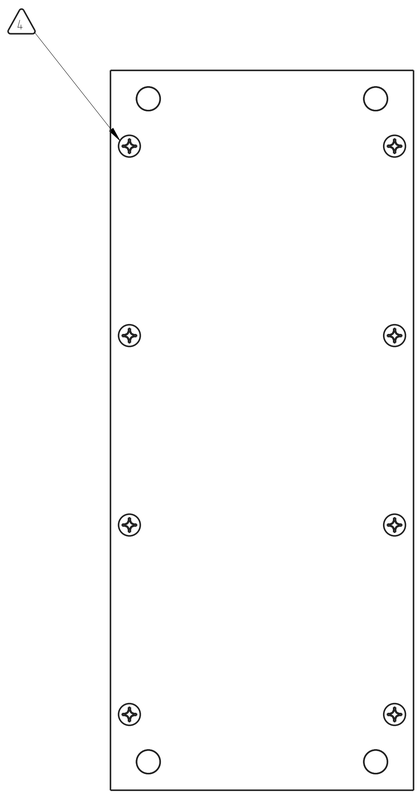

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. 125 µIN Ra ALL MACHINED SURFACES PER ANSI/ASME B46.1 UNLESS OTHERWISE SPECIFIED.
4. MODIFY ITEM C1 MODULE AS FOLLOWS:
   A. UNINSTALL MOUNTING PLATE BY REMOVING THE 8 FACTORY SUPPLIED FASTENERS.
   B. REMOVE FACTORY APPLIED ANODIC COATING FROM MOUNTING PLATE. BLAST ALL SURFACES TO UNIFORM FINISH. MATERIAL: STARBLAST
   C. CHEMICAL CONVERSION COAT MODIFIED SURFACES PER DRAWING NOTE 5.
   D. REINSTALL MOUNTING PLATE USING THE 8 FACTORY SUPPLIED FASTENERS. APPLY THREAD LOCKING COMPOUND C3 PER ESTABLISHED PROCEDURES.
   E. TIGHTEN FASTENERS SHUG TIGHT PER ESTABLISHED PROCEDURES.
5. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
6. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW. IN LOCATION SHOWN. BY INKING PER SAE-AS478-30.
7. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
8. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
9. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

REV	DESCRIPTION	APPROVED
A	INCORPORATE ACME-ECO-573.	LF 11/16/16 AK 11/16/16 AD 11/21/16

REVISION HISTORY

S1101MFA1733
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: *E.McCLOSKEY 11/21/2016*
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	J.OGRIN 01/08/16	QUALITY	L.WRIGHT 01/11/16
REVIEWER	G.FEDEVICH 01/11/16	MATERIALS	M.WILKINSON 01/11/16
MECHANICAL	A.DRAKE 01/11/16	PROJ LEAD	B.BOROWSKI 01/13/16
ELECTRICAL	T.GOBELI 01/11/16		
STRUCTURAL	C.WERNER 01/11/16		
SAFETY	M.BORRELLI 01/11/16		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
8745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
MODIFIED 10KV POSITIVE SUPPLY MODULE

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFP1735	A

SCALE 2/1 | INITIAL REL DATE 01/14/2016 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL: S1101MFP1735

PRO/E VERSION: Creo 2.0

DWG NO S1101MFP1735 | SH 1 | REV A

ZIN_D_2012.frm