COMMERCIAL PARTS LIST


ITEM	QTY	PART NUMBER	DESCRIPTION
C1	1	700276-0036	HIGH VOLTAGE CABLE ASSEMBLY, 36 IN. (TELEDYNE REYNOLDS)
C2	2	NAS1149E0332R	NO. 10 FLAT WASHER .203" ID X .438" OD X .032" THK
C3	4	NAS1149EN216R	NO. 2 FLAT WASHER .099" ID X .250" OD X .016" THK
C4	4	NAS1352N02-6	#2-56(.086) UNRC-3A X .375 SOCKET HEAD CAP SCREW
C5	A/R	3145 CLEAR	RTV ADHESIVE/SEALANT, CLEAR, DOW CORNING
C6	A/R	ELECTROTEMP NO. 8	HIGH TEMPERATURE CERAMIC CEMENT, SAUEREISEN
C7	A/R	SN63PB37/RMA	SOLDER, TIN/LEAD, RMA FLUX
C8	A/R	WPS5662	SILVER BRAZING WIRE, .062 OD, 56% SILVER, 22% COPPER, 17% ZINC, 5% TIN, SRA SOLDERING PRODUCTS
C9	A/R	TRA-CAST 3145	ELECTRICALLY INSULATING EPOXY ADHESIVE, TRA-CON INC.
C10	A/R	MFP-1/4-CLEAR-10-10PC	SHRINK TUBE, 1/4" DIA (3M)
C11	A/R	1181	COPPER TAPE, 1/2" (3M)
C12	A/R	MFP-3/16-CLEAR-10-10PC	SHRINK TUBE, 3/16" DIA (3M)
C13	A/R	FMC-EXPHR222-003-32	EXPANDABLE SLEEVING 1/8"
C14	1	4744-S	BITRAN SARANEX SERIES S BAG, 9 IN. X 12 IN.
C15	1	SDG32112207-001	ZIPLOCK STOWAGE LABEL

DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	SI101MFA1705	E-FIELD MESH BOTTOM CLAMP ASSEMBLY
2	1	SI101MFD1701	E-FIELD MESH SUPPORT RING
3	1	SI101MFD1702	E-FIELD MESH SCREEN
4	1	SI101MFD1703	E-FIELD MESH STEM
5	1	SI101MFD1704	E-FIELD MESH INSULATOR
6	1	SI101MFD1707	E-FIELD MESH TOP CLAMP
7	2	SI101MFP1025	MODIFIED SOCKET HEAD CAP SCREW, .190-32 UNRF-3A X .750
8	1	SI101MFT1700-01	NAME LABEL
9	1	SI101MFT1700-02	P/N LABEL
10	1	SI101MFT1700-0X	S/N LABEL
11	1	SI101MFT1700-07	CONNECTOR LABEL
12	1	SI101MFT1700-XX	BAG CONTENTS LABEL
13	1	SI101MFT1700-XXX	IMS LABEL
14	1	SI101MFT1700-XXXX	BAG IMS LABEL
15	1	SI101MFD1731	E-FIELD MESH LOWER FOAM
16	1	SI101MFD1736	E-FIELD MESH UPPER FOAM

NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ASSEMBLE ITEM 3 (SCREEN), ITEM 2 (SUPPORT RING) AND ITEM 4 (STEM) USING SI101MGD4503 E-FIELD MESH SCREEN BRAZING FIXTURE.
3. CENTER ITEM 4 (STEM) ON LAP JOINT OF ITEM 2 (SUPPORT RING) AND SOLDER WITH ITEM C8 (BRAZING WIRE).
4. SOLDER ITEM 3 (SCREEN) TO ITEM 2 (SUPPORT RING) WITH ITEM C7 (SOLDER). ALL LOOSE ENDS AND WIRES MUST BE COVERED.
5. SOLDER ITEM C1, CENTER CONDUCTOR, INTO ITEM 4 (STEM) WITH ITEM C7 (SOLDER) PER NASA STD 8739.4.
6. APPLY ITEM C9 (EPOXY) TO BOND ITEM 4 (STEM) TO ITEM 5 (INSULATOR) AND COVER SOLDERED JOINT BETWEEN ITEM C1 (CABLE) AND ITEM 4 (STEM) AS SHOWN USING SI101MGA4504 E-FIELD MESH ASSEMBLY FIXTURE.
7. APPLY ITEM C6 (CEMENT) TO END OF ITEM 5 (INSULATOR) AS SHOWN.
8. APPLY ITEM C5 (RTV) TO CLEARANCE BETWEEN ITEM C1 (CABLE) AND HOLES IN ITEM 5 (INSULATOR), ITEM 1 (BOTTOM CLAMP), AND ITEM 6 (TOP CLAMP) AT LOCATIONS SHOWN USING SI101MGA4504 E-FIELD MESH ASSEMBLY FIXTURE.
9. SURFACE TREAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE 1, CLASS 3. (GOLD COLOR). CERTIFICATE OF CONFORMANCE REQUIRED.
10. PRIOR TO ASSEMBLY, CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS OR LINT FREE CLOTH.
11. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING.
12. TEST AND INSPECT ASSEMBLY PER ACME-TST-004.
13. AFTER CLEANING, HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN LINT-FREE GLOVES.
14. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW PER SAE AS478, METHOD 35.
15. REMOVE OUTER JACKET OF ITEM C1 TO DESIGNATED POINT BEFORE CONNECTOR P45.
16. FOLD BACK EXTERNAL BRAID INTO WIDER CHANNEL FOR STRAIN RELIEF.
17. WRAP ITEM C11 WITH 2 TO 3 WRAPS AROUND EXTERNAL BRAID SO IT IS SECURELY CLAMPED BY ITEMS 1 & 6.
18. ENSURE EXPANDABLE SLEEVING, ITEM C13, IS CAPTURED BY SHRINK TUBE. ITEM C12, BUT DOES NOT EXTEND INTO THE CABLE BEND AREA.
19. USE SHRINK TUBE, ITEM C10, TO FORM CABLE, ITEM C1, AS SHOWN (90 DEGREES X .625 IN MAX). SHRINK TUBE, ITEM C10 AND C12, NOT TO EXTEND FARTHER THAN DIMENSION SHOWN.
20. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN, TRIM LABEL AS REQUIRED TO FIT

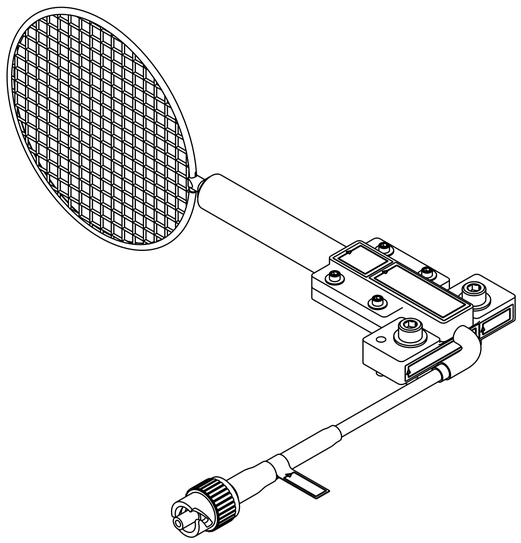

ISOMETRIC VIEW
FOR REFERENCE ONLY

CHG	ZONE	DESCRIPTION	APP/DATE
D		INCORPORATED ACME-ECO-618 AND ACME-ECO-620	AD 6/22/16 JO 6/17/16 AR 6/23/16
C		INCORPORATED ACME-ECO-500	AD 04/22/16 JO 04/25/16 AR 04/26/16
B		INCORPORATED ACME-ECO-215	AD 08/12/14 KR 08/11/14 GF 08/12/14
A		INCORPORATED ACME-ECO-029	AD 05/21/12 MP 05/16/12 GF 05/14/12

REVISIONS

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E.MCCLOSKEY DATE: 6/23/16

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCE ON	
.X	± 0.03
.XX	± 0.01
.XXX	± 0.005
FRACTION	± -
ANGULAR	± 0.50°
BREAK EDGES	N/A

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200

PROJECT LEAD	B. BOROWSKI	07/26/11
QUALITY	D. SEELEY	07/25/11
SAFETY	W. BORRELLI	07/25/11
ENGINEER	A. DRAKE	07/22/11
DESIGNER	G. FEDEVICH	07/22/11
REVIEWER	W. PREVITE	07/22/11

CONTRACT NUMBER: NNC09BA02B
DELIVERY ORDER: SPACE 110
MODEL NAME: SI101MFA1700

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

ACME CHAMBER INSERT ASSEMBLY, ON-ORBIT CONFIGURATION


SI101MFA0003

E-FIELD MESH ASSEMBLY


SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	SI101MFA1700	D	ZIN	GRC
			UNITS: INCH	
SCALE: 1/1	INITIAL REL DATE 07/26/2011	SHEET 1 OF 2	DISCIPLINE MECHANICAL	

PRO/E VERSION: Creo 2.0


SIZE D DRAWING NUMBER SI101MFA1700 REV D




DETAIL D
SCALE 6/1




DETAIL E
SCALE 4/1




DETAIL C
SCALE 2/1

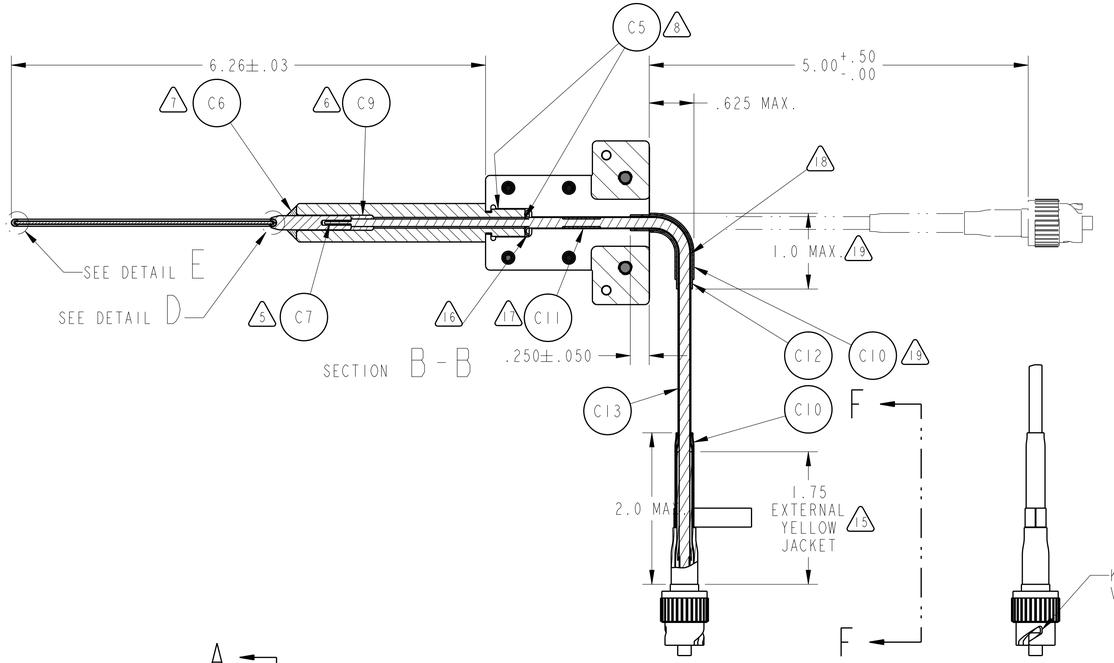


SECTION B - B





VIEW F - F

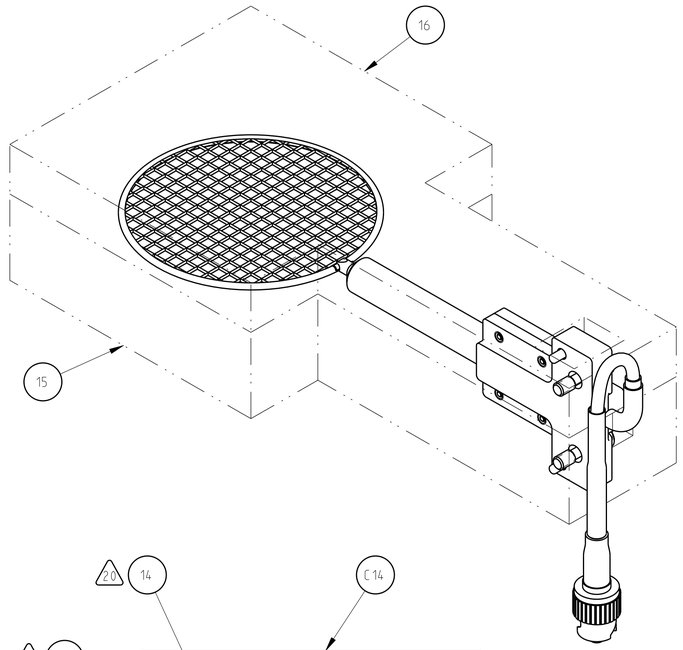

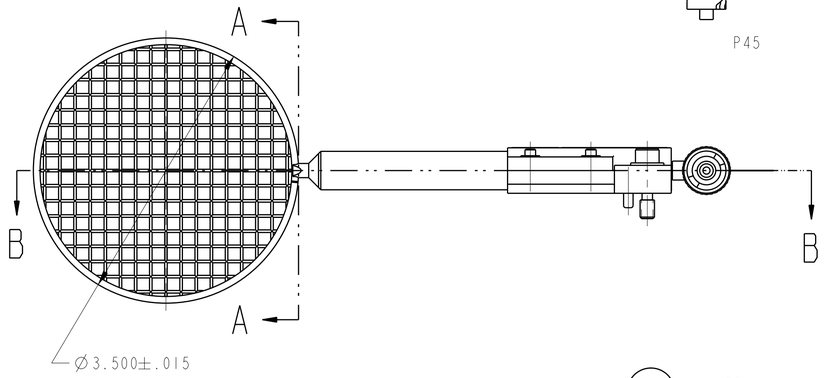

SECTION A - A
COMPONENT REMOVED
FOR CLARITY

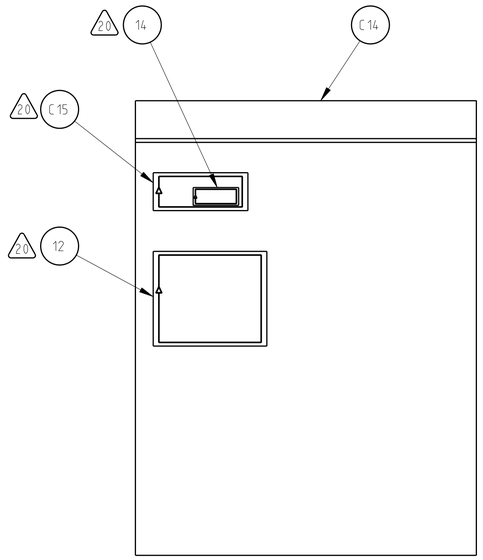

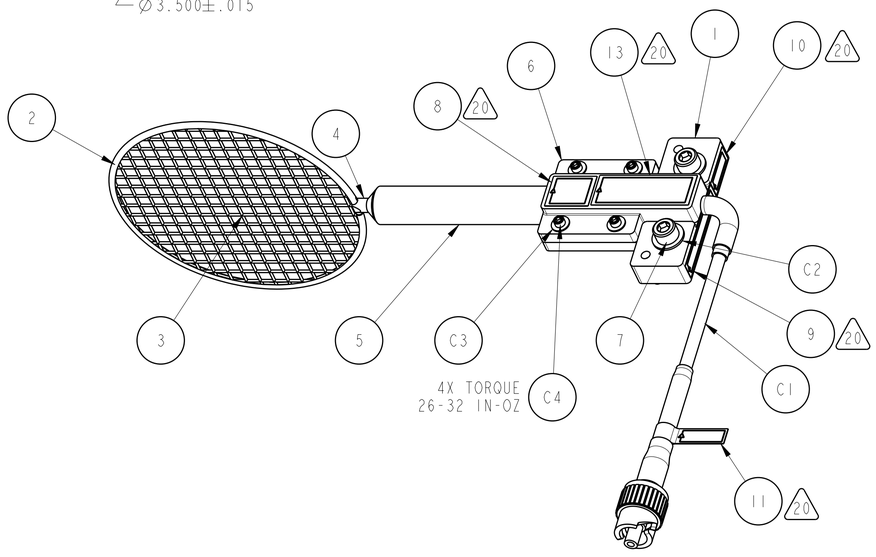

CHG	ZONE	DESCRIPTION	APP/DATE
REVISIONS			

SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	S1101MFA1700	D	ZIN	GRC
			UNITS: INCH	
SCALE: 1/1	INITIAL REL DATE 07/26/2011	SHEET 2 OF 2	DISCIPLINE MECHANICAL	

PRO/E VERSION: Creo 2.0

SIZE D DRAWING NUMBER S1101MFA1700 REV D