

DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	S1101MFA1725	E-FIELD COVER PLATE ASSEMBLY
2	1	S1101MFA1727	E-FIELD CONNECTOR SUPPORT ASSEMBLY
3	1	S1101MFD1729	E-FIELD RETAINER PLATE
4	1	S1101MFT1730-XX	COMBO LABEL
5	1	S1101MFT1730-04	CONNECTOR LABEL
6	1	S1101MFT1730-05	CONNECTOR LABEL


COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
C1	2	321884	CRIMP TERMINAL, RING TONGUE, #4, 22-16AWG UNINSULATED, NICKEL, AMP
C2	1	F404B9	HIGH VOLTAGE RECEPTACLE, 30KV DC, ALDEN PRODUCTS
C3	1	D38999/20FC35PN	WALL MOUNT RECEPTACLE, THREADED COUPLING, SHELL SIZE C, 22 SIZE 22D PINS, MIL-DTL-38999
C4	1	NAS1102E3-8	#10-32 UNJF-3A X .500 FLAT HEAD, OFFSET CRUCIFORM MACHINE SCREW
C5	4	NAS1101E04-5	SCREW, MACHINE-FLAT FILLISTER HEAD .112-40 UNJC-3A X .312 LENGTH
C6	1	NAS1101E04-7	SCREW, MACHINE-FLAT FILLISTER HEAD .112-40 UNJC-3A X .438 LENGTH
C7	5	NAS620C4L	#4 REDUCED THICKNESS FLAT WASHER REDUCED O.D.
C8	2	NAS1352N04-4	#4-40(.112) UNRC-3A X .250 SOCKET HEAD CAP SCREW
C9	A/R	M22759/11-22-5	WIRE, TEFLON, 22AWG, GREEN
C10	A/R	222MS	THREADLOCKER, LOCTITE
C11	A/R	2216 B/A	2216 B/A GRAY EPOXY 3M SCOTCH WELD EPOXY
C12	A/R	M39029/58-360	CONNECTOR CONTACT PIN, SIZE 22D, MIL-C-39029
C13	A/R	SN63PB37/RMA	SOLDER, TIN/LEAD, RMA FLUX
C14	A/R	M23053/18-106-C	TUBING, KYNAR, 1/4" DIA.
C15	A/R	660-024M13N	PROTECTIVE COVER, RECEPTACLE, SHELL SIZE 13 (GLENAIR)

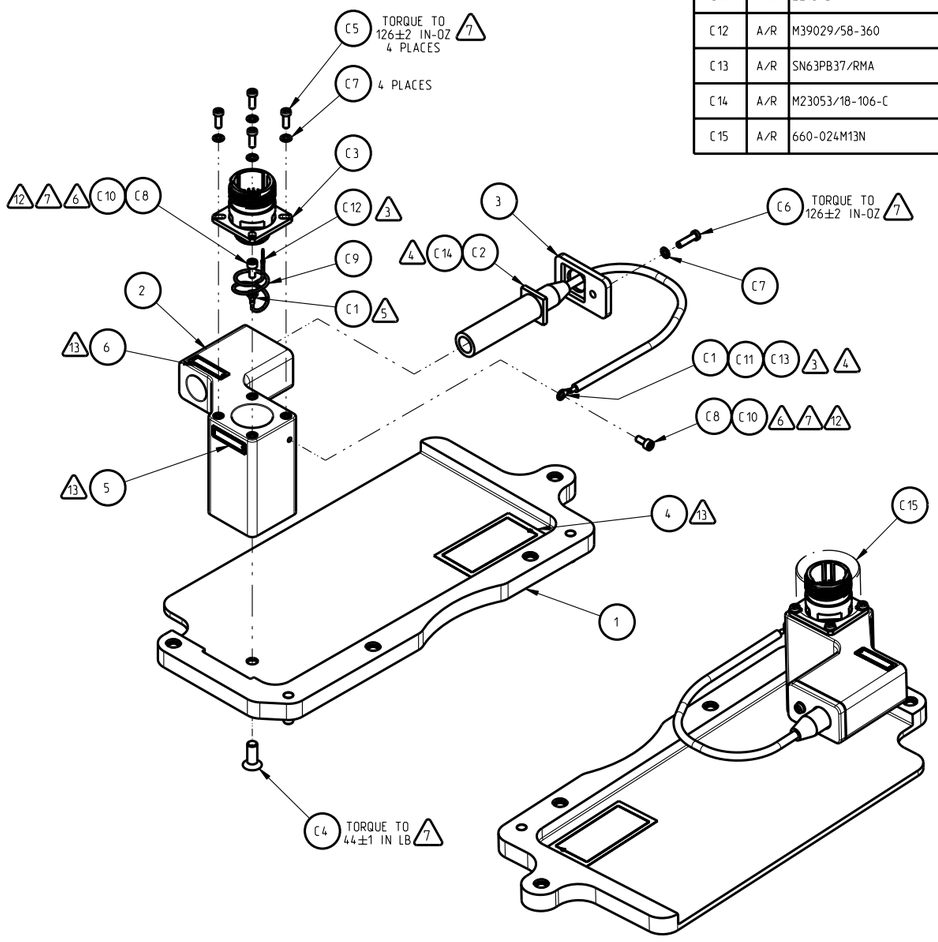



D38999 WIRING DIAGRAM

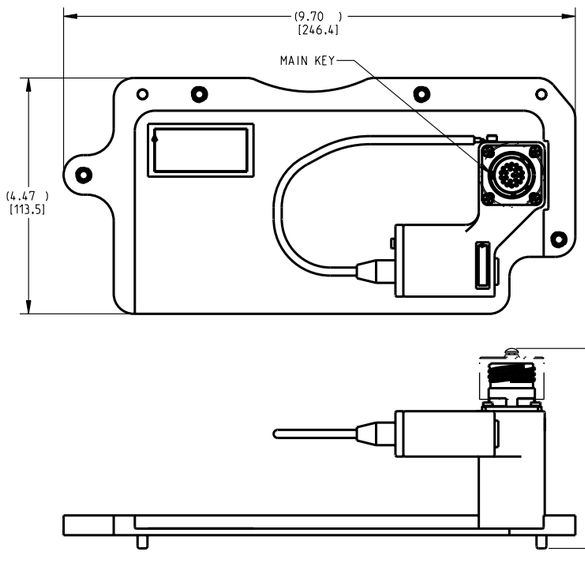

NOTES:

1. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ASSEMBLE PER APPROVED PROCESS PLAN FOR INITIAL BUILD.
3. ASSEMBLY, SOLDERING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.4 AND THE FOLLOWING NOTES:
   - A. SEE TENSILE PULL STRENGTHS LIST PER NASA-STD-8739.4.
   - B. INSTALL CONTACTS (ITEM C12) IN ALL UNUSED POSITIONS OF CIRCULAR CONNECTOR (ITEM C3).
   - C. PERFORM CONTACT RETENTION TEST PER NASA-STD-8739.4
4. TRIM LEAD OF HIGH VOLTAGE RECEPTACLE (ITEM C2) TO APPROX. 5-6 INCHES AND SOLDER RING TERMINAL (ITEM C1) TO TRIMMED END. ASSEMBLE HEAT SHRINK TUBING (ITEM C14) TO ENTIRE LENGTH OF CONNECTOR LEAD FOLLOWING MANUFACTURER'S SPECIFICATIONS. USE EPOXY (ITEM C11) TO COVER ANY SHARP EDGES AS REQUIRED.
5. USING 5-6 INCHES OF WIRE (ITEM C9), CRIMP RING TERMINAL (ITEM C1) TO ONE END AND 22 AWG CRIMP CONTACT FROM CONNECTOR (ITEM C3) TO OPPOSITE END.
6. APPLY THREAD LOCKING COMPOUND PER ESTABLISHED PROCEDURES.
7. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING OR ASSEMBLY PROCEDURE.
8. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
9. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
10. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
11. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
12. TIGHTEN SNUG TIGHT PER ESTABLISHED PROCEDURES.
13. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.

CRIMP TOOL LIST

CONTACT P/N	CRIMP TOOL	POSITIONER	INSERT/EXTRACT	REF. DES.
M39029/58-360	M22520/2-01	M22520/2-09	M81969/14-01	P11
321884	69363 OR EQUIV.	N/A	N/A	N/A

TENSILE PULL STRENGTH LIST

MANUFACTURER	CONTACT P/N	WIRE AWG	LBS
QPL	M39029/58-360	22	13
AMP	321884	22	15

REV	DESCRIPTION	APPROVED
B	INCORPORATED ACME-ECO-516.	LF 12/07/16 AK 12/07/16 AD 12/07/16
A	INCORPORATED ACME-ECO-366	KR 9/17/14 GF 9/18/14 AD 9/18/14

REVISION HISTORY

S1101MFA0100
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL. DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: E.McCLOSKEY 12/08/2016
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	K.RHODES 1/15/14	QUALITY	D.SEELEY 1/22/14
REVIEWER	M.ATKIN 1/21/14	MATERIALS	M.WILKINSON 1/16/14
MECHANICAL	A.DRAKE 1/15/14	PROJ LEAD	B.BOROWSKI 1/24/2014
ELECTRICAL	T.GOBELI 1/24/14		
STRUCTURAL	C.WERNER 1/17/14		
SAFETY	B.BORRELLI 1/15/14		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE: E-FIELD COVER ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1730	B

SCALE 3/4 | INITIAL REL DATE 1/24/14 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL: S1101MFA1730

PRO/E VERSION: Wildfire 5.0

DWG NO S1101MFA1730 | SH 1 | REV B

ZIN_D_2012.frm