
COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION	MANUFACTURER
C1	1	1825-2	PLUG BANANA, RED	POMONA
C2	1	1825-0	PLUG BANANA, BLACK	POMONA
C3	2	MU14-14FLK	FORK TERMINAL, 1/4" STUD, AWG 16-14	3M
C4	A/R	M22759/11-16-2	1/C, 16 AWG, PTFE INSULATED, RED	QPL
C5	A/R	M22759/11-16-0	1/C, 16 AWG, PTFE INSULATED, BLACK	QPL
C6	A/R	FMC-EXPHRZZZ-003-32	EXPANDABLE SLEEVING, 1/8" DIA, BLACK	BENTLEY HARRIS
C7	A/R	2140	TINNED COPPER BRAID, 3/16"	ALPHA
C8	A/R	THFE4-365012	HEAT SHRINK TUBING, 0.356" ID	SAINT-GOBAIN
C9	A/R	TZE-211	LABEL, P-TOUCH, 1/4", BLACK ON WHITE	BROTHER
C10	2	PLT1M-M	CABLE TIE, 4" NYLON	PANDUIT


LABEL LIST	
ITEM	INSCRIPTION
L1	P1A
L2	P2A
L3	P1B
L4	P2B
L5	S1101EGA4565 SN xxxx



SCHEMATIC

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. HARNESS ASSEMBLY AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.4 AND THE FOLLOWING NOTES:
   a. WIRE TWIST SHALL BE BETWEEN 8 AND 16 TIMES THE OUTER DIAMETER OF THE HARNESS UNLESS OTHERWISE NOTED. (FROM NASA-STD-8739.4 PARA 7.3.20)
5. ASSEMBLE BANANA PLUGS PER MANUFACTURER'S PROCEDURES.
6. TEST PER NASA-STD-8739.4 PARA 18.2.6 USING THE FOLLOWING:
   CONTINUITY: < 5 OHMS
   DWV: VOLTAGE: 1500 ±75VDC
   CURRENT: < 1 MILLIAMP
   DURATION: < 1 MINUTE
   IR: VOLTAGE: 500 ±75VDC
   RESISTANCE: < 100 MEG OHMS
   DURATION: < 1 MINUTE
7. PLACE COMPLETED ASSEMBLY IN CLEAN, STATIC-SHIELDING PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER PER SAE AS478, METHOD 35D. STORE IN A PROJECT APPROVED STORAGE AREA.

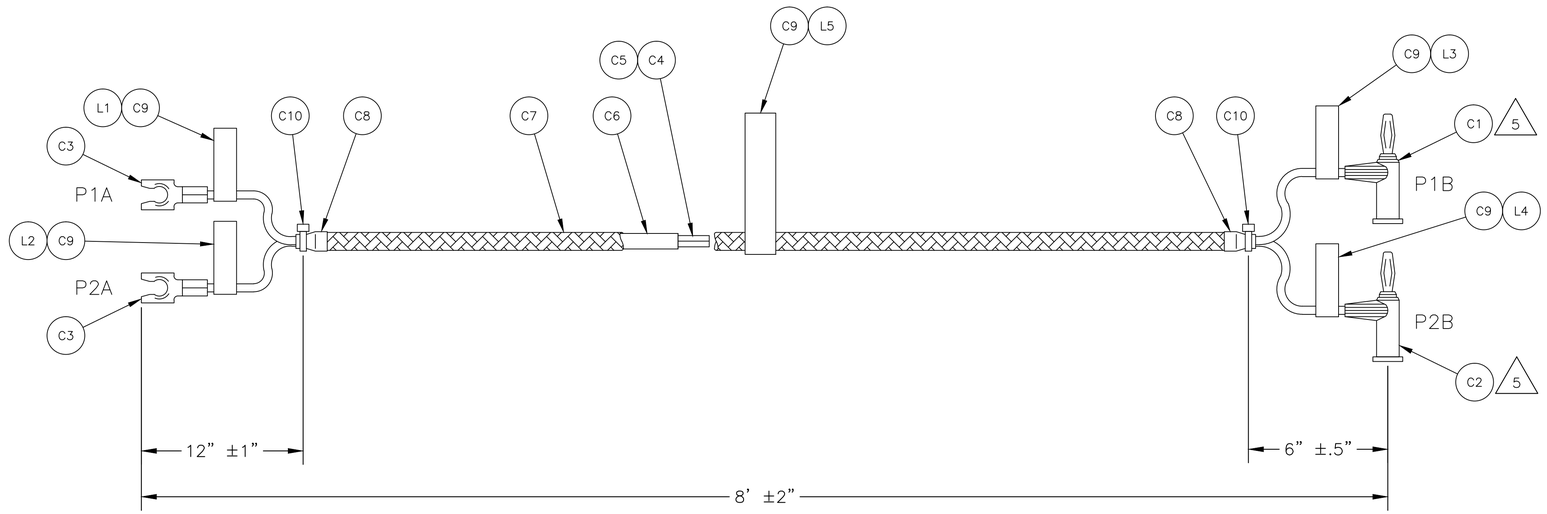

CRIMP TOOL LIST			
CONTACT P/N	CRIMP TOOL	POSITIONER	I/E TOOL
MU14-14FLK	TR-490	N/A	N/A

TENSILE PULL STRENGTH LIST			
MANUFACTURER	CONTACT P/N	WIRE AWG	LBS
3M	MU14-14FLK	16	50

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS 0.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL; DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED:	R. TURK 11/17/14		
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.			
DESIGNER	M. HOMKO 11/13/14	QUALITY	D. SEELEY 11/17/14
REVIEWER	J. BRUEWER 11/13/14	MATERIALS	M. WILKINSON 11/13/14
MECHANICAL	A. DRAKE 11/13/14	PROJ LEAD	B. BOROWSKI 11/17/14
ELECTRICAL	T. GOBELI 11/17/14		
STRUCTURAL	C. WERNER 11/14/14		
SAFETY	W. BORRELLI 11/14/14		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

REV	DESCRIPTION	APPROVED

REVISION HISTORY

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
UML SIMULATOR EMI
RADIATED HARNESS SET

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101EGA4565	-

SCALE NONE | INITIAL REL DATE 11/17/14 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL NAME: S1101EGA4565_REV_-.DWG

AutoCAD 2012

DWG NO S1101EGA4565 | SH 1 | REV -