


COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	A/R	1010	ALUMINUM T-SLOTTED PROFILE. 1" X 1" (80/20 INC.)
C2	16	4119	BRACKET. 2 HOLE INSIDE CORNER (80/20 INC.)
C3	8	2015	1010 END CAP. 1" X 1" X 1/8" (80/20 INC.)
C4	28	3342	FLANGED BUTTON HEAD SOCKET CAP SCREW. 1/4-20 X .50 LG (80/20 INC.)
C5	28	3313	ROLL-IN T-NUT WITH SET SCREW. 1/4-20 (80/20 INC.)
C6	4	NAS1351N4-10	SCREW. CAP. SOCKET HEAD. A286. PASSIVATED .2500-28 UNRF-3A X .625
C7	12	NAS620C416	FLAT WASHER. REDUCED OUTSIDE DIAMETER 1/4 (.2500). .063 THICK. CRES

TORQUE TABLE		
ITEM	TORQUE RANGE	UNITS
T1	4-6	FT-LB

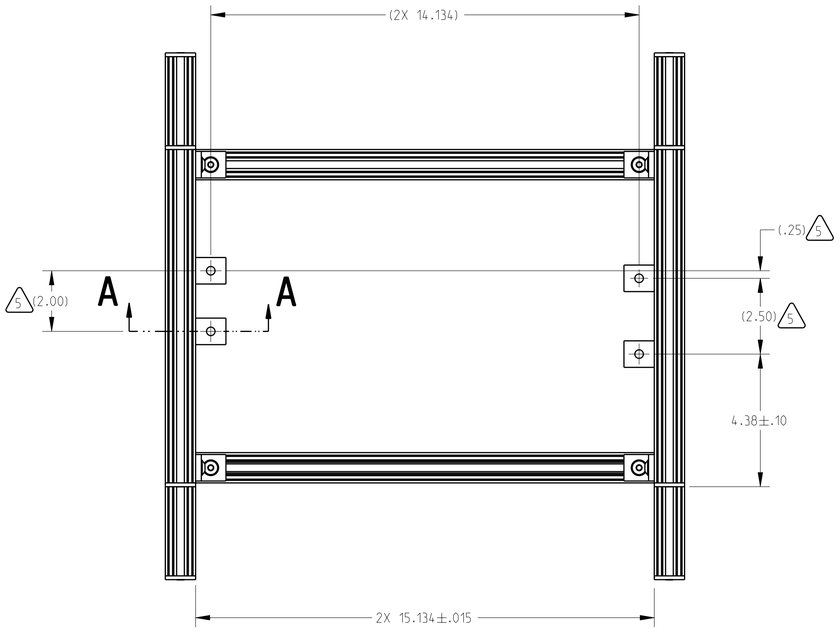


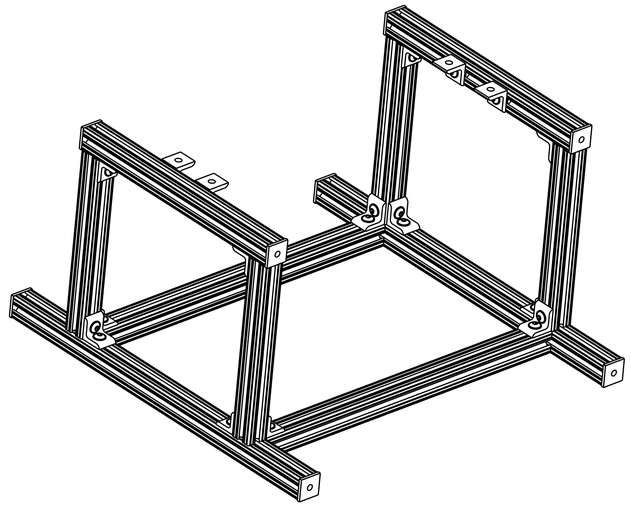

ISOMETRIC VIEW
FOR REFERENCE ONLY
SCALE 1/3

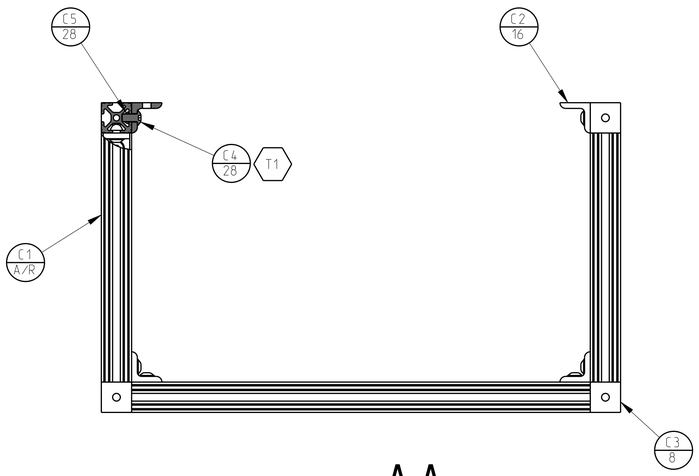

PARTIAL SECTION **A-A**

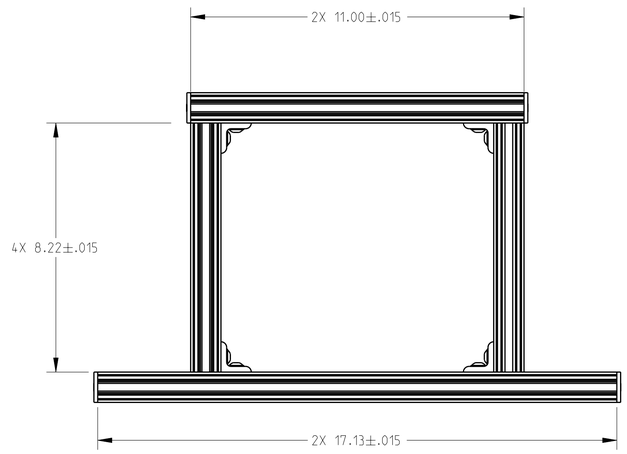

NOTES:

1. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ASSEMBLE PER APPROVED PROCESS PLAN FOR INITIAL BUILD.
3. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
4. ITEM NOT SHOWN. KIT WITH ASSEMBLY.
5. DIMENSIONS SHOWN ARE REFERENCE ONLY. USE S1101MFA1000 TO DETERMINE ACTUAL PLACEMENT.
6. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS OR LINT FREE CLOTH.
7. HANDLE ALL PARTS WITH CLEAN, LINT-FREE GLOVES.
8. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

REV	DESCRIPTION	APPROVED
3	REVISED TORQUE T1 BASED ON UPDATED VENDOR SPECIFICATIONS.	J.OGRIN 10/29/15 A.DRAKE 10/30/15 K.RHODES 12/4/15
2	INITIAL REPOSITORY RELEASE.	J.OGRIN 08/21/15 A.DRAKE 08/25/15 J.FORTUNA 09/14/15 B.BOROWSKI 09/16/15

REVISION HISTORY

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED:

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER		QUALITY	
REVIEWER		MATERIALS	
MECHANICAL		PROJ LEAD	
ELECTRICAL			
STRUCTURAL			
SAFETY			

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14A02C
PROJECT CODE: S2-BT3

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE: EMS STAND

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MGA4559	3

SCALE 2/5 & NOTED | INITIAL REL DATE | SHEET 1 OF 1

RELEASE LEVEL: WORKING
MODEL: S1101MGA4559

PRO/E VERSION: Wildfire 5.0

DWG NO S1101MGA4559 | SH 1 | REV 3

ZIN_D_2012.frm