COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
C1	3	PLTIM-M702Y	CABLE TIE, HALAR FLUOROPOLYMER, PANDUIT CORP.
C2	2	M39029/22-191	CONNECTOR CONTACT SOCKET, SIZE 22, MIL-C-39029
C3	1	FGG.0B.303.SYBD31	STRAIGHT PLUG CONNECTOR, 0B SERIES, LEMO
C4	A/R	M22759/11-22-0	22 AWG WIRE, SILVER COATED STRANDED COPPER, FLUOROPOLYMER INSULATED, EXTRUDED TFE, BLACK
C5	A/R	TRA-CAST 3145	ELECTRICALLY INSULATING EPOXY ADHESIVE, TRA-CON INC.
C6	-	DELETED	DELETED
C7	1	MS51830CA102	MINIATURE INSERT FOR .112-40 UNJC-3A IN. FASTENER
C8	3	FGG.0B.561.ZZC	LEMO MALE CONTACT, CRIMP TYPE
C9	A/R	50111000632S	EXPANDABLE BRAIDED SLEEVING, EXPANDO HR, 1/4 DIA., BLACK WITH WHITE TRACER, BENTLEY HARRIS
C10	1	FGG.0B.742.DN	COLLET, LEMO 0B SERIES, 3.2MM TO 4.2MM
C11	A/R	2216 B/A	2216 B/A GRAY EPOXY 3M SCOTCH WELD EPOXY
C12	1	BFG-0B-100-PCSG	CONNECTOR CAP (LEMO)
C13	1	S-14108	BAG, ANTI-STATIC, 6 IN. X 9 IN. (ULINE)
C14	A/R	SDG32104805-018	DECAL, ELECTROSTATIC SYMBOL
C15	1	SDG32112207-001	ZIPLOCK STOWAGE LABEL

DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	SI101MFD1314	IGNITER UPPER ARM, 0 MM POSITION
2	1	SI101MFD1321	IGNITER UPPER ARM INSULATOR
3	1	SI101MFT1313-XX	BAG CONTENTS LABEL
4	1	SI101MFT1313-03	CONNECTOR IDENTIFICATION LABEL
5	1	SI101MFT1313-XXX	BAG IMS LABEL

TENSILE PULL STRENGTH LIST

MANUFACTURER	CONTACT P/N	WIRE AWG	LBS
QPL	M39029/22-191	22	13
LEMO	FGG.0B.561.ZZC	22	12

CRIMP TOOL LIST

CONTACT P/N	CRIMP TOOL	POSITIONER	REF. DES.
M39029/22-191	M22520/2-01	K330-3	J8
FGG.0B.561.ZZC	M22520/7-01	DCE.91.090.BVC	P7

10. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

△11 REMOVE COLLET FROM ITEM C3 AND DISCARD. REPLACE WITH ITEM C10.

△12 STAKE BACKSHELL USING EPOXY (ITEM C11).

△13 APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.

14. SEE SHEET 2 FOR ADDITIONAL INFORMATION.

NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.

△2. INSTALL THREADED INSERT PER MS51835. VERIFY INSERT IS BELOW SURFACE BEFORE SETTING KEYS.

3. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE 1, CLASS 3.

4. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.

5. HANDLE WITH CLEAN, LINT-FREE GLOVES.

6. HARNESS ASSEMBLY AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1, NASA-STD-8739.4 AND THE FOLLOWING NOTES:

   A. TWIST WIRES BETWEEN 8 AND 16 TIMES THE OUTER DIAMETER OF THE HARNESS.

   B. SEE TENSILE PULL STRENGTHS LIST PER NASA-STD-8739.4 AND/OR MANUFACTURERS SPECIFICATIONS.

   C. INSTALL CONTACTS IN ALL UNUSED POSITIONS OF CIRCULAR CONNECTOR.

   D. PERFORM CONTACT RETENTION TEST PER NASA-STD-8739.4 AND/OR MANUFACTURERS SPECIFICATIONS.

7. FILL CAVITIES IN ITEM 2 (INSULATOR) & COVER ANY EXPOSED WIRES WITH ITEM C5 (EPOXY) AS SHOWN.

△8. FILL CAVITY BETWEEN ITEM 1 (UPPER ARM) & ITEM 2 (INSULATOR) WITH ITEM C5 (EPOXY) AS SHOWN.

9. TEST PER NASA-STD-8739.4 PARAGRAPH 18.2.6 USING THE FOLLOWING LEVELS:

   CONTINUTY: <.5 OHMS

   DWV VOLTAGE: 1500±75 VDC
   CURRENT: <1 MILLAMP
   DURATION: <1 MINUTE

   IR VOLTAGE: 500±75 VDC
   RESISTANCE: >100 MEG OHMS
   DURATION: <1 MINUTE

CHG	ZONE	DESCRIPTION	APP/DATE
F		INCORPORATED ACME-ECO-548	LF 11/07/16 AK 11/07/16 AD 11/08/16
E		INCORPORATED ACME-ECO-434	J.O. 04/28/15 G.F. 04/30/15 A.D. 05/15/15
D		INCORPORATED ACME-ECO-388	K.R. 11/06/14 A.D. 11/07/14 G.F. 11/07/14
C		INCORPORATED ACME-ECO-169	A.D. 08/21/13 K.R. 08/22/13 G.F. 08/21/13
B		INCORPORATED ACME-ECO-049	A.D. 02/21/13 K.R. 03/06/13 G.F. 02/21/13
A		INCORPORATED ACME-ECO-023 & ACME-ECO-030	A.D. 03/21/12 M.P. 03/21/12 G.F. 03/20/12

REVISIONS

REV F

SIZE D DRAWING NUMBER SI101MFA1313

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E.McCLOSKEY DATE: 11/08/16

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCE ON	
.X	± 0.03
.XX	± 0.01
.XXX	± 0.005
FRACTION	± -
ANGULAR	± 0.50°
BREAK EDGES	N/A

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

PROJECT LEAD	B. BOROWSKI	05/24/11
QUALITY	D. SEELEY	05/20/11
SAFETY	W. BORRELLI	05/24/11
ENGINEER	A. DRAKE	05/18/11
DESIGNER	G. FEDEVICH	05/18/11
REVIEWER	M. PREVITE	05/18/11

CONTRACT NUMBER: NNC09BA02B
DELIVERY ORDER: SPACE 110
MODEL NAME: SI101MFA1313

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

ACME CHAMBER INSERT ASSEMBLY

SI101MFA0100

IGNITER UPPER ARM ASSEMBLY, 0 MM POSITION

SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	SI101MFA1313	F	ZIN	GRC


UNITS: INCH

SCALE:	INITIAL REL DATE	SHEET	DISCIPLINE
3/2	05/24/2011	1 OF 2	MECHANICAL


PRO/E VERSION: Wildfire 2.0

NOTES:


1. SEE SHEET 1 FOR ADDITIONAL INFORMATION, GENERAL NOTES AND TOLERANCES.

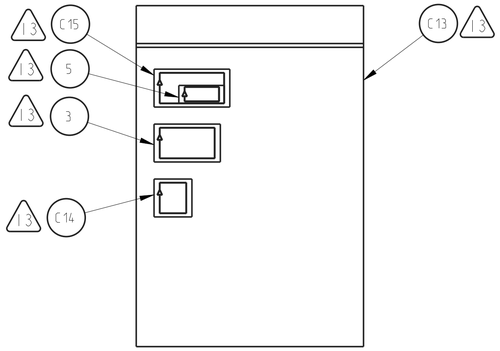


SCALE 1/2




VIEW C - C

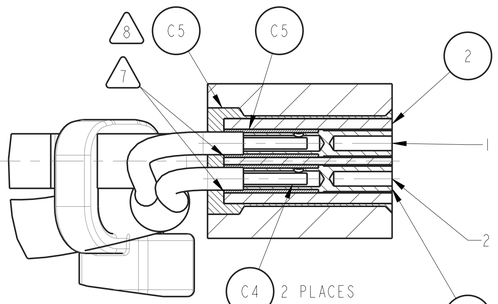


SECTION A - A
SCALE 6/1

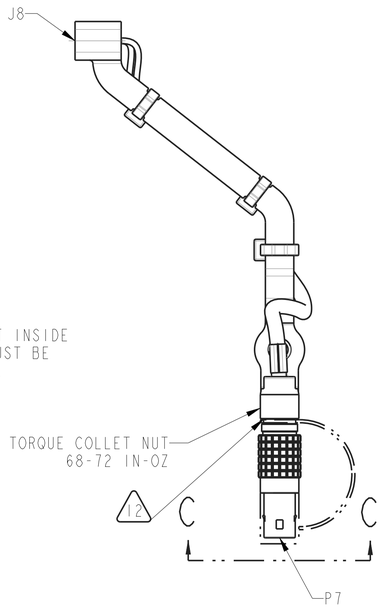

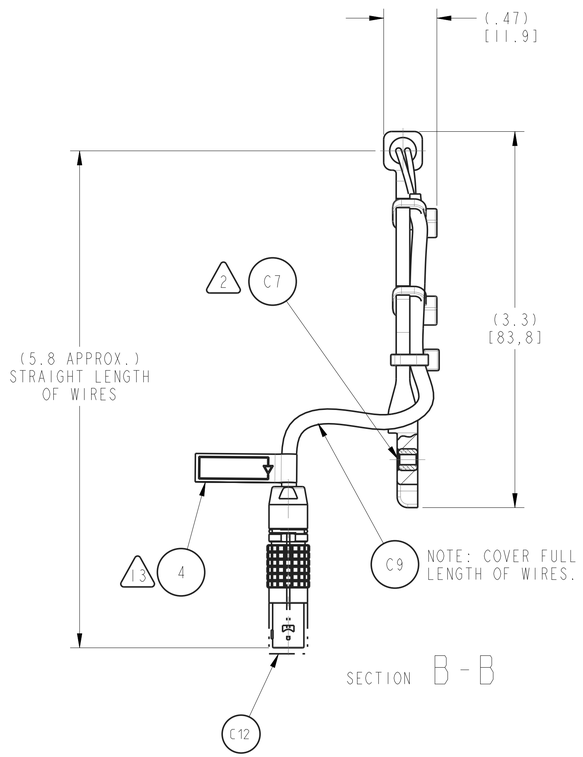

SECTION B - B

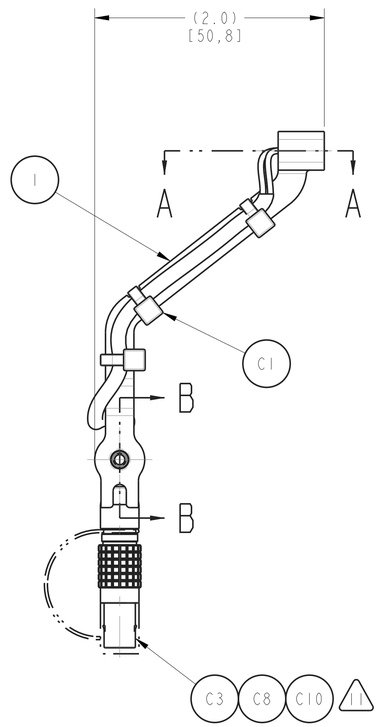



CHG	ZONE	DESCRIPTION	APP/DATE
REVISIONS			

SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	S1101MFA1313	F	ZIN	GRC
			UNITS: INCH	
SCALE: 3/2	INITIAL REL DATE 05/24/2011	SHEET 2 OF 2	DISCIPLINE MECHANICAL	

PRO/E VERSION: Wildfire 2.0

SIZE D DRAWING NUMBER S1101MFA1313 REV F