
DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	S1101MFA1628	200mm THERMOCOUPLE MOUNTING BRACKET ASSEMBLY, RELAY SIDE
2	1	S1101MFP1631	MODIFIED FAR FIELD THERMOCOUPLE FASTENER
3	1	S1101MFT1627-XX	BAG LABEL
4	1	S1101MFT1627-02	CONNECTOR LABEL
5	1	S1101MFT1627-03	PART NAME LABEL
6	1	S1101MFA1640	200mm THERMOCOUPLE COVER ASSEMBLY


COMMERCIAL PARTS LIST


ITEM	QTY	PART NUMBER	DESCRIPTION
C1	1	600-057	MICRO-BAND, FLAT, .12 X 8.12 LG, GLENAIR
C2	1	MS9390-090	PIN, STRAIGHT, HEADLESS, DOWEL, CRES STANDARD, .09375 X .375LG
C3	1	NAS620C10L	#10 REDUCED THICKNESS FLAT WASHER REDUCED O.D.
C4	1	92420283-052	TYPE "K" THERMOCOUPLE, 5.2" SHEATH LENGTH, MARLIN MFG
C5	A/R	TRA-CAST 3145	ELECTRICALLY INSULATING EPOXY ADHESIVE, TRA-CON INC.
C6	1	1280	MINI-WIRE CLAMP, MARLIN
C7	-	DELETED	
C8	A/R	THFE4-115009	HEAT SHRINK TUBING, .115" I.D., SAINT-GOBAIN
C9	-	DELETED	
C10	-	DELETED	
C11	A/R	2216 B/A	2216 B/A GRAY EPOXY 3M SCOTCH WELD EPOXY
C12	1	1210-K	MINI 2-POLE JACK (MARLIN MFG.)
C13	1	S-14108	BAG, ANTI-STATIC, 6 IN. X 9 IN. (ULINE)

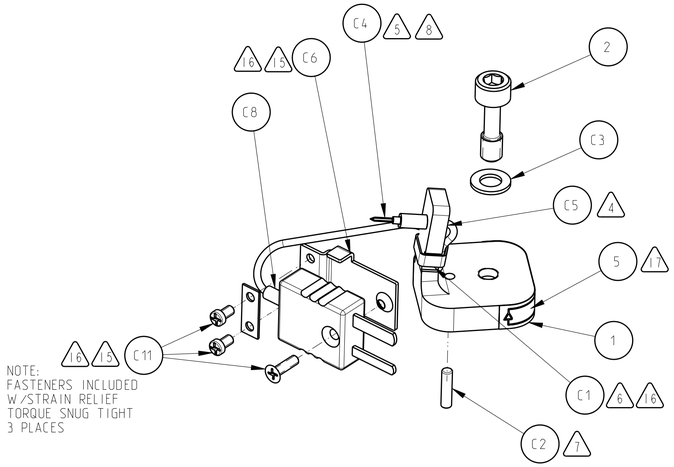


NOTE:
FASTENERS INCLUDED
W/STRAIN RELIEF
TORQUE SNUG TIGHT
3 PLACES

ITEMS 6 AND C12 NOT SHOWN

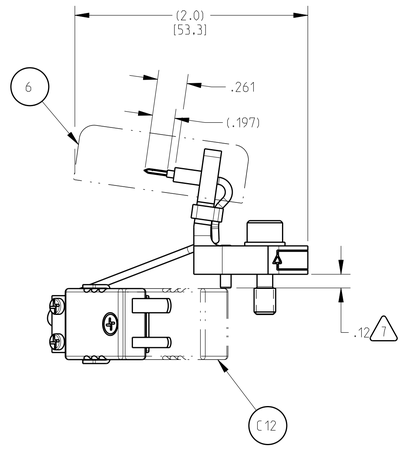

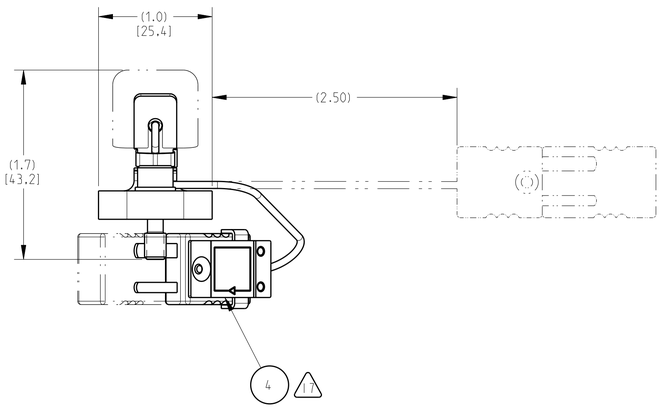

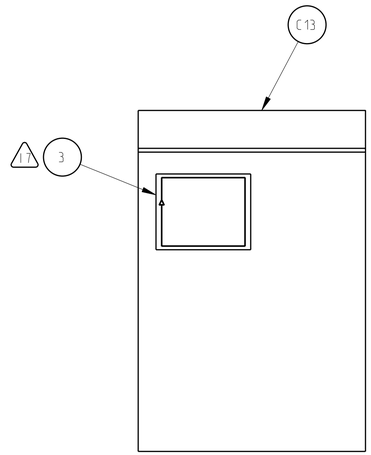

SCALE 1/2

NOTES:

1. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ASSEMBLE PER APPROVED PROCESS PLAN FOR INITIAL BUILD.
3. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
4. BONDING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1.
5. ACTUAL THERMOCOUPLE WIRE ROUTING TO BE DETERMINED BY TECHNICIAN AT TIME OF ASSEMBLY.
6. USE GLENAIR BANDING TOOL FOR 600-0061 FOR MICRO-BAND INSTALLATION.
7. PRESS FIT PIN TO DIMENSION SHOWN.
8. APPROXIMATE THERMOCOUPLE SHEATH LENGTH 3.8"
9. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
10. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
11. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
12. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
13. DELETED
14. DELETED
15. PRIOR TO INSTALLATION, BREAK ALL SHARP EDGES ON CLAMP AND STRAIN RELIEF.
16. APPLY EPOXY (ITEM #C11) TO EXPOSED THREADS AND SHARP EDGES OF C1 BANDS.
17. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.

REV	DESCRIPTION	APPROVED
D	INCORPORATED ACME-ECO-616	JO 6/28/16 AD 7/14/16 AR 7/18/16
C	INCORPORATED ACME-ECO-447 AND ACME-ECO-534.	AD 4/29/16 JO 5/2/16 AR 5/2/16
B	INCORPORATED ACME-ECO-250 INCORPORATED ACME-ECO-227	KR 1/6/14 GF 1/6/14 AD 1/7/14
A	INCORPORATED ACME-ECO-193	KR 8/12/13 MA 8/12/13 AD 8/12/13

REVISION HISTORY

DWG NO S1101MFA1627 SH 1 REV D

S1101MFA0100
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
.X ± .03
.XX ± .01
.XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: _____
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	K.RHODES 1/22/13	QUALITY	D.SEELEY 2/5/13
REVIEWER	M.PREVITE 1/24/13	MATERIALS	M.WILKINSON 1/22/13
MECHANICAL	A.DRAKE 1/23/13	PROJ LEAD	B.BOROWSKI 2/5/13
ELECTRICAL	T.GOBELI 1/23/13		
STRUCTURAL	C.WERNER 1/25/13		
SAFETY	M.BORRELLI 1/24/13		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
200mm THERMOCOUPLE ASSEMBLY, RELAY SIDE

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1627	D

SCALE 3/2 & NOTED | INITIAL REL DATE 2/5/13 | SHEET 1 OF 1

RELEASE LEVEL: ECO
MODEL: S1101MFA1627

PRO/E VERSION: Wildfire 2.0

ZIN_D_2012.frm