


NOTES:


1. MATERIAL: 2# XLPE, CROSS LINKED POLYETHYLENE FOAM. LAYER THICKNESS AS NEEDED.
2. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
3. DIMENSIONS SHOWN ABOUT COMMON CENTERLINE TO BE POSITIONED ±.063 IN.
4. HANDLE WITH CLEAN, LINT-FREE GLOVES.
5. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW. BY TAGGING PER SAE-AS478-35D.

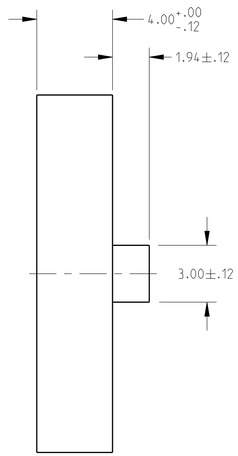

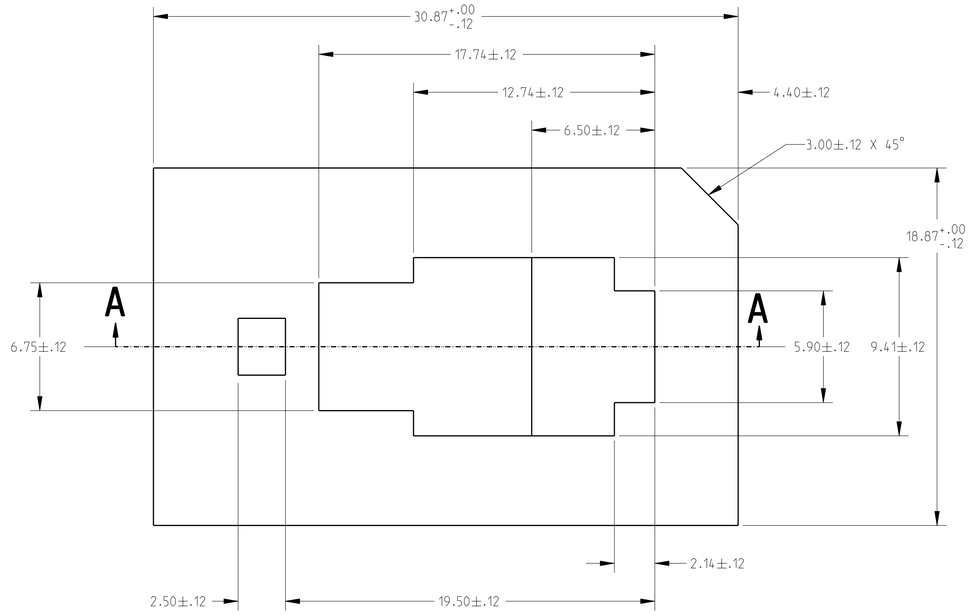



SECTION **A-A**

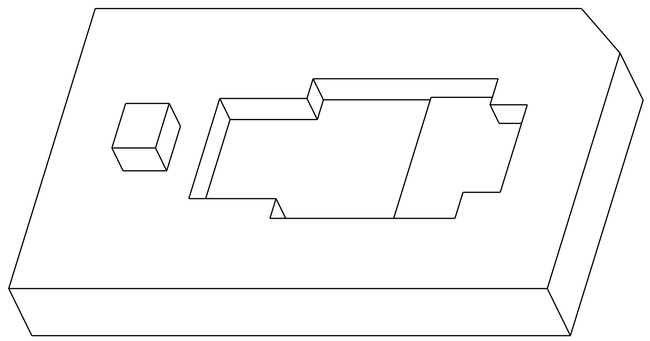

S1101MGA5006	THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.		ZIN TECHNOLOGIES 6745 ENGLE ROAD AIRPORT EXECUTIVE PARK CLEVELAND, OHIO 44130 (440) 625-2200 www.zin-tech.com	NATIONAL AERONAUTICS AND SPACE ADMINISTRATION JOHN H. GLENN RESEARCH CENTER LEWIS FIELD CLEVELAND, OHIO
NEXT ASSEMBLY	APPROVED: *L.McCLOSKEY 02/04/16*			
UNLESS OTHERWISE SPECIFIED: 1. ALL DIMENSIONS ARE IN INCHES 2. BREAK EDGES .010-.020 3. INSIDE CORNERS R.02 MAX 4. LINEAR TOLERANCES .X ± .03 .XX ± .01 .XXX ± .005 5. ANGULAR TOLERANCE ± .5°	PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.			TITLE: CAMERA VIBE UPPER FOAM
	DESIGNER	*A.REID 02/09/16*	QUALITY	*L.WRIGHT 02/03/16*
	REVIEWER	*J.OGRIN 02/03/16*	MATERIALS	*M.WILKINSON 02/02/16*
	MECHANICAL	*A.DRAKE 02/02/16*	PROJ LEAD	*B.BOROWSKI 02/04/16*
	ELECTRICAL	*T.GOBELI 02/04/16*		
THIRD ANGLE PROJECTION	STRUCTURAL	*C.WERNER 02/04/16*		
	SAFETY	*R.BORRELLI 02/02/16*		
	DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994		CONTRACT NUMBER: NNC14CA02C PROJECT CODE: S2-BT3	SIZE D · CAGE CODE 0SG68 · DWG NO S1101MGD5011 · REV - · SCALE 1/4 · INITIAL REL DATE · SHEET 1 OF 1

REV	DESCRIPTION	APPROVED
REVISION HISTORY		

RELEASE LEVEL: WORKING
MODEL: S1101MGD5011

PRO/E VERSION: Creo 2.0

REV - | SH 1 | DWG NO S1101MGD5011

ZIN_D_2012.frm