

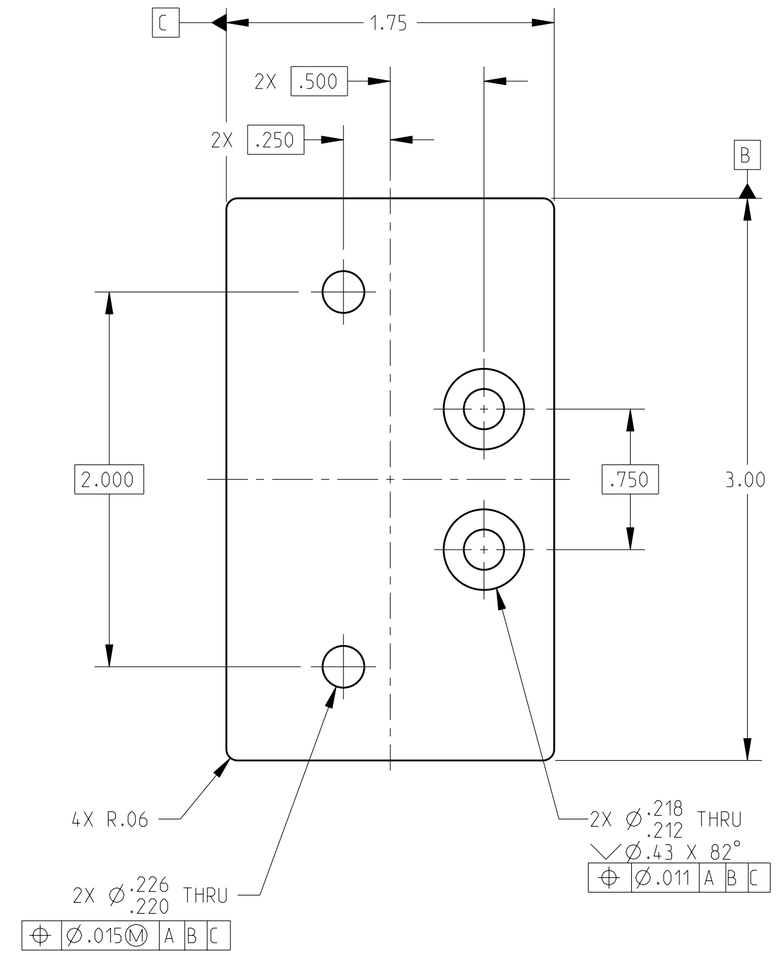


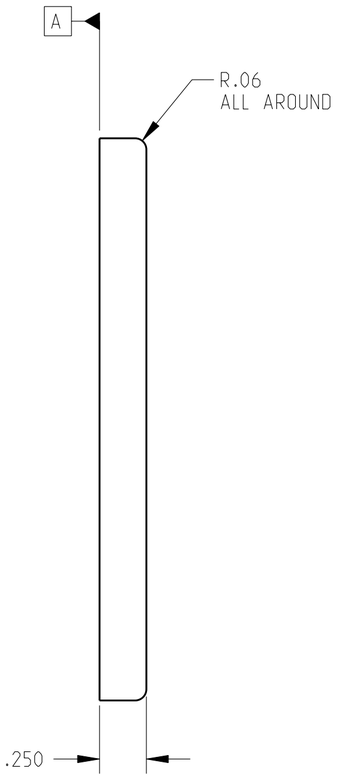

NOTES:

1. MATERIAL: 6061-T6 OR T651 ALUMINUM ALLOY PER AMS 4027, AMS 4117 OR ASTM B221.
2. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
3. 125 µIN Ra ALL MACHINED SURFACES PER ANSI/ASME B46.1 UNLESS OTHERWISE SPECIFIED.
4. CHEMICAL CONVERSION COAT PER MIL-DTL-5541, TYPE I, CLASS 3.
5. CLEAN ALL SURFACES WITH ISOPROPYL OR ETHYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
6. HANDLE WITH CLEAN, LINT-FREE GLOVES.
7. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

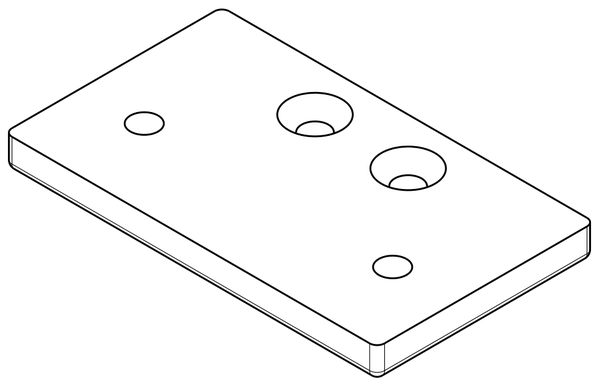

ISOMETRIC VIEW
FOR REFERENCE ONLY

REV	DESCRIPTION	APPROVED
1	INITIAL REPOSITORY RELEASE.	JO 5/2/16 AD 5/3/16 AR 5/3/16

REVISION HISTORY

S1101MGA6061
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: _____

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER		QUALITY	
REVIEWER		MATERIALS	
MECHANICAL		PROJ LEAD	
ELECTRICAL			
STRUCTURAL			
SAFETY			

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
BLACK BODY MOUNTING ARM BRACKET

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101MGD6060	1

SCALE	INITIAL REL DATE	SHEET
3/2		1 OF 1

RELEASE LEVEL: WORKING
MODEL: S1101MGD6060

PRO/E VERSION: Creo 2.0

REV 1
SH 1
DWG NO S1101MGD6060

ZIN_C_2012.frm