

New ACME Layout – Everything

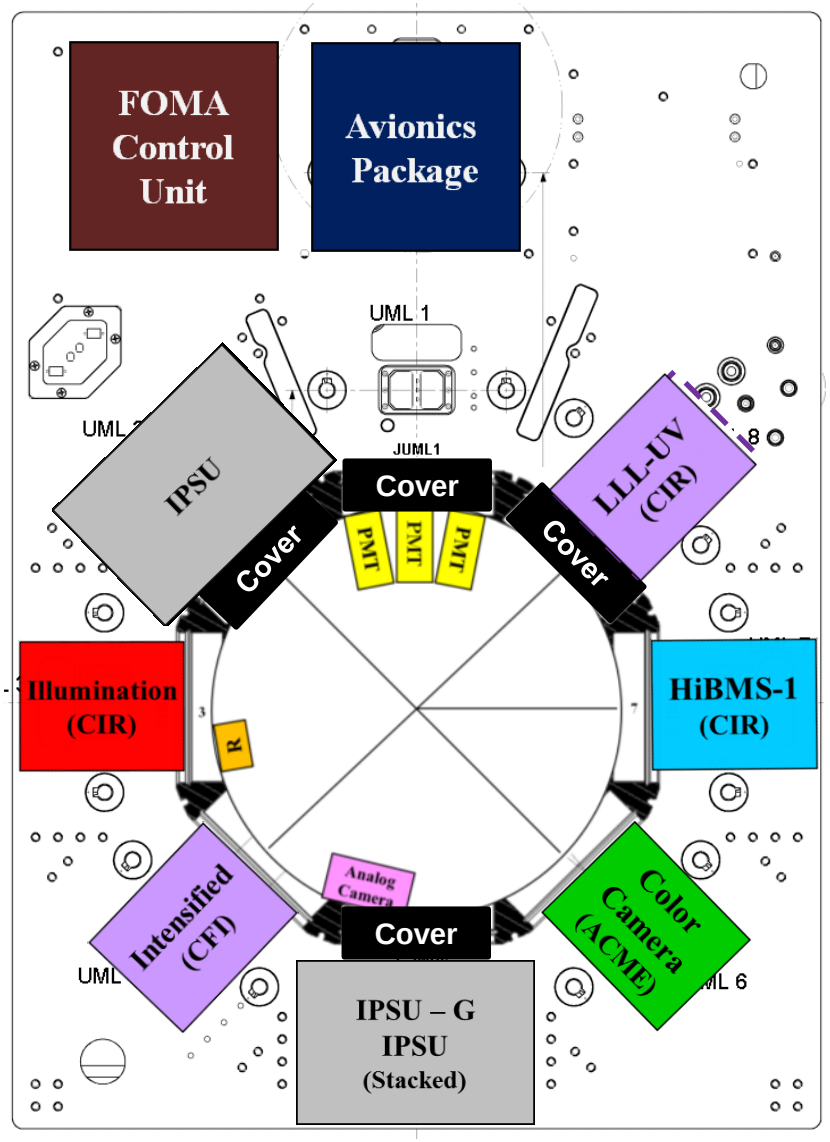

UML1 = Empty
UML2 = IPSU2 w/ Corner Adapter (for LLL-UV)
UML3 = Illumination Package
UML4 = Intensified Camera
UML5A = IPSU1 (for HiBMs-1)
UML5B = IPSU5 (IPSU-G for ACME Color)
UML6 = ACME Color Camera
UML7 = HiBMs-1
UML8 = LLL-UV (not used until s-Flame experiment)

New ACME Layout – 4 Experiments

Glenn Research Center

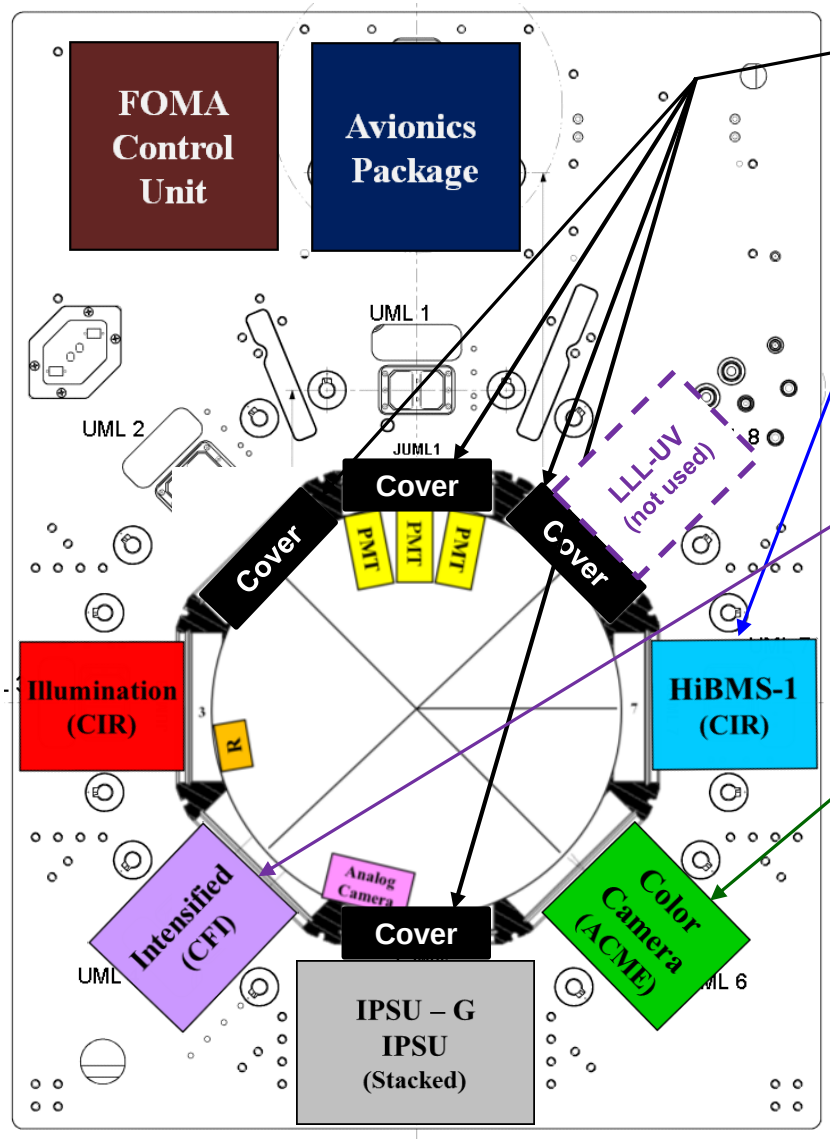

Window Blanks/Covers (non-reflective)
- Locations: UML1, UML2, UML5, UML8
- Installed from inside chamber

HiBMs Package
- w/ Illumination Package as Backlight
- Interfaces w/ IPSU
- Filter: Compensator 2 (Backlight λ)
- Relay Lens:
  - 30mm (Gasjet & CoFlow)
  - 50mm (Spherical & BRE)

Intensified Camera Package
- Interfaces w/ IPSU-G (Gig-E)
- Fixed 80mm Lens & Filter Barrel
- Longer data cable – not required

ACME Color Camera Package
- Interfaces w/ IPSU-G (Gig-E)
- Motorized Zoom Lens & Filter Barrel


***IPSU-G & IPSU Stack**
- IPSU-G supports Intensified/ACME Color
- IPSU supports HiBMs/illumination

***HiBMs-2 Package**
- Removed (stowage)

***LLL-UV Package**
- Could be placed at UML8 for stowage

New ACME Layout – sFlame Only

Glenn Research Center

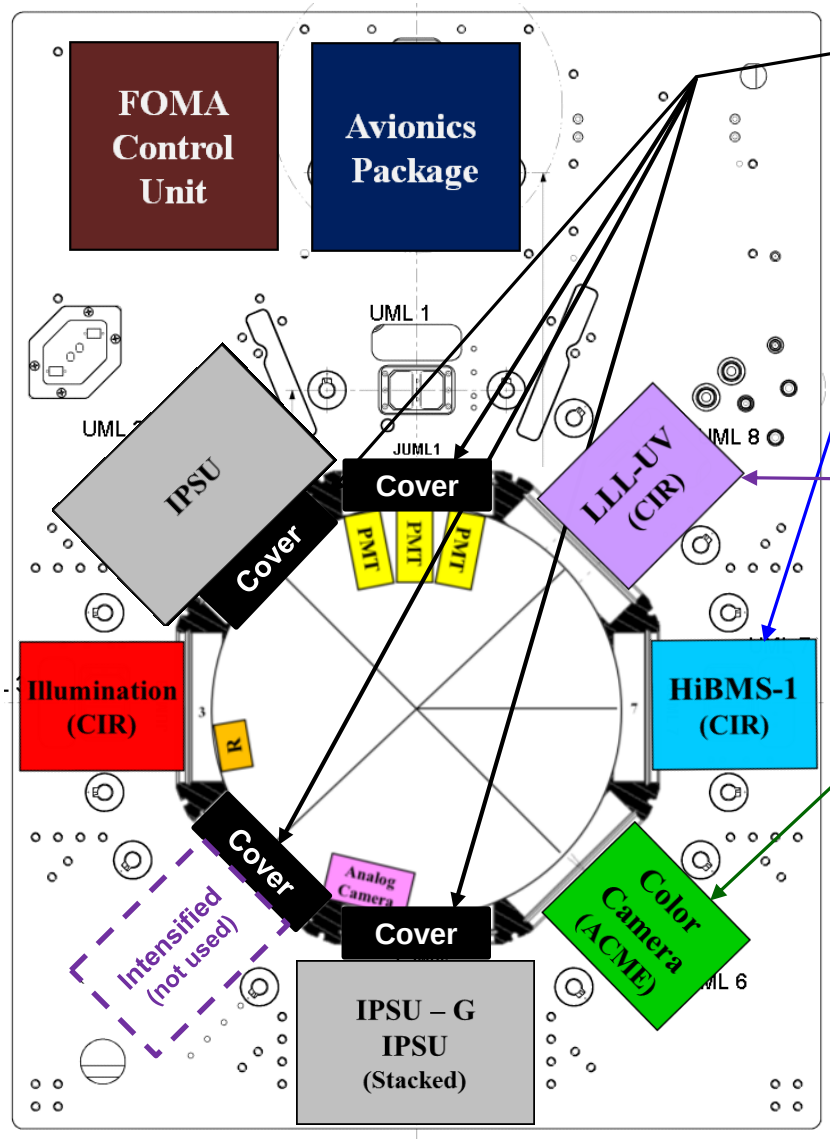

Window Blanks/Covers (non-reflective)
- Locations: UML1, UML2, UML4, UML5
- Installed from inside chamber
- Swap UML4/UML8 - Window/Blank

HiBMs Package
- w/ Illumination Package as Backlight
- Interfaces w/ IPSU
- Filter: Compensator 2 (Backlight λ)
- Relay Lens:
  - 30mm (Gasjet & CoFlow)
  - 50mm (Spherical & BRE)

LLL-UV Package
- Needs additional IPSU (old style) - UML2
- Relay Lens:
  - 80mm Fixed

ACME Color Camera Package
- Interfaces w/ IPSU-G (Gig-E)
- Motorized Zoom Lens & Filter Barrel

***IPSU-G & IPSU Stack**
- IPSU-G supports Intensified/ACME Color
- IPSU supports HiBMs/illumination

***IPSU at Corner**
- IPSU supports LLL-UV
  - Not on ISS – Flight fidelity at ZIN
  - only fits in UML2 (Cannot stack IPSUs)

***Intensified Package**
- Could be left at UML4 for stowage

ZIN Technologies