

COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	1	101005-4CL-0114	1/4" X 11.50" LG., HOSE ASSEMBLY, STRAIGHT-TO-90 DEG. ELBOW, 37 DEG. FLARE FITTING, 101 PTFE, LIGHTWEIGHT, STRATOFLEX
C2	2	SEC07N4	SEAL, CONICAL FLARED FITTING, 37 DEG, SECO
C3	2	51128-06-T04-VD	QUICK DISCONNECT COUPLER HALF, BODY SIZE 3/8", 304 & 17-4PH, HIGH PRESSURE, 1/4" FITTING END, PREECE
C4	A/R	MS20995C32	SAFETY WIRE, .032 DIA. STAINLESS STEEL
C5	A/R	1838 B/A GREEN	SCOTCHWELD EPOXY ADHESIVE
C6	A/R	P-224-1	TAPE, KAPTON, 1.00", PERMACELL
C7	1	SDG32107728-021	TOXICITY LABEL

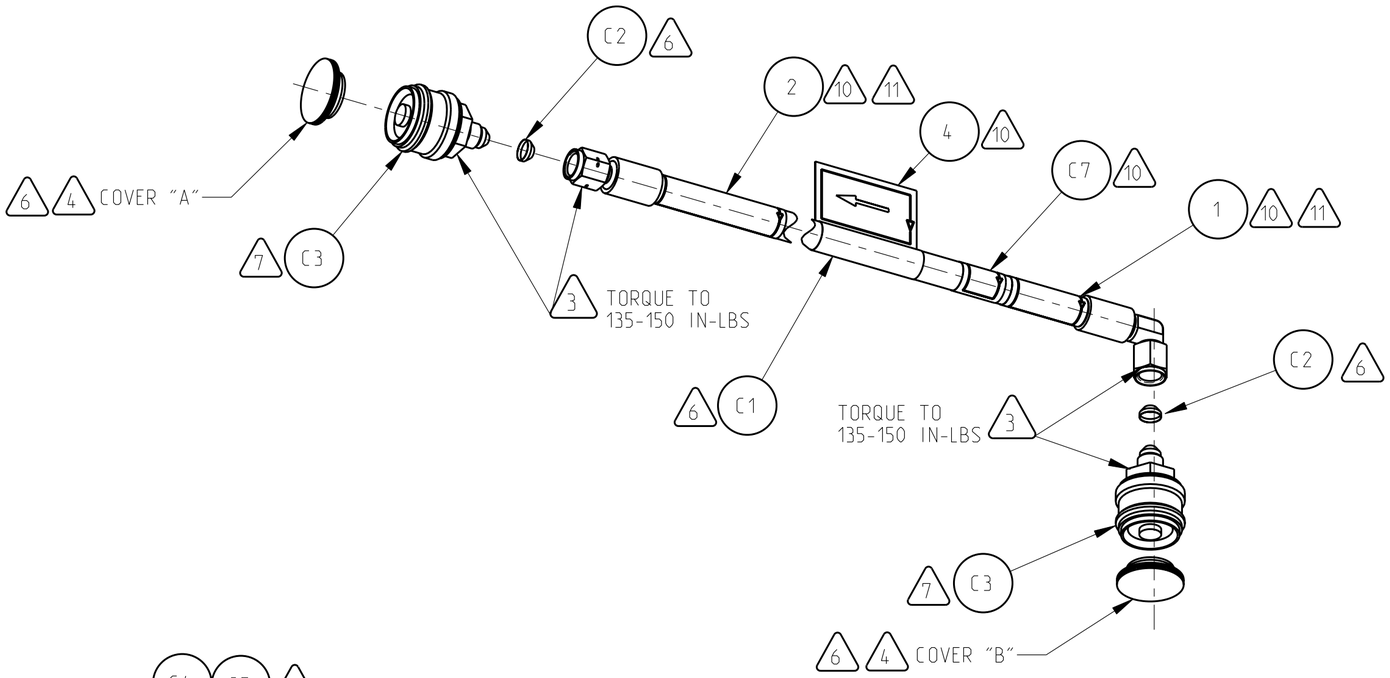

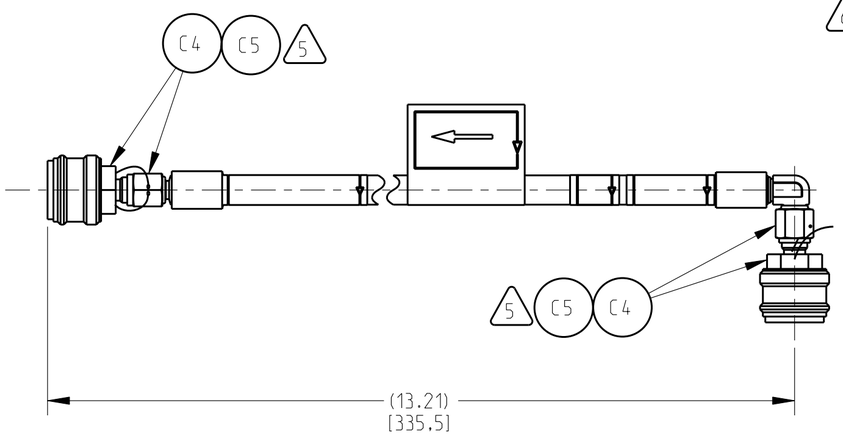

NOTE: SOME ITEMS REMOVED FOR CLARITY

NOTES:

1. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ASSEMBLE PER APPROVED PROCESS PLAN FOR INITIAL BUILD.
3. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING OR ASSEMBLY PROCEDURE.
4. REMOVE AND DISCARD LANYARD FROM BOTH QUICK DISCONNECTS (ITEMS C3) AND COVERS. INSTALL COVERS "A" AND "B" AND TAPE COVERS SECURELY USING USING KAPTON TAPE (ITEM C6). COVER "A" WILL BE REMOVED AND DISCARDED AT NEXT ASSEMBLY.
5. INSTALL SAFETY WIRE (ITEM C4) BETWEEN ITEMS C1 AND C3 ON BOTH ENDS OF HOSE ASSEMBLY PER NASM 33540. TO PREVENT SHARP EDGES, PIGTAIL MADE AT END OF WIRING SHALL BE BENT BACK OR UNDER AND COVERED WITH EPOXY (ITEM C5) FOLLOWING MANUFACTURER'S SPECIFICATIONS.
6. CLEAN ALL INTERNAL AND EXTERNAL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
7. CLEAN ALL EXTERNAL SURFACES ONLY WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
8. HANDLE WITH CLEAN, LINT-FREE GLOVES.
9. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
10. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.
11. IF REQUIRED, TRIM LABEL TO PREVENT OBSTRUCTION OF TEXT.

DRAWING LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	S1101MFT0402-01	HOSE END LABEL
2	1	S1101MFT0402-02	HOSE END LABEL
4	1	S1101MFT0402-XX	COMBO LABEL

REV	DESCRIPTION	APPROVED
A	INCORPORATED ACME-ECO-539 AND ACME-ECO-599	AD 6/6/16 JO 6/13/16 AR 6/13/16

REVISION HISTORY

S1101MFA0100
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E.MCCLOSKEY 6/13/16

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	K.RHODES 10/7/13	QUALITY	D.SEELEY 10/9/13
REVIEWER	M.AYNIK 10/10/13	MATERIALS	M.WILKINSON 10/8/13
MECHANICAL	A.DRAKE 10/7/13	PROJ LEAD	B.BOROWSKI 10/17/13
ELECTRICAL	T.GOBELI 10/9/13		
STRUCTURAL	C.WERNER 10/11/13		
SAFETY	W.BORRELLI 10/8/13		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
INERT HOSE ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101MFA0402	A

SCALE 1/2 | INITIAL REL DATE 10/17/13 | SHEET 1 OF 1

RELEASE LEVEL: WORKING
MODEL: S1101MFA0402

PRO/E VERSION: Wildfire 5.0

DWG NO S1101MFA0402 | SH 1 | REV A

ZIN_C_2012.frm