


COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	1	HPRVM6JCSSV120	RELIEF VALVE, 3/8 IN., 37 DEGREE FLARE, OXYGEN CLEAN, 120 PSIG. (GENERANT)
C2	1	6 AOEX6-SS-C3	ELBOW, SWIVEL, STRAIGHT THREAD CONNECTOR, SAE-ORB, 37 DEGREE SWIVEL, 300 SERIES SST, OXYGEN CLEANED. (PARKER)
C3	1	6 G5G5JG5-SS-C3	TEE, FEMALE STRAIGHT THREAD, SAE-ORB, OXYGEN CLEANED. (PARKER)
C4	1	942-06-2-T-06-V-D	QUICK-DISCONNECT, NIPPLE STYLE, 3/8 IN. MALE, 37 DEGREE, FLARED W/ FLUOROCARBON O-RINGS, W/DUST CAP, OXYGEN CLEANED. (PREECE INC.)
C5	1	51431-06-1XF06VD	QUICK-DISCONNECT, COUPLING, 37 DEGREE, FLARED, W/FLUORO-CARBON O-RINGS, W/DUST CAP, OXYGEN CLEANED. (PREECE INC.)
C6	2	SECO 7N 6L	SEAL, CONICAL, 37 DEGREE FLARE, NICKEL 3/8 IN. TUBE OD, LOX CLEANED. (SECO SEALS INC.)
C7	3	3-906 V1226-75	O-RING, .468 IN. ID X .078 IN. W
C8	1	6 PNTX-SS	PLUG, TRIPLE-LOK 37 DEGREE FLARE, JIC, SST (PARKER)
C9	1	67210MFDT30XXX	IMS LABEL
C10	A/R	240AC	KRYTOX 240AC, TYPE III LUBRICANT (DUPONT)


DRAWING LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	S1101MFT0405-XX	PART NUMBER LABEL
2	1	S1101MFT0405-03	"To CIR Manifold #3"
3	1	S1101MFT0405-04	"To CIR GN2 Hose"

TORQUE TABLE		
ITEM	TORQUE RANGE	UNITS
T1	165-190	IN-LBS

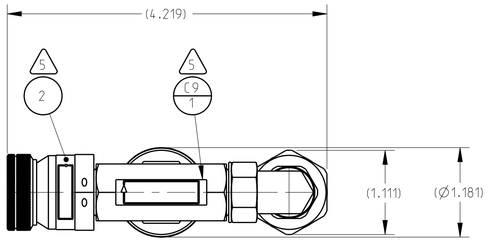

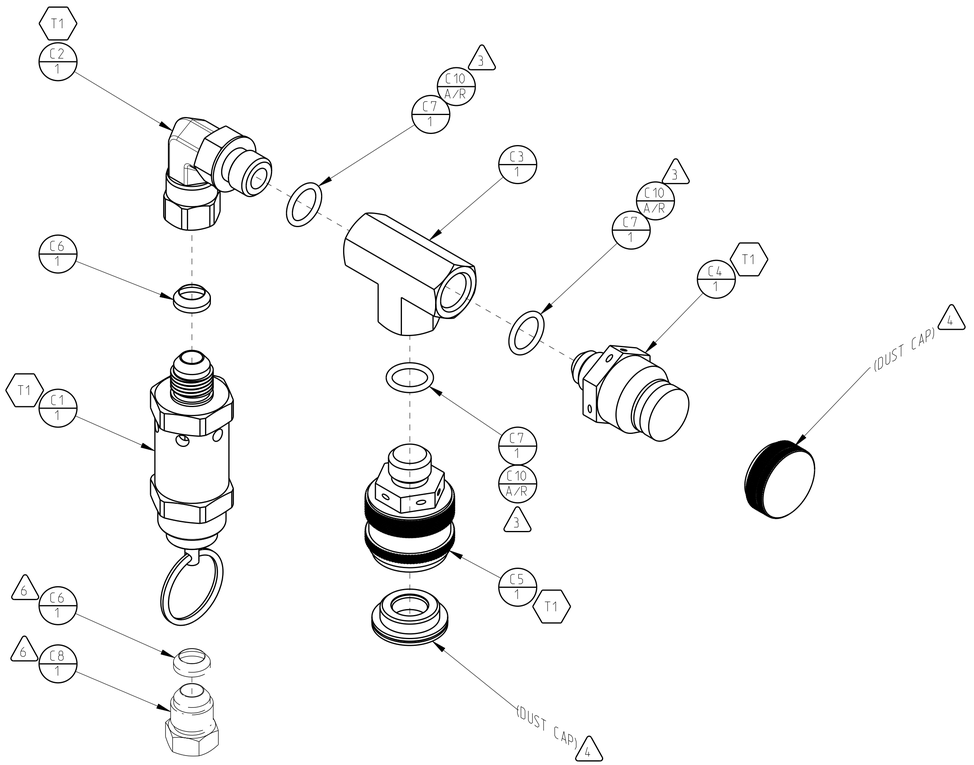

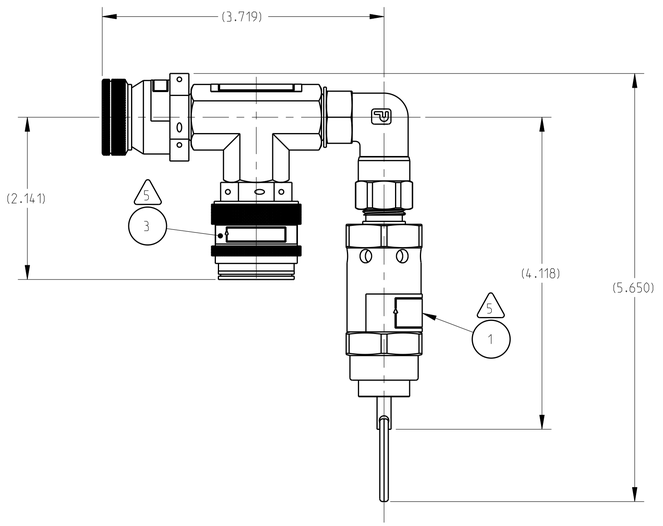

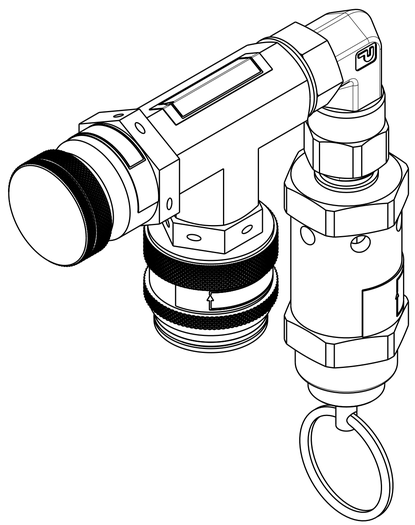

NOTES:

1. ASSEMBLE PER APPROVED PROCESS PLAN FOR INITIAL BUILD.
2. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
3. APPLY O-RING LUBRICANT, ITEM C10, PER ESTABLISHED PROCEDURES.
4. REMOVE AND DISCARD Q-D DUST CAP LANYARD.
5. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.
6. ITEMS C6 AND C8 ARE USED FOR PROOF PRESSURE TESTING IN PLACE OF ITEM C1. WHEN TESTING COMPLETE, RETURN ITEM C8 TO STORES AND DISCARD USED ITEM C6.
7. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
8. HANDLE WITH CLEAN, LINT-FREE GLOVES.
9. MDP = 120 PSIG (135 PSIA).
10. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

END ITEM
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
.X ± .03
.XX ± .01
.XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL. DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: *E. McCLOSKEY 03/14/2016*
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	*M. AYNIK 03/03/2016*	QUALITY	*L. WRIGHT 03/10/2016*
REVIEWER	*D. VACHON 03/04/2016*	MATERIALS	*M. WILKINSON 03/03/2016*
MECHANICAL	*A. DRAKE 03/03/2016*	PROJ LEAD	*B. BOROWSKI 03/14/2016*
ELECTRICAL	*T. GOBELI 03/11/2016*	SR. ENGR.	*D. VANZANDT 03/10/2016*
STRUCTURAL	*C. WERNER 03/14/2016*		
SAFETY	*W. BORRELLI 03/04/2016*		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

REV	DESCRIPTION	APPROVED

REVISION HISTORY

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
GN2 RELIEF VALVE ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA0405	-

SCALE 1/1 | INITIAL REL DATE 03/14/2016 | SHEET 1 OF 2

RELEASE LEVEL: RELEASED
MODEL: S1101MFA0405

PRO/E VERSION: Creo 2.0

DWG NO S1101MFA0405 | SH 1 | REV -

ZIN_D_2012.frm

ITEM NO.	PART NUMBER	MANUFACTURER	DESCRIPTION	FLUID MEDIUM	MOP (PSIG)	MDP (PSIG)	BURST	SAFETY FACTOR
C1	HPRVM6JCSSV120	GENERANT	RELIEF VALVE. 3/8 IN.. 37 DEGREE FLARE. OXYGEN CLEAN. 120 PSIG	NITROGEN	120	2400	5000	20.0
C2	6 AOEX6-SS-C3	PARKER	ELBOW. SWIVEL. STRAIGHT THREAD CONNECTOR. SAE-ORB. 37 DEGREE SWIVEL. 300 SERIES SST. OXYGEN CLEANED	NITROGEN	120	5000		41.7
C3	6 G5G5JG5-SS-C3	PARKER	TEE. FEMALE STRAIGHT THREAD. SAE-ORB. OXYGEN CLEANED	NITROGEN	120	3000		25.0
C4	942-06-2-T-06-V-D	PREECE INC.	QUICK-DISCONNECT. NIPPLE STYLE. 3/8 IN. MALE. 37 DEGREE. FLARED W/ FLUOROCARBON O-RINGS. W/DUST CAP. OXYGEN CLEANED	NITROGEN	120	3000	7600	25.0
C5	51431-06-1XF06VD	PREECE INC.	QUICK-DISCONNECT. COUPLING. 37 DEGREE. FLARED. W/FLUORO-CARBON O-RINGS. W/DUST CAP. OXYGEN CLEANED	NITROGEN	120	5000	7600	41.7
C6	SECO 7N 6L	SECO SEALS INC.	SEAL. CONICAL. 37 DEGREE FLARE. NICKEL 3/8 IN. TUBE OD. LOX CLEANED	NITROGEN	120			
C7	3-906 V1226-75		O-RING. .468 IN. ID X .078 IN. W	NITROGEN	120			
C8	6 PNTX-SS	PARKER	PLUG. TRIPLE-LOK 37 DEGREE FLARE. JIC. SST	NITROGEN	120	7200		60.0

NOTES:

1. SEE SHEET 1 FOR ADDITIONAL INFORMATION. GENERAL NOTES AND TOLERANCES.

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA0405	-
SCALE 1/1	INITIAL REL DATE 03/14/2016	SHEET 2 OF 2	

PRO/E VERSION: Creo 2.0

DWG NO S1101MFA0405 | SH 2 | REV -

ZIN_D_2012.frm