
DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	2	S1101EFA1410	ANALOG CAMERA LED BOARD ASSEMBLY
2	1	S1101MFA1407	ANALOG CAMERA LED HOUSING ASSEMBLY
3	1	S1101MFD1409	ANALOG CAMERA LED HOUSING COVER

COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
C1	4	S293-M04-F02-C	UNTHREADED ROUND SPACER, CLEAR ANODIZED ALUMINUM, .188 OD X .089 ID X .250 LG, UNICORP
C2	3	NAS1101E02-4	SCREW, MACHINE-FLAT FILLISTER HEAD .086-56 UNJC-3A X .250 LENGTH
C3	4	NAS1101E02-8	SCREW, MACHINE-FLAT FILLISTER HEAD .086-56 UNJC-3A X .500 LENGTH
C4	3	NAS620C2	#2 FLAT WASHER REDUCED OUTER DIAMETER
C5	4	90295A320	#02 WASHER, NYLON, .188" OD. X .094 ID X .02 THK McMASTER-CARR

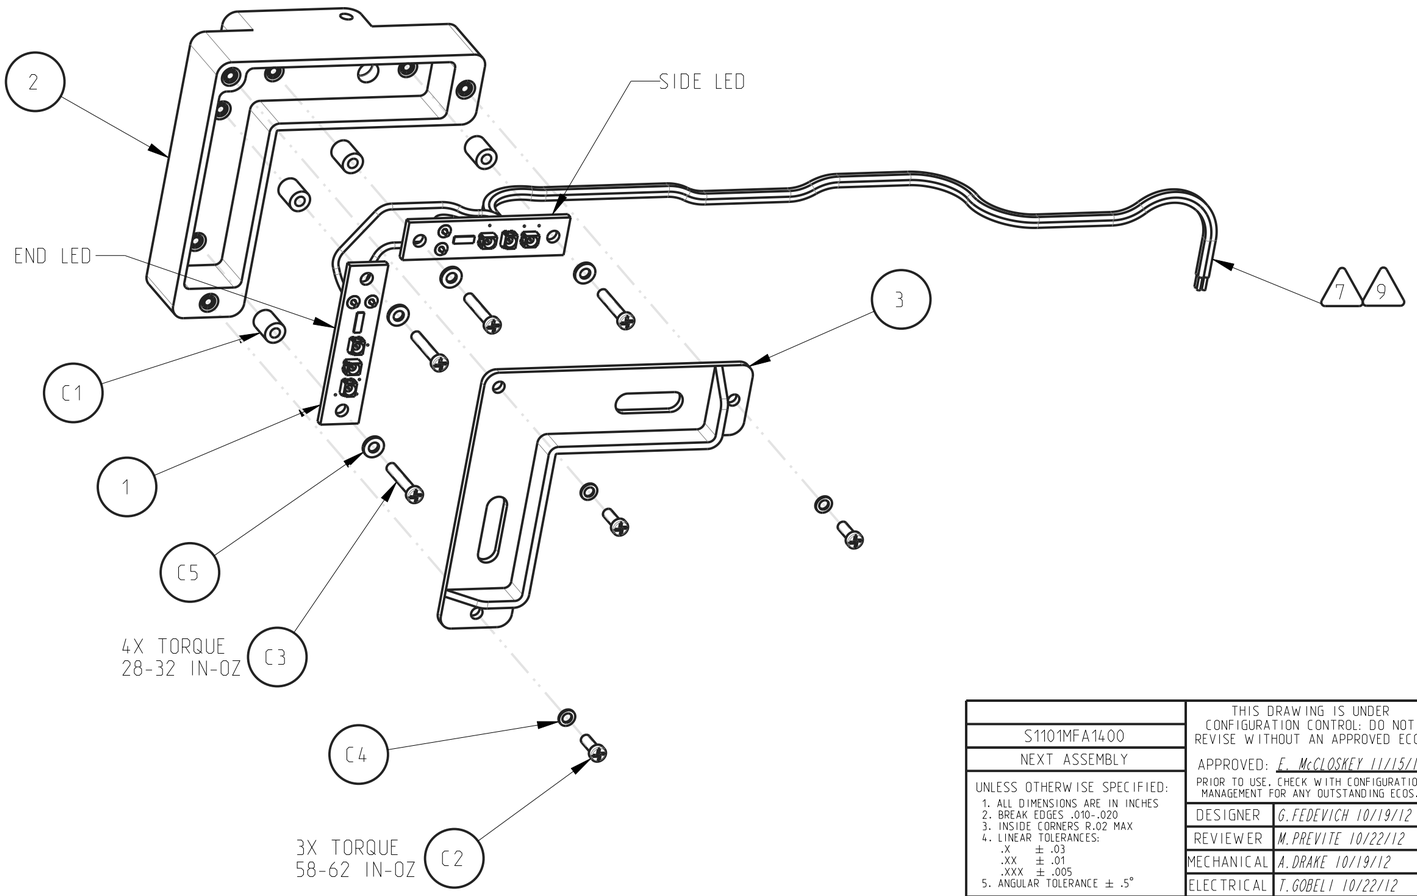

NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. CHROMATE CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3. (GOLD COLOR)
4. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
5. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
6. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING.
7. APPLY TEMPORARY LABELS TO WIRE ENDS "END LED" AND "SIDE LED".
8. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW PER SAE-AS478, METHOD 35D.
9. CHECK FOR ISOLATION TO STRUCTURE ON ALL WIRES.

REV	DESCRIPTION	APPROVED
A	INCORPORATED ACME-ECO-559.	LF 11/10/16 AK 11/14/16 AD 11/14/16

REVISION HISTORY

DWG NO S1101MFA1406 SH 1 REV A

S1101MFA1400
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E. McCLOSKEY 11/15/16

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	G.FEDEVICH 10/19/12	QUALITY	D.SEELEY 10/26/12
REVIEWER	M.PREVITE 10/22/12	MATERIALS	M.WILKINSON 10/23/12
MECHANICAL	A.DRAKE 10/19/12	PROJ LEAD	B.BOROWSKI 10/29/12
ELECTRICAL	T.GOBELI 10/22/12		
STRUCTURAL	C.WERNER 10/29/12		
SAFETY	W.BORRELLI 10/26/12		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE

ANALOG CAMERA LED ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101MFA1406	A

SCALE 1/1 | INITIAL REL DATE 10/29/2012 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL: S1101MFA1406

PRO/E VERSION: Wildfire 2.0

ZIN_C.frm