
COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION	MANUFACTURER
C1	1	D38999/26FC35SN	CONNECTOR, RECEPTACLE, 22 POS.	QPL
C2	1	440HS143XM1307B	BACKSHELL, STRAIGHT	QPL
C3	A/R	M39029/56-348	CONTACT, SOCKET, SIZE 22D, AWG 22-28	QPL
C4	1	SND15S1000G	CONNECTOR, D-SUB, FEMALE, 15 POS	POSITRONIC
C5	1	557-398UC2B	BACKSHELL, D-SUB, SIZE 2	GLENAIR
C6	A/R	FC6020M2	CONTACT, SOCKET, SIZE 20, AWG 20-24	POSITRONIC
C7	1	805-004-02UC8-6SA	CONNECTOR, RECEPTACLE, 6 POS.	GLENAIR
C8	1	380MS135UC1104-6	BACKSHELL, STRAIGHT	GLENAIR
C9	A/R	809-002	CONTACT, SOCKET, SIZE 23, AWG 22-28	GLENAIR
C10	1	SND9S1000G	CONNECTOR, D-SUB, FEMALE, 9 POS	POSITRONIC
C11	1	557-398UC1B	BACKSHELL, D-SUB, SIZE 1	GLENAIR
C12	4	687-316M	SOCKET HEAD W/C CLIP JACKSCREW	GLENAIR
C13	A/R	M22759/11-22-0	1/C, 22 AWG, PTFE INSULATED, BLACK	QPL
C14	A/R	M22759/11-22-2	1/C, 22 AWG, PTFE INSULATED, RED	QPL
C15	A/R	M22759/11-22-4	1/C, 22 AWG, PTFE INSULATED, YELLOW	QPL
C16	A/R	M22759/11-22-9	1/C, 22 AWG, PTFE INSULATED, WHITE	QPL
C17	A/R	M27500-24RC2S06	2/C, 24 AWG, TWISTED PAIR, SHLD	QPL
C18	A/R	M27500-24RC3S06	3/C, 24 AWG, TWISTED PAIR, SHLD	QPL
C19	A/R	M27500-22RC1S06	1/C, 22 AWG, SHLD	QPL
C20	A/R	2172	COPPER BRAID, 3/8"	ALPHA
C21	A/R	5011000632S	EXPANDABLE SLEEVING, 1/4"	BENTLEY HARRIS
C22	A/R	5011001332S	EXPANDABLE SLEEVING, 1/2"	BENTLEY HARRIS
C23	2	600-057	BACKSHELL MICRO BAND	GLENAIR
C24	3	PLT1M-C702Y	CABLE TIE, 4", HALAR FLUOROPOLYMER	PANDUIT
C25	A/R	2216 B/A GRAY	EPOXY, 2 PART	3M
C26	A/R	M23053/13-003	SHRINK TUBING, 3/8"	QPL
C27	A/R	7649	PRIMER N	LOCTITE
C28	A/R	222MS	THREADLOCKER	LOCTITE
C29	A/R	P-224-1/2	TAPE, KAPTON 1/2" WIDE	PERMACEL
C30	A/R	2-6-1181	COPPER TAPE, 2"	

LABEL LIST	
ITEM	INSCRIPTION
L1	P18
L2	P100
L3	P11
L4	J104
L5	S1101EFA0310 SN xxxx

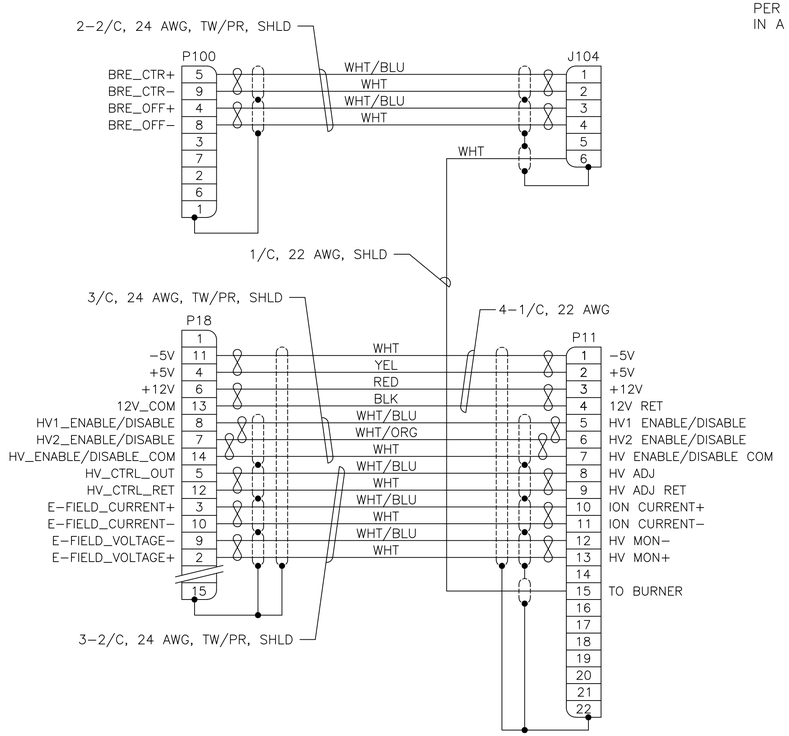

SCHEMATIC

14. TEST PER NASA-STD-8739.4 PARA 18.2.6 USING THE FOLLOWING:

    CONTINUITY: ≤ 5 OHMS

    DWV: VOLTAGE 750VAC
    CURRENT: < 1 MILLIAMP
    DURATION: < 1 MINUTE

    IR: VOLTAGE: 500VDC ±50VDC
    FOR P11, P18, P100
    RESISTANCE: > 100 MEG OHMS
    DURATION: < 1 MINUTE

15. PLACE COMPLETED ASSEMBLY IN CLEAN, STATIC-SHIELDING PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/STATEMENT OF WORK PER SAE AS478, METHOD 35D. STORE IN A PROJECT APPROVED STORAGE AREA.

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. HARNESS ASSEMBLY AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.4 AND FOLLOWING NOTE:
   a. WIRE TWIST SHALL BE BETWEEN 8 AND 16 TIMES THE OUTER DIAMETER OF THE HARNESS UNLESS OTHERWISE NOTED. (FROM NASA-STD-8739.4 PARA 7.3.20)
   b. ALL SHIELD TERMINATIONS ARE INTERFERENCE SENSITIVE.
   c. USE COPPER TAPE (ITEM C30) TO SECURE SINGLE CONDUCTOR SHIELD BRAID (ITEM C19) TO OVERALL SHIELD (ITEM C20).
5. FOR TENSILE PULLS SEE TENSILE PULL STRENGTH LIST. TENSILE PULL STRENGTHS PER NASA-STD-8739.4 AND/OR THE MANUFACTURER'S SPECIFICATIONS.
6. TERMINATE SHIELDS INTO BACKSHELL PER MANUFACTURER'S SPECIFICATION.
7. INSTALL CONTACTS IN ALL UNUSED POSITIONS OF D-SUB AND CIRCULAR CONNECTORS.
8. PERFORM CONTACT RETENTION TEST PER NASA-STD-8739.4 AND/OR THE MANUFACTURE'S SPECIFICATIONS. CONTACTS REQUIRING A PULL TEST FOR RETENTION SHALL BE PERFORMED AS FOLLOWS: A GENTLE PULL ON THE WIRE SHALL BE USED TO DETERMINE IF THE CONTACT IS SEATED PROPERLY.
9. TORQUE BACKSHELL (ITEM C2) TO 40 ±5 IN-LBS AND BACKSHELL (ITEM C8) TO 22 ±2 IN-LBS. STAKE WITH EPOXY (ITEM C25).
10. APPLY EPOXY (ITEM C25) TO SHARP EDGE OF MICRO BAND (ITEM C23).
11. TO SAFELY SECURE CABLE IN STRAIN RELIEF INCREASE THE CABLE DIAMETER USING HEAT SHRINK TUBING (ITEM C26). MAXIMUM OF TWO (2) LAYERS.
12. TRIM FASTENERS ON STRAIN RELIEF TO EXPOSE 1-2 THREADS. APPLY PRIMER N (ITEM C27) AND THREADLOCKER 222MS (ITEM C28), TORQUE FASTENERS PER CHART. APPLY EPOXY (ITEM C25) TO EXPOSED THREADS.
13. APPLY TEMPORARY CABLE IDENTIFICATION LABELS P/N TZE-211.

    NOTE: TO BE REMOVED AT INSTALLATION INTO FINAL ASSEMBLY.

CRIMP TOOL LIST				
CONTACT P/N	CRIMP TOOL	POSITIONER	I/E TOOL	REF. DES.
FC6020M2	M22520/2-01	M22520/2-08	M81969/1-02	P100, P18
M39029/56-348	M22520/2-01	M22520/2-07	M81969/14-01	P11
809-002	M22520/2-01	K1461	809-088	J104

TENSILE PULL STRENGTH LIST			
MANUFACTURER	CONTACT P/N	WIRE AWG	LBS
POSITRONIC	FC6020M2	24/22	8/12
QPL	M39029/56-348	24/22	8/13
GLENAIR	809-002	24/22	8/12

BACKSHELL CLAMPING TORQUE TABLE		
SCREW SIZE	TORQUE RANGE	UNITS
2-56	2 ±0.5	IN-LB
4-40	4 ±0.5	IN-LB
6-32	6 ±1.0	IN-LB
8-32	8 ±1.0	IN-LB
10-32	10 ±1.0	IN-LB
.250-20	12 ±1.0	IN-LB

REV	DESCRIPTION	APPROVED
C	REVISED PER ACME-ECO-515.	MH 9/17/15 TG 9/21/15 DS 9/22/15
B	REVISED PER ACME-ECO-453.	MH 4/14/15 TG 4/15/15 DS 4/15/15
A	REVISED PER ACME-ECO-322.	MH 3/25/15 TG 3/25/15 DS 3/26/15

REVISION HISTORY

S1101MFA0100
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL; DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: E. McCLOSKEY 9/22/15
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	M. HOMKO 4/29/14	QUALITY	D. SEELEY 5/1/14
REVIEWER	J. BRUEWER 5/1/14	MATERIALS	M. WILKINSON 4/29/14
MECHANICAL	A. DRAKE 4/29/14	PROJ LEAD	B. BOROWSKI 5/2/14
ELECTRICAL	T. GOBELI 4/29/14	ENGINEER	M. SAVINA 4/29/14
STRUCTURAL	C. WERNER 4/29/14	REVIEWER	K. RHODES 4/29/14
SAFETY	W. BORRELLI 4/29/14		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
E-FIELD POWER SUPPLY TO RELAY BOARD AND BURNER HARNESS ASSEMBLY


SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101EFA0310	C

SCALE NONE | INITIAL REL DATE 05/05/14 | SHEET 1 OF 2

RELEASE LEVEL: RELEASED
MODEL NAME: S1101EFA0310_REV_C.DWG

AutoCAD 2012

DWG NO S1101EFA0310 | SH 1 | REV C

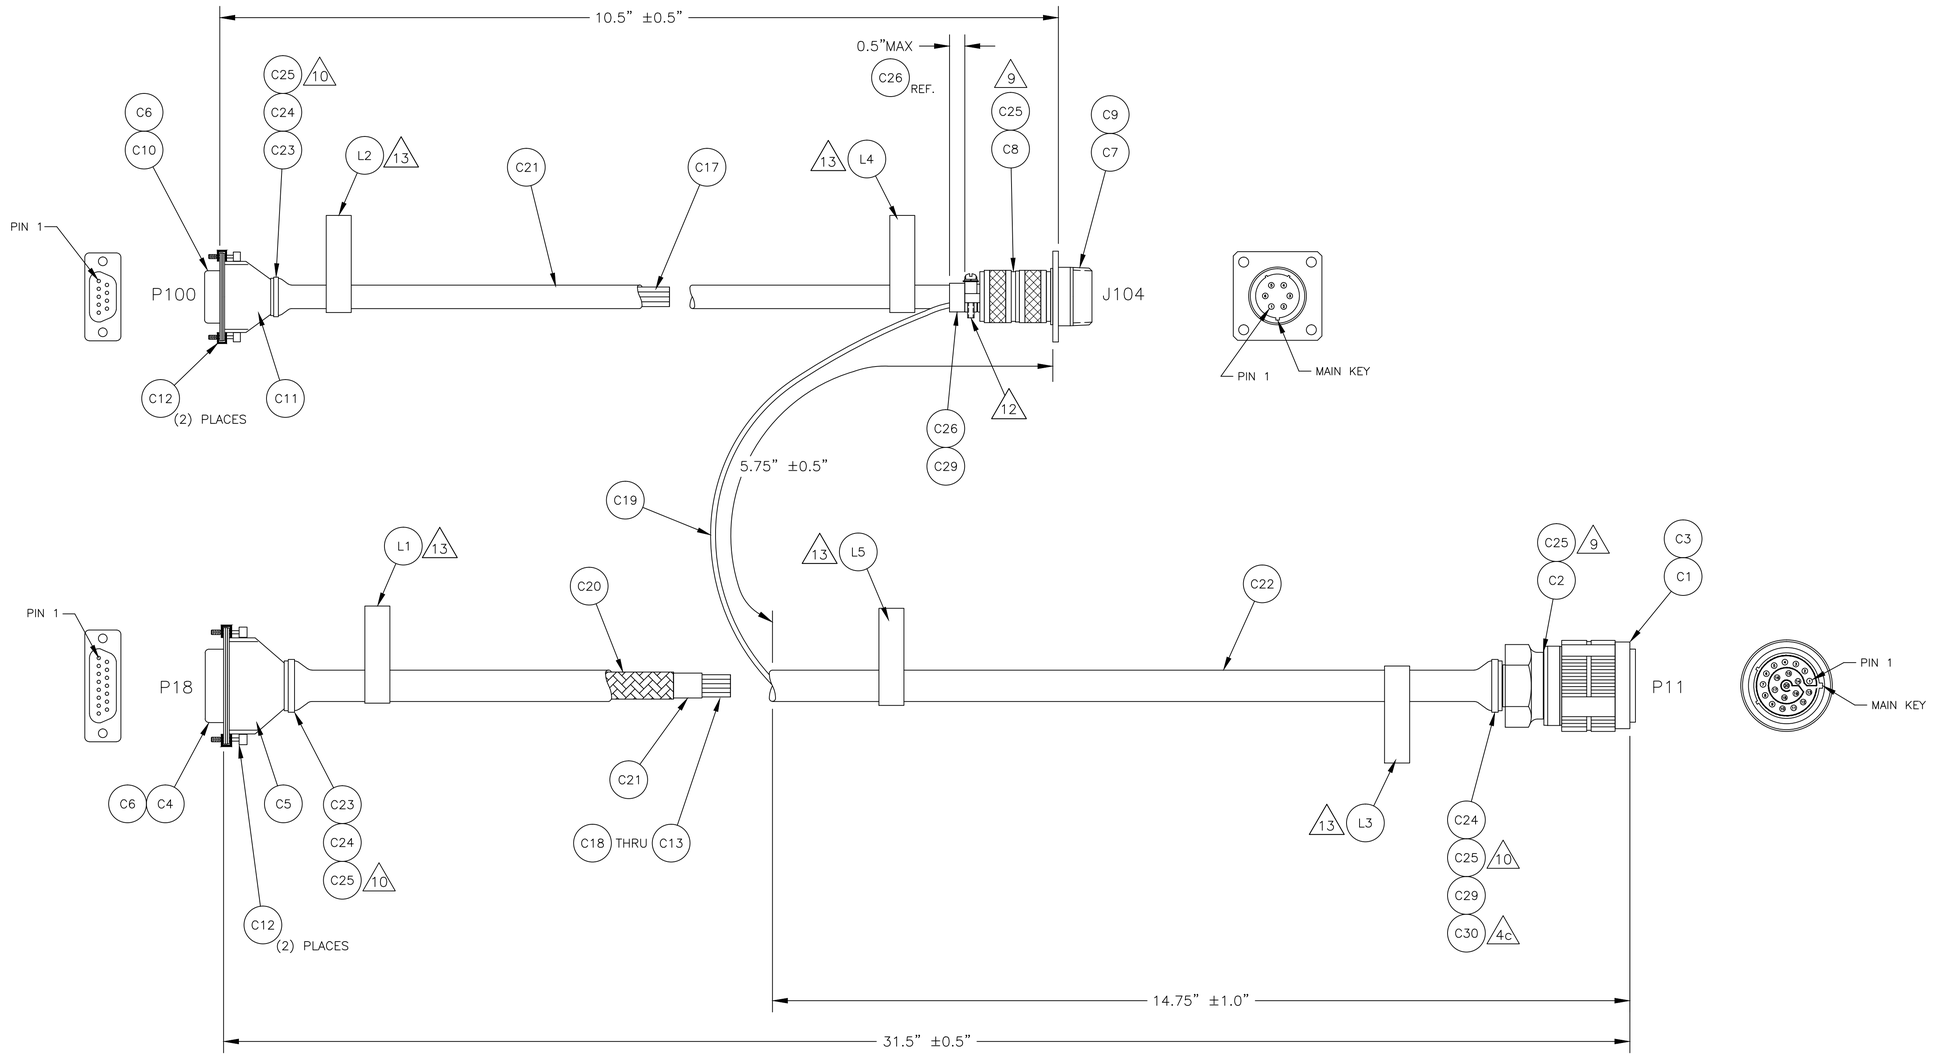

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101EFA0310	C
SCALE NONE	INITIAL REL DATE 05/05/14	SHEET 2 OF 2	

DWG NO S1101EFA0310 SH 2 REV C

AutoCAD 2012