

DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION	
1	1	S1101EFA2333	FILTER ENCLOSURE HARNESS ASSEMBLY	
2	1	S1101MFA2301	FILTER ENCLOSURE LOWER HOUSING ASSEMBLY	
3	1	S1101MFA2303	FILTER ENCLOSURE UPPER HOUSING ASSEMBLY	
4	1	S1101MFA2309	FILTER ENCLOSURE WINDOW COVER ASSEMBLY	
5	1	S1101MFA2314	FILTER BARREL WITH INSERTS	
6	1	S1101MFA2316	BLUE FILTER ASSEMBLY	12
7	1	S1101MFA2317	CLEAR FILTER ASSEMBLY	12
8	1	S1101MFA2321	FILTER BARREL GEAR ASSEMBLY	
9	1	S1101MFA2325	DATA CAMERA MIRROR ASSEMBLY	12
10	1	S1101MFA2331	FILTER MOTOR ASSEMBLY	
11	1	S1101MFA2337	FILTER ENCLOSURE WINDOW ASSEMBLY	12
12	1	S1101MFD2306	FILTER ENCLOSURE REAR CAP	
13	1	67212MFAN21110	FORMALDEHYDE FILTER ASSEMBLY	12
14	1	67212MFAN21100	CH FILTER ASSEMBLY	12

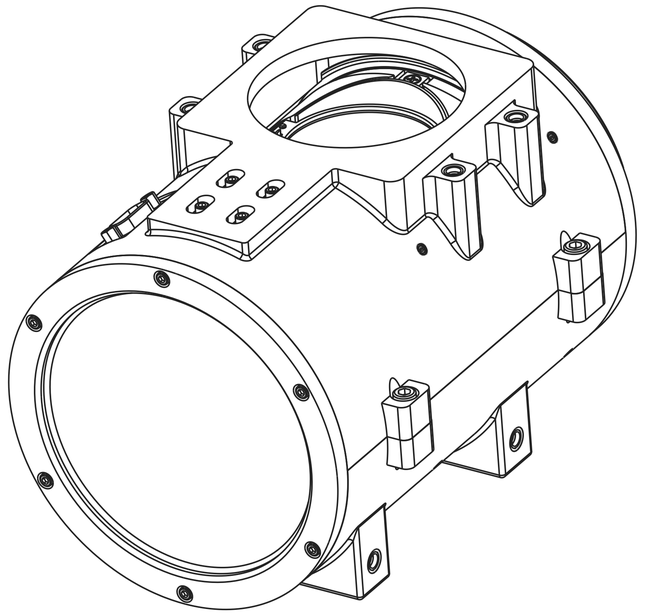

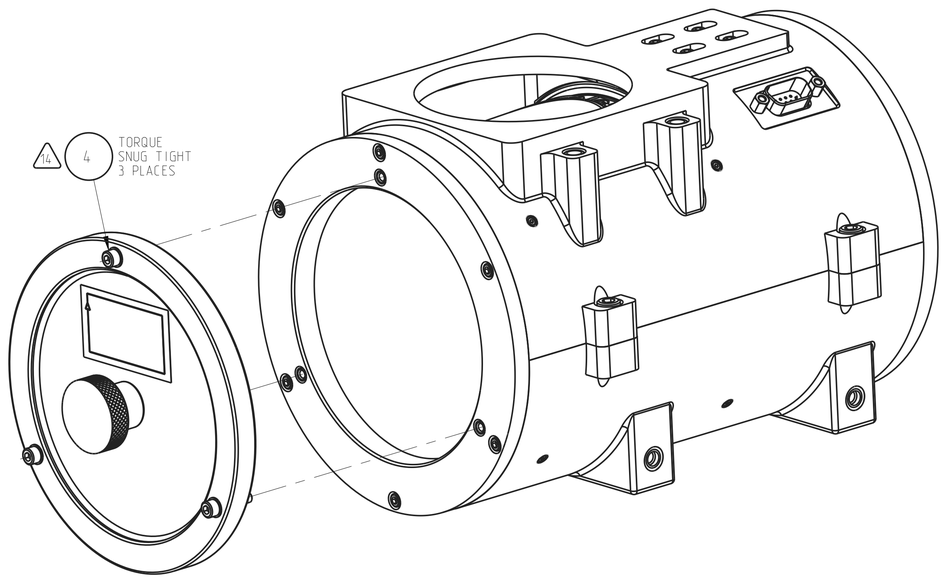

COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
C1	-	DELETED	DELETED
C2	2	JAX103-M09-F09-440	JACK SCREW, #4-40 X .312 LG. THREAD 303 STAINLESS STEEL. PASSIVATED. UNICORP INC.
C3	1	NAS1081C4B3	.250-28 UNJF-3A X .188 HEX SOCKET SETSCREW CRES. PASSIVATED. CUP POINT
C4	8	NAS1102E04-5	.112-40 UNJC-3A X .312", 100° FLAT HEAD. OFFSET CRUCIFORM MACHINE SCREW
C5	10	NAS1102E04-8	.112-40 UNJC-3A X .500", 100° FLAT HEAD. OFFSET CRUCIFORM MACHINE SCREW
C6	8	MS51045-10	.112-40 UNJC-3A X .188 HEX SOCKET SETSCREW HALF-DOG POINT. CRES. PASSIVATED.
C7	16	NAS1352N04-6	SCREW, CAP, SOCKET HEAD, A286, PASSIVATED .1120-40 UNRC-3A X .375
C8	4	NAS1351N3-12	SCREW, CAP, SOCKET HEAD, A286, PASSIVATED .1900-32 UNRF-3A X .750
C9	4	NAS620C10	FLAT WASHER, REDUCED OUTSIDE DIAMETER NO. 10 (.1900), .063 THICK, CRES
C10	16	NAS620C4L	FLAT WASHER, REDUCED OUTSIDE DIAMETER NO. 4 (.1120), .016 THICK, CRES
C11	2	JA042CP0	DOUBLE SEALED BEARING, JA SERIES, TYPE C RADIAL CONTACT, KAYDON CORP.
C12	A/R	222MS	LOCTITE 222MS THREAD LOCKER
C13	1	TC105	CABLE TIE MOUNTING BASE, ALUMINUM, THOMAS & BETTS
C14	A/R	2216 B/A	2216 B/A GRAY EPOXY 3M SCOTCH WELD EPOXY
C15	A/R	PLT1M-M702Y	CABLE TIE, HALAR FLUOROPOLYMER, PANDUIT CORP.

NOTES:

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. APPLY THREAD LOCKING COMPOUND PER ESTABLISHED PROCEDURES.
4. TORQUE VALUES SHOWN ARE EFFECTIVE TORQUES ONLY. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE VALUES TO DETERMINE THE TOTAL TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING.
5. DRIVE GEAR AND MATING RING GEAR SHOULD BE ALIGNED CENTER TO CENTER AS CLOSE AS POSSIBLE AND MESH FULLY. APPLY THREAD LOCKING COMPOUND (ITEM C12) TO INDICATED SET SCREWS ON MOTOR ASSEMBLY (ITEM 10) AFTER GEAR POSITION IS SET PRIOR TO INSTALLING SETSCREW (ITEM C3).
6. REFER TO DRAWING S1101EFA2333 FOR WIRING INTER-CONNECTION.
7. VERIFY GEAR AND MAGNET ARE ORIENTED AS SHOWN PRIOR TO ASSEMBLY.
8. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
9. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
10. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
11. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
12. HANDLE AND CLEAN OPTICAL COMPONENTS, AS NECESSARY, PER ESTABLISHED PROCEDURES.
13. DISCARD SUPPLIED WASHERS AND NUT FOR ITEM C2.
14. FASTENERS WILL BE TORQUED AT A LATER STAGE OF ASSEMBLY.

REV	DESCRIPTION	APPROVED
D	INCORPORATED ACME-ECO-468 AND ACME-ECO-563	LF 12/06/16 AD 12/07/16 JO 12/12/16
C	INCORPORATED ACME-ECO-415	GF 02/02/15 KR 02/02/15 AD 02/04/15
B	INCORPORATED ACME-ECO-267	GF 01/24/14 KR 01/27/14 AD 01/24/14
A	INCORPORATED ACME-ECO-205.	MA 09/04/13 KR 09/05/13 AD 09/04/13

REVISION HISTORY

S1101MFA2000
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .01
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL; DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: Z. McCLOSKEY 12/13/2016
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	M. AYNIK 11/13/12	QUALITY	D. SEELEY 11/27/12
REVIEWER	M. PREVITE 11/16/12	MATERIALS	M. WILKINSON 11/14/12
MECHANICAL	A. DRAKE 11/14/12	PROJ LEAD	B. BOROWSKI 12/11/12
ELECTRICAL	T. GOBELI 11/14/12		
STRUCTURAL	C. WERNER 12/10/12		
SAFETY	W. BORRELLI 11/14/12		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE 110

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
FILTER BARREL ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA2300	D

SCALE 1/1 | INITIAL REL DATE 12/17/2012 | SHEET 1 OF 3

RELEASE LEVEL: RELEASED
MODEL: S1101MFA2300


PRO/E VERSION: Wildfire 2.0

DWG NO S1101MFA2300 | SH 1 | REV D

ZIN_D_2012.frm

NOTES:

1. SEE SHEET 1 FOR ADDITIONAL INFORMATION. GENERAL NOTES AND TOLERANCES.

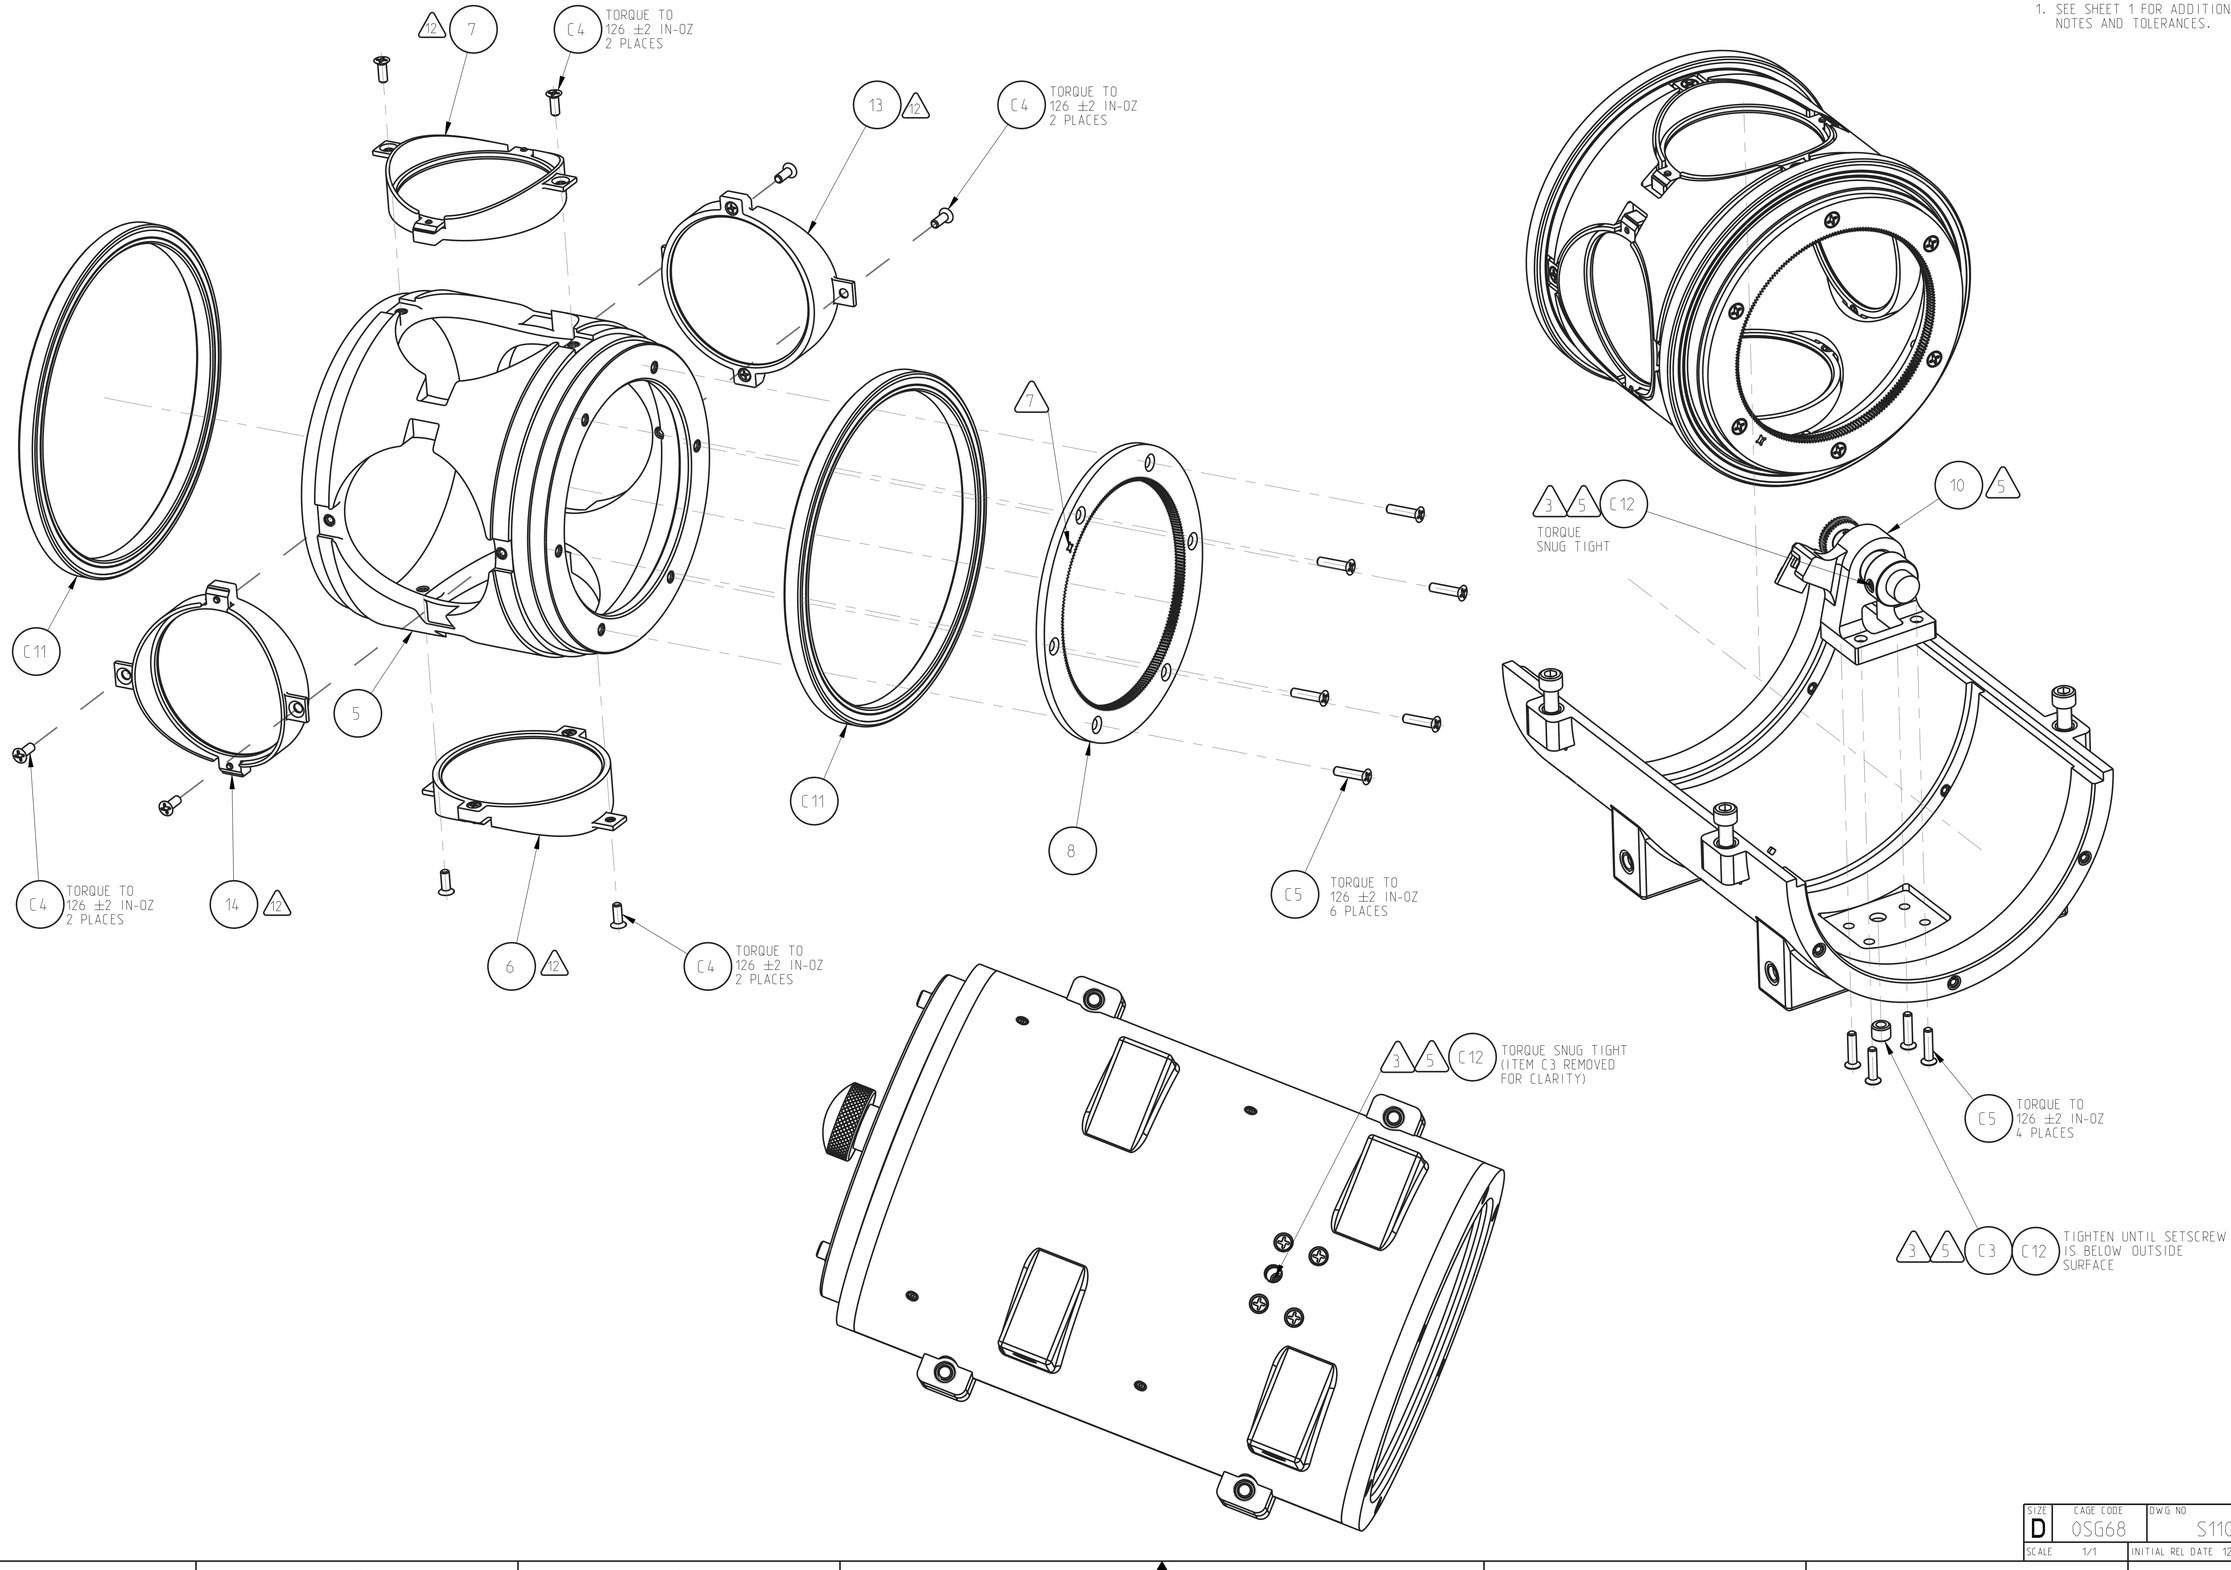

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA2300	D
SCALE 1/1		INITIAL REL DATE 12/17/2012 SHEET 2 OF 3	


PRO/E VERSION: Wildfire 2.0


ZIN_D_2012.frm

REV D | SH 2 | DWG NO S1101MFA2300

NOTES:

1. SEE SHEET 1 FOR ADDITIONAL INFORMATION. GENERAL NOTES AND TOLERANCES.

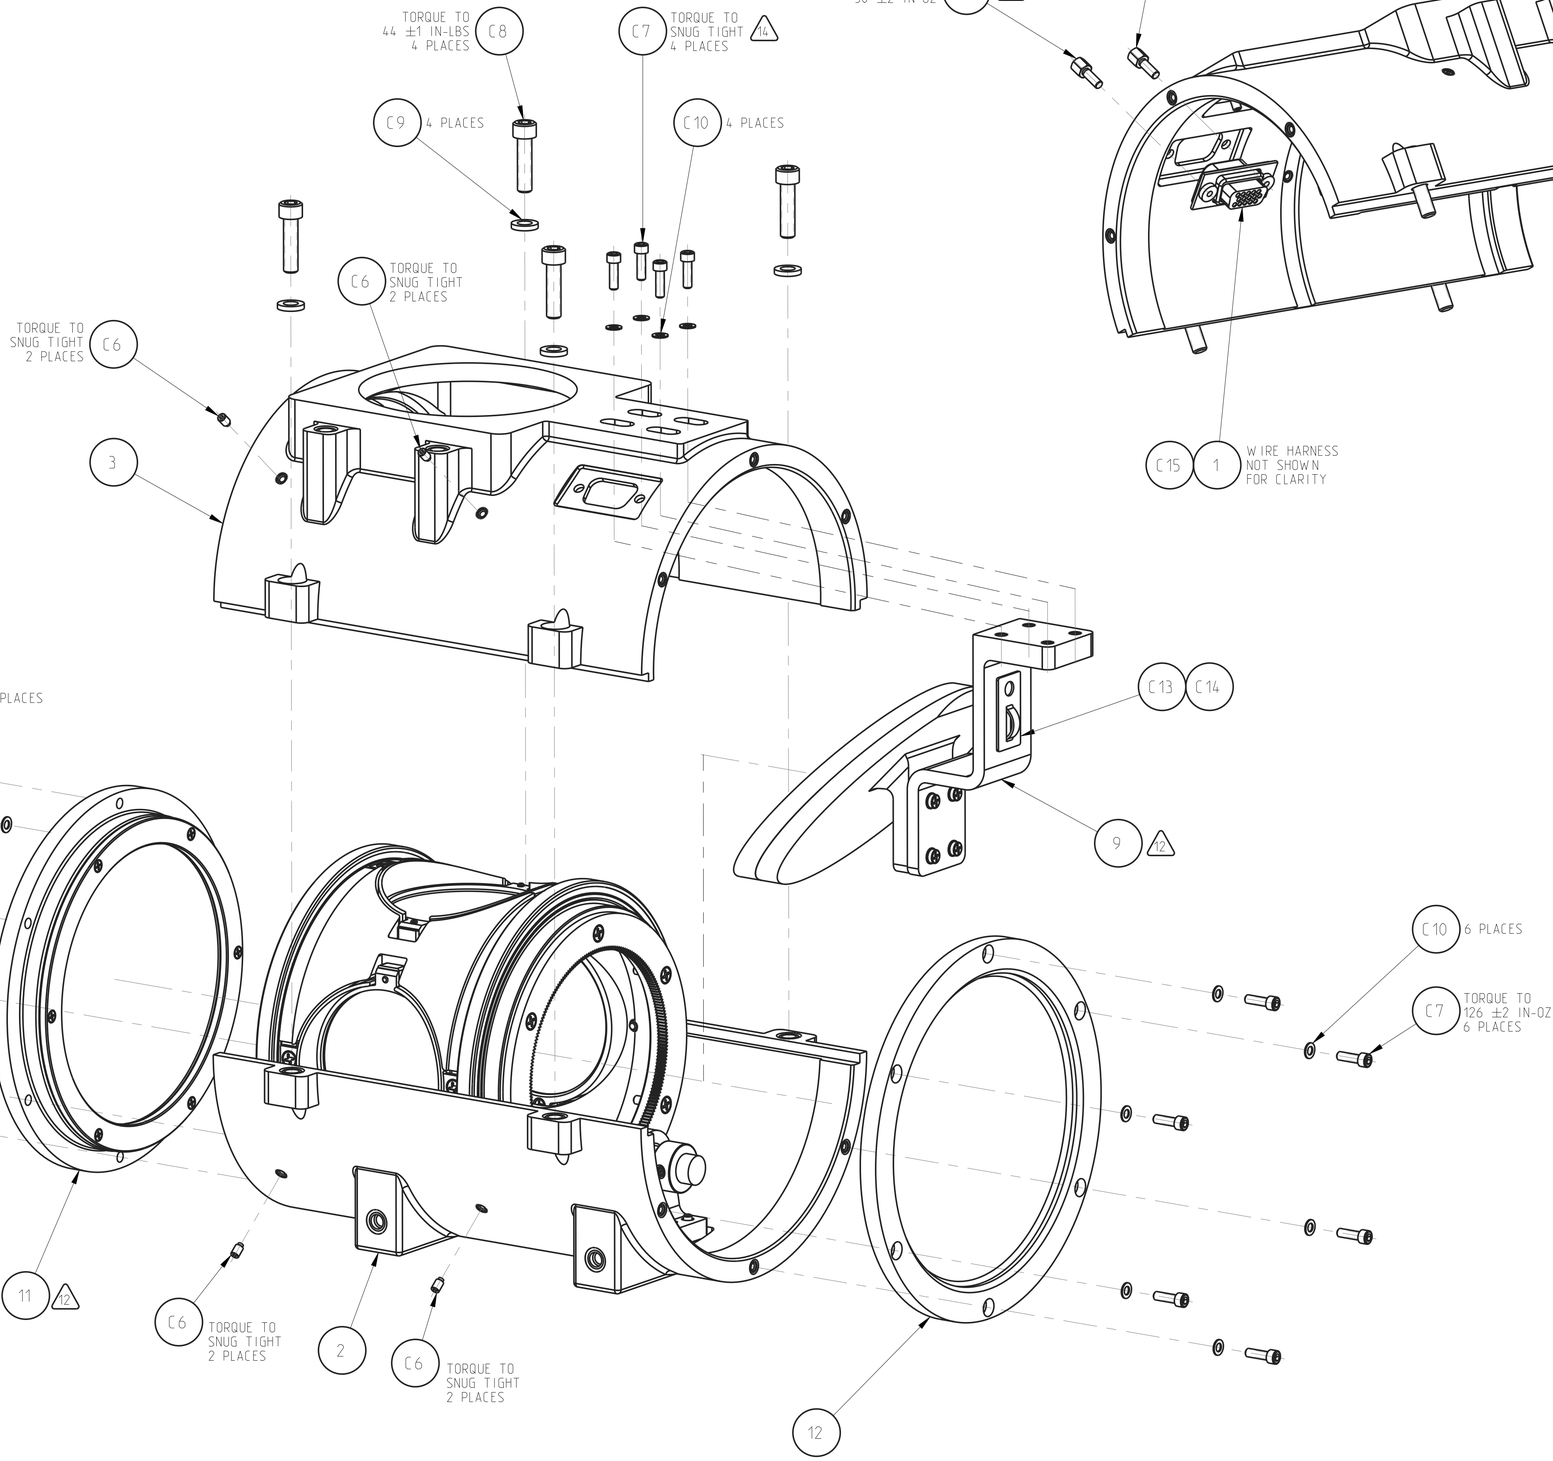

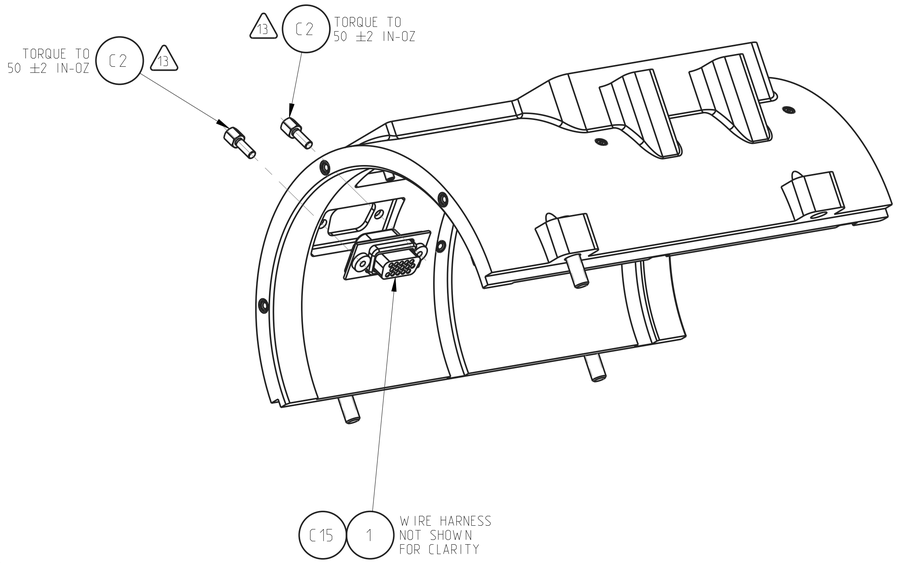

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA2300	D
SCALE 1/1	INITIAL REL DATE 12/17/2012	SHEET 3 OF 3	

PRO/E VERSION: Wildfire 2.0

DWG NO S1101MFA2300 SH 3 REV D

ZIN_D_2012.frm