PARTS LIST

Item	Qty	REFERENCE DESIGNATOR	PART NUMBER	Description	MANUFACTURER
1	1		S1101EFF1524	BARE BOARD	ZIN TECHNOLOGIES
2	5	C1, C2, C3, C4, C5	C0805C104K5RACTU	CAPACITOR, CERAMIC, 0.1uF, 50V, 10%, 0805	KEMET
3	1	C6	T494B106K016AT	CAPACITOR 10.0uF 16V TANTALUM 10% B-SIZE SMD	KEMET
4	10	C7, C8, C9, C10, C11, C12, C13, C14, C15, C16	C0805C105K4RACTU	CAPACITOR 1.0uF 16V CERAMIC X7R 0805	KEMET
5	5	R1, R4, R7, R10, R13	ERJ-6ENF1502V	RESISTOR, 15K, 1/8W, 1%, 0805	PANASONIC - ECG
6	8	R2, R3, R5, R6, R11, R12, R14, R15	ERJ-6ENF10R0V	RESISTOR, 10 OHM, 1/8W, 1%, 0805	PANASONIC - ECG
7	2	R8, R9	ERJ-6ENF30R0V	RESISTOR, 30 OHM, 1/8W, 1%, 0805	PANASONIC - ECG
8	5	U1, U2, U3, U4, U5	AD8628ARTZ	SINGLE SUPPLY OP AMP, SOT-23	ANALOG DEVICES
9	4	U6, U9, U15, U18	XP-0055	THERMOPILE DETECTOR, THIN FILM BASED	DEXTER RESEARCH CENTER
10	5	U7, U10, U13, U16, U19	LT1790ACS6-1.25	LOW DROPOUT REFERENCE SOURCE	LINEAR TECHNOLOGY
11	5	U8, U11, U14, U17, U20	LM20CIM7	TEMPERATURE SENSOR, 2.4V, 10uA, SC70	NATIONAL
12	1	U12	XP-0156	THERMOPILE DETECTOR, THIN FILM BASED	DEXTER RESEARCH CENTER
13	A/R		TZ-211	LABEL, 1/4 BLK LETTERS WHT BACKROUND	BROTHER
14	A/R		3140	RTV FOR CONFORMAL COATING	DOW CORNING
15	A/R		PR-1204	PRIMER FOR CONFORMAL COATING	DOW CORNING
16	A/R		SN63PB37/RMA	SOLDER	

8. CONFORMAL COATING, STAKING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1 AND THE FOLLOWING NOTES:
   - A. PERFORM CLEANLINESS TEST.
   - B. BAKE PWA AT 93°C ±5.5°C (200°F ±10°F) FOR 4 HOURS PRIOR TO CONFORMAL COATING.
   - △C MASK OFF ALL DESIGNATED AREAS USING KAPTON TAPE. ALL MASKING OPERATIONS SHALL BE PERFORMED UNDER AN AIR IONIZER.
   - △D MEASURE CONFORMAL COATING THICKNESS AT DESIGNATED AREAS.
   - E. CONFORMAL COAT THE COMPLETE ASSEMBLY USING ITEM 14 AND ITEM 15.
9. ENGINEER OR TECHNICIAN SHALL FUNCTIONALLY TEST THE COMPLETED ASSEMBLY AFTER CONFORMAL COATING PER TEST PLAN ACME-TST-022.
10. PLACE THE COMPLETED ASSEMBLY IN CLEAN, STATIC DISSIPATIVE PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER PER SAE AS478, METHOD 35. STORE IN A PROJECT APPROVED STORAGE AREA.
11. REFERENCE SCHEMATIC: S1101EFS1524
12. EXPEDITION CONTROL FILES: S1101EFA1524_REV_C.ZIP

NOTES: UNLESS OTHERWISE SPECIFIED

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. DEMOISTURIZE (BAKE OUT) PWB (ITEM 1) FOR A MINIMUM OF 2 HOURS AT 93°C ±5.5°C (200°F ±10°F.) PERFORM SOLDERING IMMEDIATELY AFTER BAKING, OR STORE IN A CLEAN, DRY, SEALED STATIC DISSIPATIVE BAG OR CONTAINER.
5. △5 MARK THE ASSEMBLY WITH REV AND S/N USING ITEM 13.
6. ASSEMBLY, SOLDERING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.2, NASA-STD-8739.3, AND THE FOLLOWING NOTES:
   - A. INSTALL AND SOLDER ALL SURFACE MOUNT (SMT) PART BEFORE THROUGH HOLE PARTS USING SOLDER (ITEM 16.)
   - B. FOR THROUGH HOLE PARTS, LEAD TERMINATIONS SHALL BE STRAIGHT THROUGH (NOT LAPPED OR CLINCHED.)
   - △C PLACE ITEM #9 DIRECTLY ON TOP OF ITEM #11 UNTIL IT TOUCHES PRIOR TO SOLDERING.
   - △D PLACE ITEM #12 DIRECTLY ON TOP OF ITEM #11 UNTIL IT TOUCHES PRIOR TO SOLDERING.
7. ENGINEER OR TECHNICIAN SHALL FUNCTIONALLY TEST THE COMPLETED ASSEMBLY PRIOR TO CONFORMAL COATING PER TEST PLAN ACME-TST-022.

ACME-ECO-336 In Process

CHG	ZONE	DESCRIPTION	APP/DATE
C		REVISED PER ACME-ECO-258 AND ACME-ECO-277	TAG 4/15/14 DAS 4/15/14 RJP 4/14/14
B		REVISED PER ACME-ECO-102 AND ACME-ECO-121	TAG 3/22/13 MTH 3/25/13 RJP 3/22/13
A		REVISED PER ACME-ECO-051	TAG 12/14/12 DAS 12/14/12 RJP 12/13/12

REVISIONS

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E. McCLOSKEY DATE: 4/15/14

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCE ON

.X	± .05	PROJECT LEAD	B. BOROWSKI 2/21/2012
.XX	± .01	QUALITY	D. SEELEY 2/21/2012
.XXX	± .005	SAFETY	W. BORRELLI 2/21/2012
FRACTION	± X/XX	ENGINEER	T. GOBELI 2/28/2012
ANGULAR	± X° XX'	DESIGNER	R. PFEIFFER 2/21/2012
BREAK EDGES	.XX-.XX	REVIEWER	D. STRANG 2/22/2012

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200

CONTRACT NUMBER: NNC09BA02B
DELIVERY NUMBER: SPACE110
FILE LOCATION: S1101EFA1524_REV_C.bpd
CAD PACKAGE: BLUEPRINT

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

NEXT ASSEMBLY
ACME
RADIOMETER ASSEMBLY
S1101MFA1520


TITLE
ACME
RADIOMETER BOARD
ASSEMBLY DRAWING


SIZE	DRAWING NUMBER	REV	BLDG	AREA
C	S1101EFA1524	C	ZIN	GRC

UNITS: INCH

SCALE:	INITIAL REL DATE	SHEET	DISCIPLINE
NONE	2/21/2012	1 OF 2	ELECTRICAL

REV C
DRAWING NUMBER S1101EFA1524
SIZE C

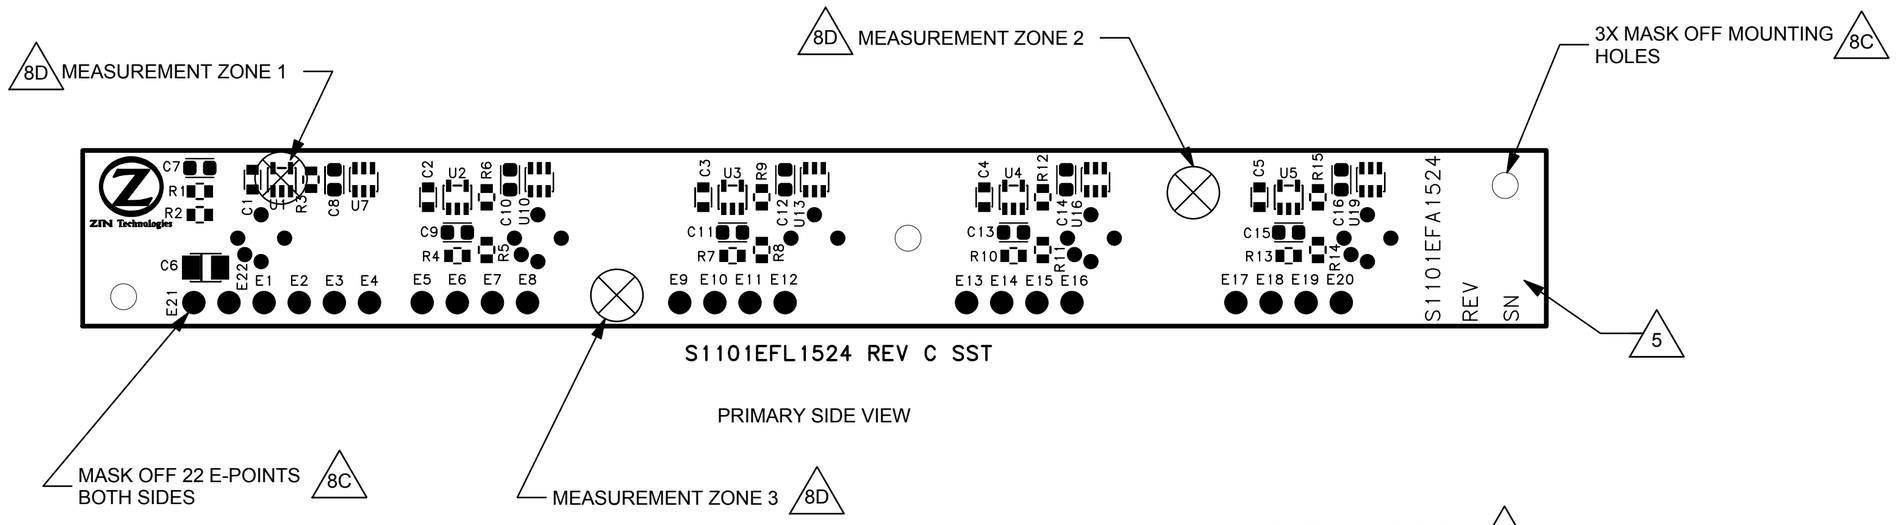

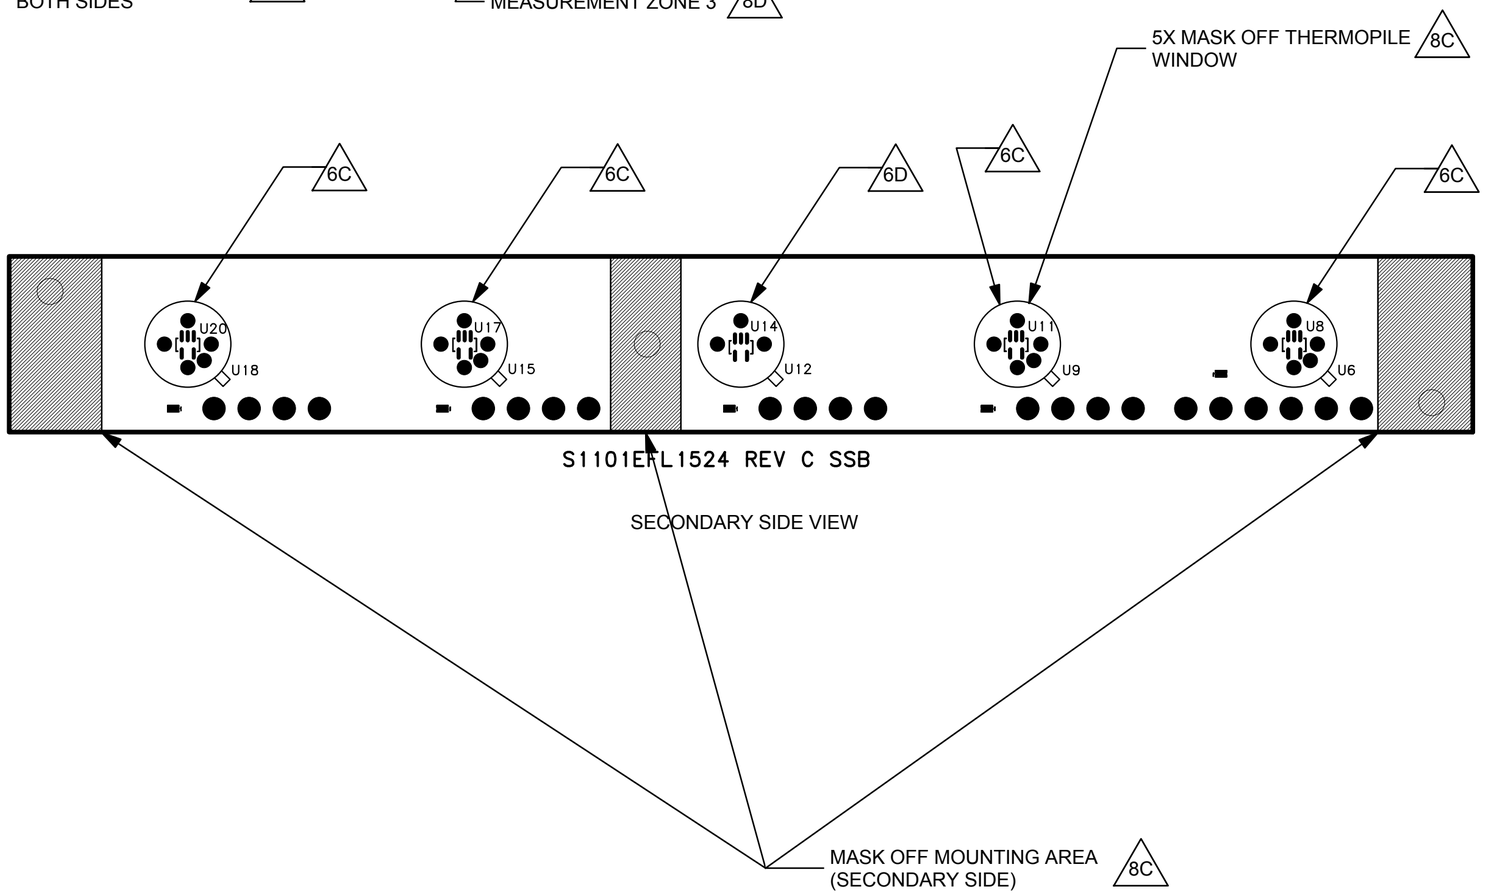

ACME-ECO-336 In Process

CHG	ZONE	DESCRIPTION	APP/DATE
REVISIONS			

SIZE	DRAWING NUMBER	REV	BLDG	AREA
C	S1101EFA1524	C	ZIN	GRC
			UNITS: INCH	
SCALE: NONE	INITIAL REL DATE 2/21/2012	SHEET 2 OF 2	DISCIPLINE ELECTRICAL	

SIZE C | DRAWING NUMBER S1101EFA1524 | REV C