

DRAWING LIST

ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	S1101MFA1542	TFP ARRAY COVER BASE ASSEMBLY
2	1	S1101MFD1540	TFP ARRAY COVER
3	1	S1101MFD1545	SCREW RETAINING PLATE
4	1	S1101MFP1544	MODIFIED TFP COVER FASTENER
5	1	S1101MFT1539-XX	COMBO LABEL
6	1	S1101MFT1539-21	WHITE LABEL

COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
C1	1	MS51844-62	COMPRESSION SLEEVE, 1/16 DIA WIRE, STAINLESS STEEL
C2	1	34119	RING TERMINAL, NON-INSULATED, 16-14 AWG, #4 STUD, AMP SOLISTRAND
C3	1	NAS1101E04-5	SCREW, MACHINE-FLAT FILLISTER HEAD .112-40 UNJC-3A X .312 LENGTH
C4	2	NAS620C4	#4 FLAT WASHER REDUCED OUTER DIAMETER
C5	4	NAS1102E02-4	.086-56 UNJC-3A X .250 FLAT 100 DEG HEAD MACHINE SCREW
C6	A/R	1838 B/A GREEN	3M SCOTCH WELD EPOXY ADHESIVE
C7	A/R	8908T32	WIRE ROPE, 1/16 DIA, STAINLESS STEEL, MCMASTER-CARR

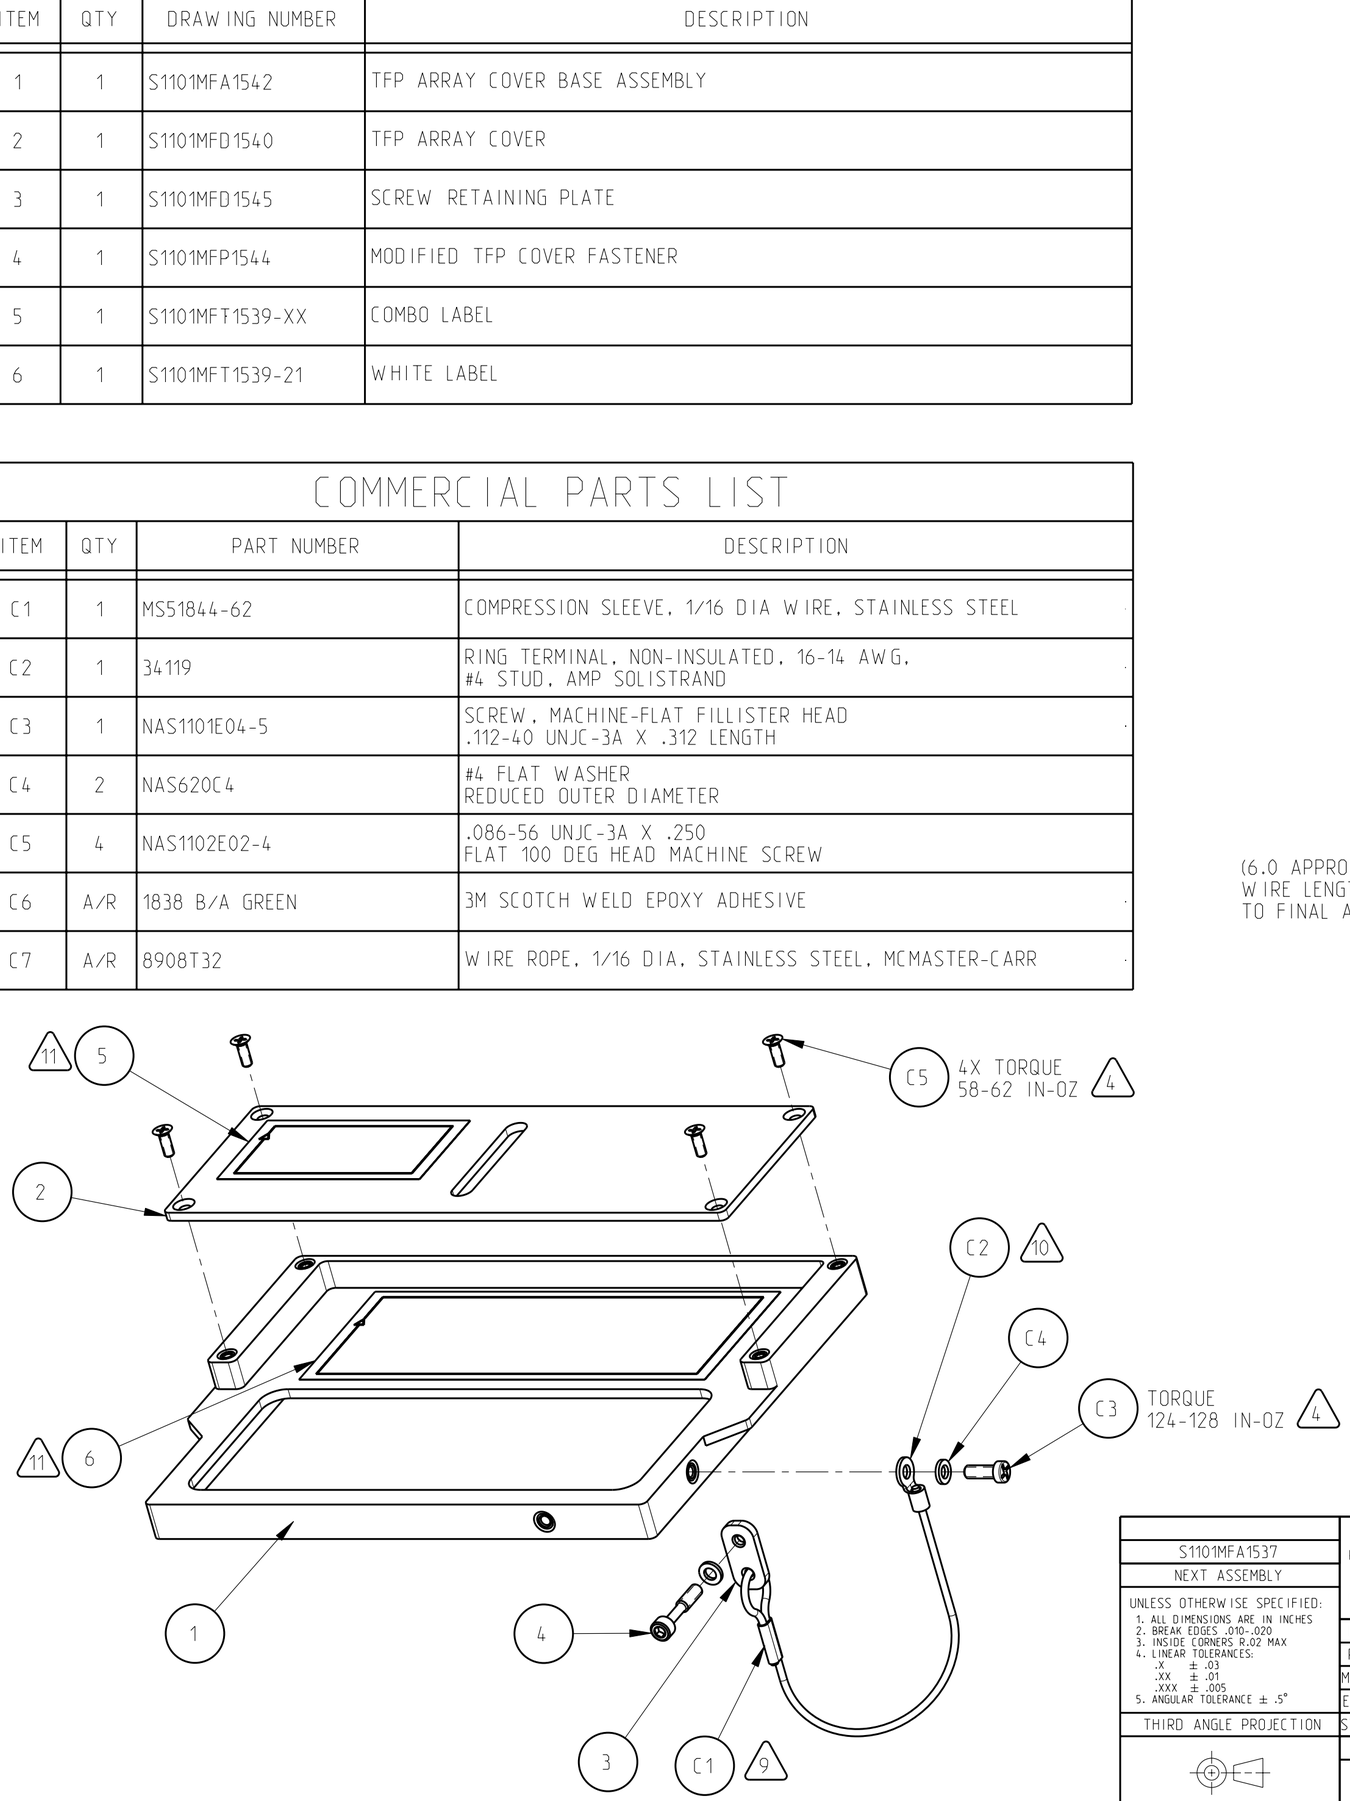

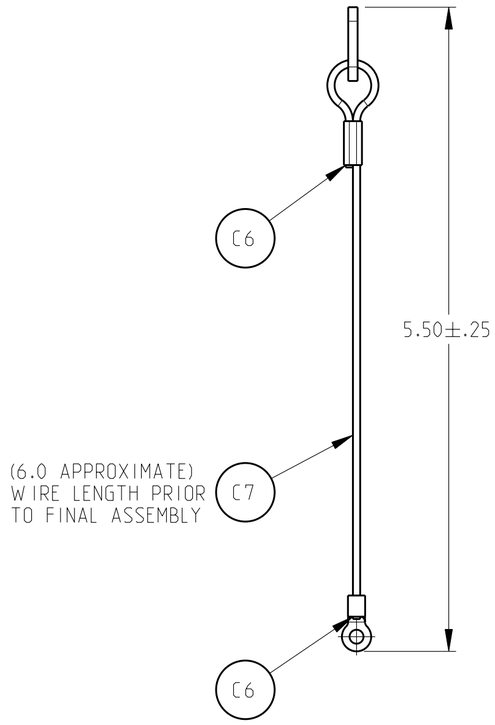

NOTES:

1. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ASSEMBLE PER APPROVED PROCESS PLAN FOR INITIAL BUILD.
3. STAKING, BONDING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1.
4. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING OR ASSEMBLY PROCEDURE.
5. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3 (GOLD COLOR).
6. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
7. HANDLE WITH CLEAN, LINT-FREE GLOVES.
8. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
9. CRIMP ITEM C1 WITH TOOL 51-B4-887. COVER SHARP EDGES OF WIRE WITH C6 EPOXY.
10. CRIMP ITEM C2 WITH TOOL TR-490 OR EQUIVALENT. COVER SHARP EDGES OF WIRE WITH C6 EPOXY.
11. APPLY LABEL TO CLEAN, DRY SURFACE, IN LOCATION SHOWN.
12. SEE SHEET 2 FOR ADDITIONAL INFORMATION.

REV	DESCRIPTION	APPROVED
B	INCORPORATED ACME-ECO-443	J.O. 04/28/15 A.D. 04/30/15 G.F. 04/30/15
A	INCORPORATED ACME-ECO-206	A.D. 08/26/13 K.R. 08/22/13 G.F. 08/21/13

REVISION HISTORY

S1101MFA1537
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: *E.McCLOSKEY 05/04/15*
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	G.FEDEVICH 02/11/13	QUALITY	D.SEELEY 02/14/13
REVIEWER	L.FLOOR 02/12/13	MATERIALS	M.WILKINSON 02/11/13
MECHANICAL	A.DRAKE 02/11/13	PROJ LEAD	B.BOROWSKI 02/21/13
ELECTRICAL	T.GOBELI 02/19/13		
STRUCTURAL	C.WERNER 02/20/13		
SAFETY	W.BORRELLI 02/11/13		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
TFP ARRAY COVER ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101MFA1539	B

SCALE 1/1 | INITIAL REL DATE 02/21/2013 | SHEET 1 OF 2


RELEASE LEVEL: RELEASED
MODEL: S1101MFA1539


PRO/E VERSION: Wildfire 5.0

REV B | SH 1 | DWG NO S1101MFA1539

NOTES:

1. SEE SHEET 1 FOR ADDITIONAL INFORMATION, GENERAL NOTES AND TOLERANCES.

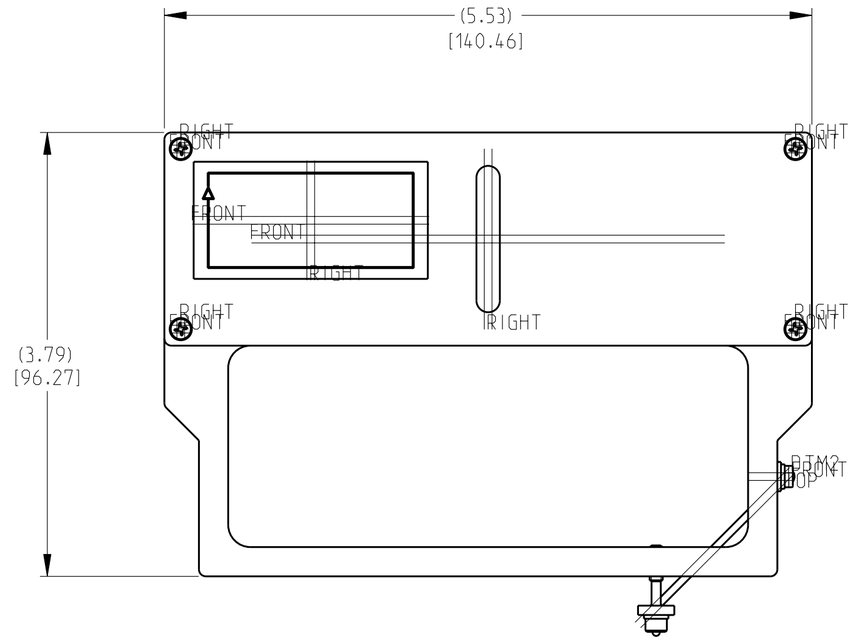

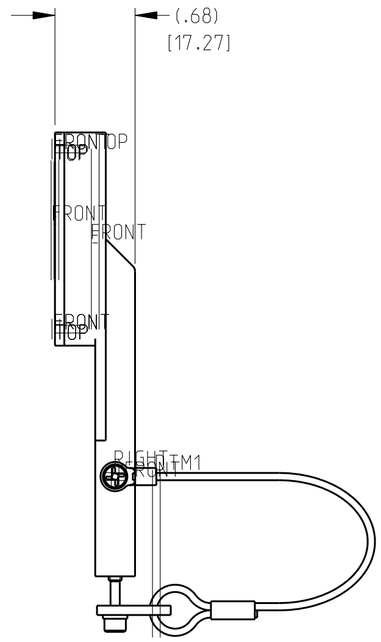

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101MFA1539	B
SCALE 1/1	INITIAL REL DATE 02/21/2013	SHEET 2 OF 2	

ZIN_C_2012.frm

PRO/E VERSION: Wildfire 5.0

DWG NO S1101MFA1539 | SH 2 | REV B