


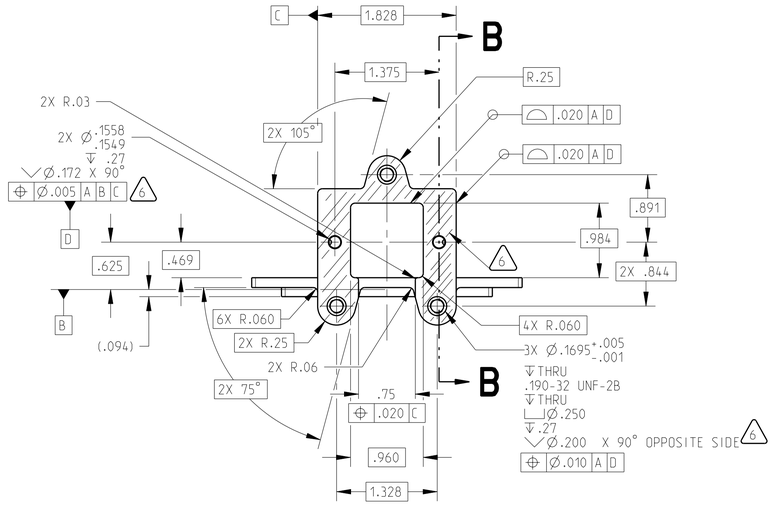


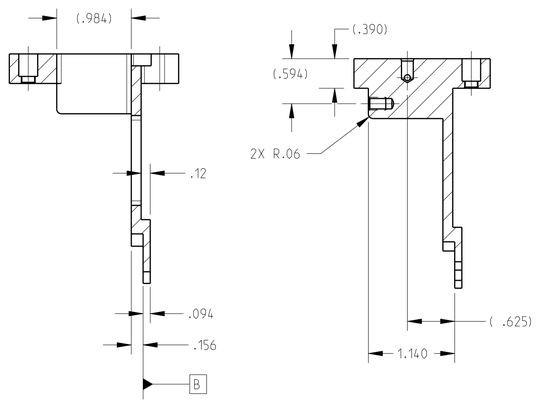

SECTION **A-A**


SECTION **B-B**







NOTES:

1. MATERIAL: 6061-T6 OR T651 ALUMINUM ALLOY PER AMS 4027 OR AMS 4117.
2. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL MATERIALS AND PROCESSES.
3. 125 µIN Ra ALL MACHINED SURFACES PER ANSI/ASME B46.1 UNLESS OTHERWISE SPECIFIED.
4. ALL UNDIMENSIONED MACHINED INSIDE RADII .010 MAXIMUM.
5. MARK PART WITH IDENTIFICATION NUMBER IN LOCATION SHOWN, PRIOR TO SURFACE TREATMENT, BY ENGRAVING PER SAE-AS478-3B2. THE PART IDENTIFICATION NUMBER SHALL INCLUDE THE DRAWING NUMBER, A DASH, AND A SERIAL NUMBER. FABRICATOR TO SERIALIZE WITH -___, AS SPECIFIED IN WORK ORDER/SOW.
6. DO NOT ANODIZE INDICATED HOLES AND SURFACES. CHEMICAL CONVERSION COAT INDICATED HOLES PER MIL-DTL-5541, TYPE I, CLASS 3.
7. BLACK ANODIZE PER MIL-A-8625, TYPE II, CLASS 2.
8. AFTER MACHINING, CLEAN ALL SURFACES WITH ISOPROPYL OR ETHYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
9. AFTER CLEANING, HANDLE WITH CLEAN, LINT-FREE GLOVES.
10. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW PER SAE-AS478, METHOD 35D.

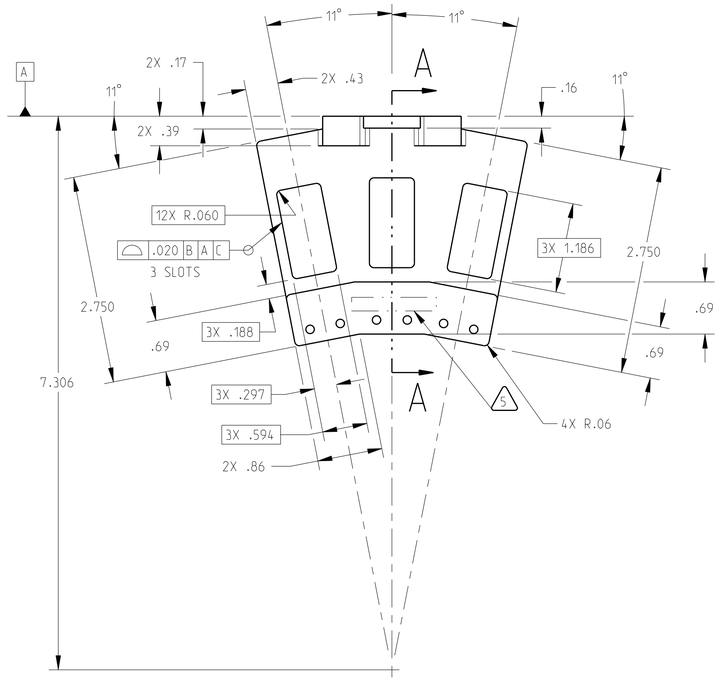

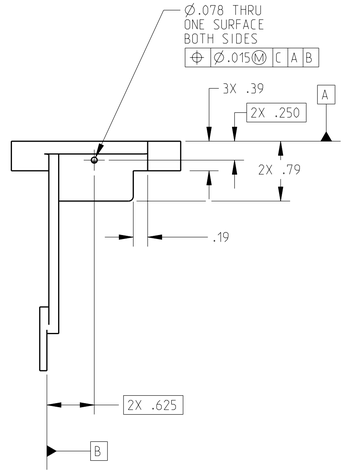

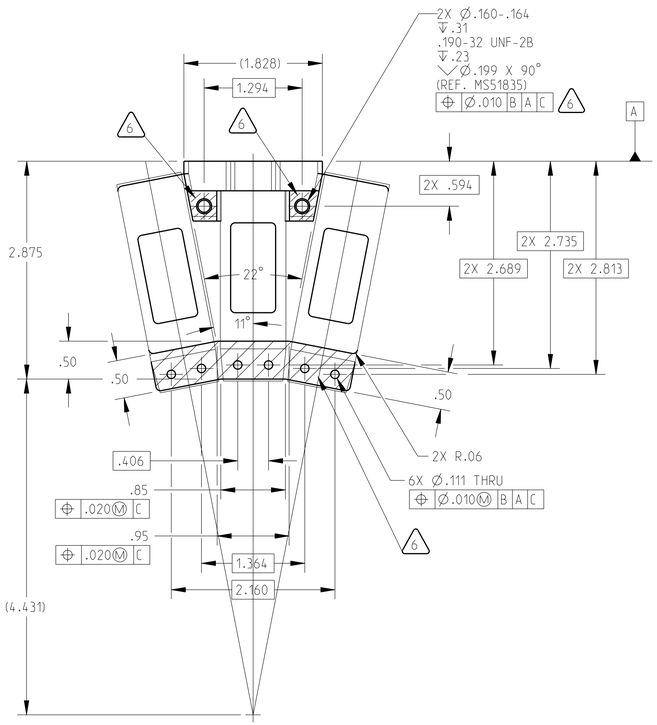

REV	DESCRIPTION	APPROVED
D	INCORPORATED ACME ECO-365	KR 9/17/14 GF 9/18/14 AD 9/18/14
C	INCORPORATED ACME ECO-257	KR 1/6/14 GF 1/6/14 AD 1/7/14
B	INCORPORATED ACME ECO-143 INCORPORATED ACME ECO-129	KR 4/9/13 MA 4/9/13 AD 4/10/13
A	INCORPORATED ACME ECO-119	MP 3/11/13 AD 3/12/13 GF 3/12/13

REVISION HISTORY

S1101MFA1501
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
.X ± .03
.XX ± .01
.XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: *E.McCLOSKEY 9/18/14*
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	*K.RHODES 10/22/12*	QUALITY	*D.SEELEY 11/2/12*
REVIEWER	*M.PREVITE 10/22/12*	MATERIALS	*M.WILKINSON 10/23/12*
MECHANICAL	*A.DRAKE 10/22/12*	PROJ LEAD	*B.BOROWSKI 11/2/12*
ELECTRICAL	*T.GOBELI 10/23/12*		
STRUCTURAL	*C.WERNER 10/29/12*		
SAFETY	*W.BORRELLI 10/26/12*		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC09BA02B
PROJECT CODE: SPACE110

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
PMT BRACKET

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFD1502	D

SCALE 1/1 | INITIAL REL DATE 11/2/12 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL: S1101MFD1502

PRO/E VERSION: Wildfire 2.0

REV D | SH 1 | DWG NO S1101MFD1502

ZIN_D_2012.frm