
DRAWING LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	S1101EFA1719	E-FIELD POSITIVE SUPPLY INTERCONNECT ASSEMBLY
2	1	S1101MFA1709	E-FIELD SUPPLY BASE ASSEMBLY
3	1	S1101MFA1711	E-FIELD SUPPLY PASSIVE CIRCUIT MOUNT ASSEMBLY
4	1	S1101MFD1713	E-FIELD SUPPLY PASSIVE CIRCUIT BASE
5	1	S1101MFD1714	E-FIELD SUPPLY PASSIVE CIRCUIT COVER
6	1	S1101MFD1715	E-FIELD NEGATIVE SUPPLY INTERCONNECT COVER
7	1	S1101MFD1718	E-FIELD POSITIVE SUPPLY INTERCONNECT COVER
8	1	S1101MFP1734	MODIFIED 10KV NEGATIVE SUPPLY MODULE
9	1	S1101MFT1732-XXX	COMBO LABEL
10	1	S1101MFT1732-01	CONNECTOR LABEL
11	1	S1101MFT1732-02	CONNECTOR LABEL

TORQUE TABLE		
ITEM	TORQUE RANGE	UNITS
T1	60±2	IN-OZ
T2	63±2	IN-OZ
T3	126±2	IN-OZ
T4	234±2	IN-OZ
T5	17.7±1	IN-LB

COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	1	2000.23 IG 2500:1	HIGH VOLTAGE DIVIDER, 0.1% RATIO TOL, 0.25% ABS TOL, 15 PPM RATIO TCR, 30 PPM RATIO ABS TCR (EBG RESISTORS)
C2	1	D38999/20FC35PN	WALL MOUNT RECEPTACLE, THREADED COUPLING, SHELL SIZE C, 22 SIZE 22D PINS, MIL-DTL-38999
C3	A/R	M39029/58-360	CONNECTOR CONTACT PIN, SIZE 22D, MIL-C-39029
C4	1	CA-30KV-1001	HIGH VOLTAGE RECEPTACLE, 30KV DC (ULTRAVOLT)
C5	1	M85049/95-14A	NUT PLATE, 3/4 PERIMETER, FLANGE MOUNT RECEPTACLE, SHELL SIZE C
C6	4	95868A305	SCREW, CAP, SOCKET HEAD, NYLON .138-32 UNC-2A X 1.25 JG (McMASTER-CARR)
C7	8	MS15795-803	WASHER, FLAT, METAL, ROUND, GENERAL PURPOSE .125 ID X .250 OD X .022 THICK, CRES, PASSIVATED
C8	4	MS21043-04	NUT, SELF-LOCKING, CRES, REDUCED HEXAGON 0.112-40 UNJC THREAD, WITH OR WITHOUT LUBRICANT
C9	1	MU18-4R/SK	RING TONGUE, NON-INSULATED BUTTED SEAM, 22-18 AWG #4 STUD (3M SCOTCHLOK)
C10	3	MU18-8R/LK	RING TONGUE, NON-INSULATED BUTTED SEAM, 22-18 AWG #8 STUD (3M SCOTCHLOK)
C11	2	NA0068A040008	PAN HEAD SCREW, OFFSET CRUCIFORM, METRIC, A286 CRES, MJ4 X 0.7, 8 MM LONG
C12	12	NAS1101E02-5	SCREW, MACHINE-FLAT, FILLISTER HEAD, A286, PASSIVATED .086-56 UNJC-3A X .312 LENGTH
C13	4	NAS1101E04-6	SCREW, MACHINE-FLAT, FILLISTER HEAD, A286, PASSIVATED .112-40 UNJC-3A X .375 LENGTH
C14	4	90295A090	FLAT WASHER, .162 ID. X .0312 OD. X .062 THK NYLON, McMASTER-CARR
C15	5	NAS1102E06-5	SCREW, MACHINE-FLAT, 100 DEG HEAD, CRES, PASSIVATED .1380-32 UNJC-3A X .312 LENGTH
C16	12	NAS1149EN232R	FLAT WASHER, CRES, PASSIVATE FINISH NO. 2 SIZE .032 THICK
C17	4	NAS1352N04-8	SCREW, CAP, SOCKET HEAD, A286, PASSIVATED .1120-40 UNRC-3A X .500
C18	4	NAS620C4L	FLAT WASHER, REDUCED OUTSIDE DIAMETER NO. 4 (.1120), .016 THICK, CRES
C19	A/R	ST250-1 BLK	SHRINK TAPE, 1 INCH (DABURN ELECTRONICS)
C20	A/R	3145 CLEAR	RTV ADHESIVE/SEALANT CLEAR (DOW CORNING)
C21	A/R	P-224-1	TAPE, KAPTON, 1 IN. WIDE, 1-MIL (PERMACEL)
C22	A/R	SN63PB37/RMA	SOLDER, TIN/LEAD, RMA FLUX CORE
C23	A/R	M23053/13-003-0	INSULATION SLEEVING, ELECTRICAL, HEAT SHRINKABLE FLUOROELASTOMER (VITON), .375 ID, BLACK
C24	1	SDG32104805-009	DECAL, ELECTROSTATIC SYMBOL .5 IN X .5 IN, METAL PHOTO AND ADHESIVE (JSC)
C25	1	660-024M13N	PROTECTIVE COVER, RECEPTACLE, SHELL SIZE 13 (GLENAIR)
C26	A/R	PLTIM-702Y	CABLE TIE, HALAR FLUOROPOLYMER, PANDUIT CORP.

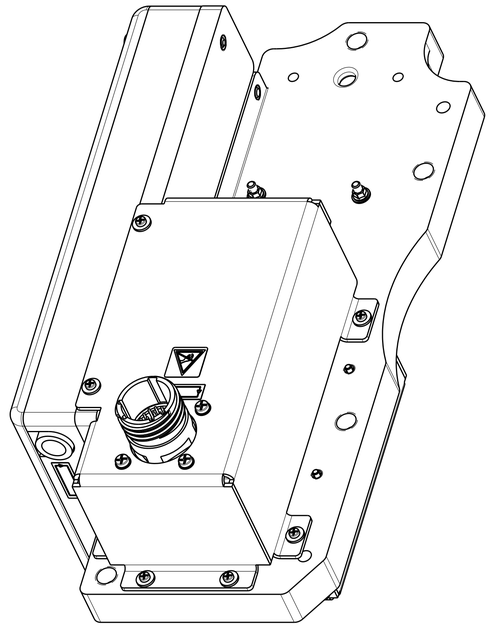

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. SOLDERING AND INSPECTION SHALL BE IN ACCORDANCE WITH IPC J-STD-001, CLASS 3 PLUS SPACE ADDENDUM.
4. STAKING, BONDING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1.
5. REFERENCE CONNECTION DIAGRAM S1101EFC1721 FOR WIRING AND APPLY CABLE TIES (ITEM C26) AS REQUIRED.
6. ASSEMBLE AND TEST PER ACME-TST-005
7. APPLY THREAD LOCKING COMPOUND PER ESTABLISHED PROCEDURES.
8. TIGHTEN FASTENERS SNUG TIGHT PER ESTABLISHED PROCEDURES.
9. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE 1, CLASS 3.
10. TORQUE VALUES NOTED ON THE DRAWING ARE EFFECTIVE TORQUE ONLY. RUNNING TORQUE IS REQUIRED FOR SELF LOCKING DEVICES AND BOLT FRICTION. RUNNING TORQUE MUST BE MEASURED AND ADDED TO THE EFFECTIVE TORQUE. RECORD RUNNING TORQUE AND FINAL TORQUE ON DRAWING OR ASSEMBLY PROCEDURE.
11. APPLY LABEL TO CLEAN, DRY SURFACE IN LOCATION SHOWN.
12. HARNESS ASSEMBLY AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.4 AND THE FOLLOWING NOTES:
    - A. TWIST WIRES BETWEEN 8 AND 16 TIMES THE OUTER DIAMETER OF THE HARNESS.
    - B. SEE TENSILE PULL STRENGTHS LIST PER NASA-STD-8739.4.
    - C. INSTALL CONTACTS IN ALL UNUSED POSITIONS OF CIRCULAR CONNECTOR.
    - D. PERFORM CONTACT RETENTION TEST PER NASA-STD-8739.4.
13. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
14. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
15. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, ESD BAG, TOTES OR APPROVED ESD PACKAGING. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
16. SEE SHEETS 2 THROUGH 3 FOR ADDITIONAL INFORMATION.

CRIMP TOOL AND TENSILE PULL STRENGTH LIST						
PART NUMBER	MANUFACTURER	CRIMP TOOL	POSITIONER	I/E TOOL	WIRE GAGE (AWG)	TENSILE STRENGTH (LB)
M39029/58-360	QPL	M22520/2-01	M22520/2-09	I: M81969/14-01 E: M81969/14-01	22	13
MU18-4R/SK	3M	TR-490 OR EQUIV.	N/A	N/A	22	13
MU18-8R/LK	3M	TR-490 OR EQUIV.	N/A	N/A	22	13

S1101MFA0100
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: E.McCLOSKEY 09/15/16
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	K.RHODES 12/21/15	QUALITY	L.WRIGHT 11/14/16
REVIEWER	J.OGRIN 11/11/16	MATERIALS	M.WILKINSON 11/14/16
MECHANICAL	K.DRAKE 12/22/15	PROJ LEAD	B.BOROWSKI 11/14/16
ELECTRICAL	T.GOBELI 12/31/15		
STRUCTURAL	C.WERNER 1/11/16		
SAFETY	W.BORRELLI 1/14/16		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

ACME-ECO-681 In Process

REV	DESCRIPTION	APPROVED
A	INCORPORATED ACME-ECO-580.	J.OGRIN 09/14/16 T.GOBELI 09/14/16 A.REID 09/14/16

REVISION HISTORY

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
E-FIELD NEGATIVE POWER SUPPLY ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1732	A

SCALE 1/1 & NOTED | INITIAL REL DATE 1/14/2016 | SHEET 1 OF 3

RELEASE LEVEL: RELEASED
MODEL: S1101MFA1732


PRO/E VERSION: Creo 2.0

REV A | SH 1 | S1101MFA1732 | DWG NO

ZIN_D_2012.frm

NOTES:

1. SEE SHEET 1 FOR ADDITIONAL INFORMATION. GENERAL NOTES AND TOLERANCES.

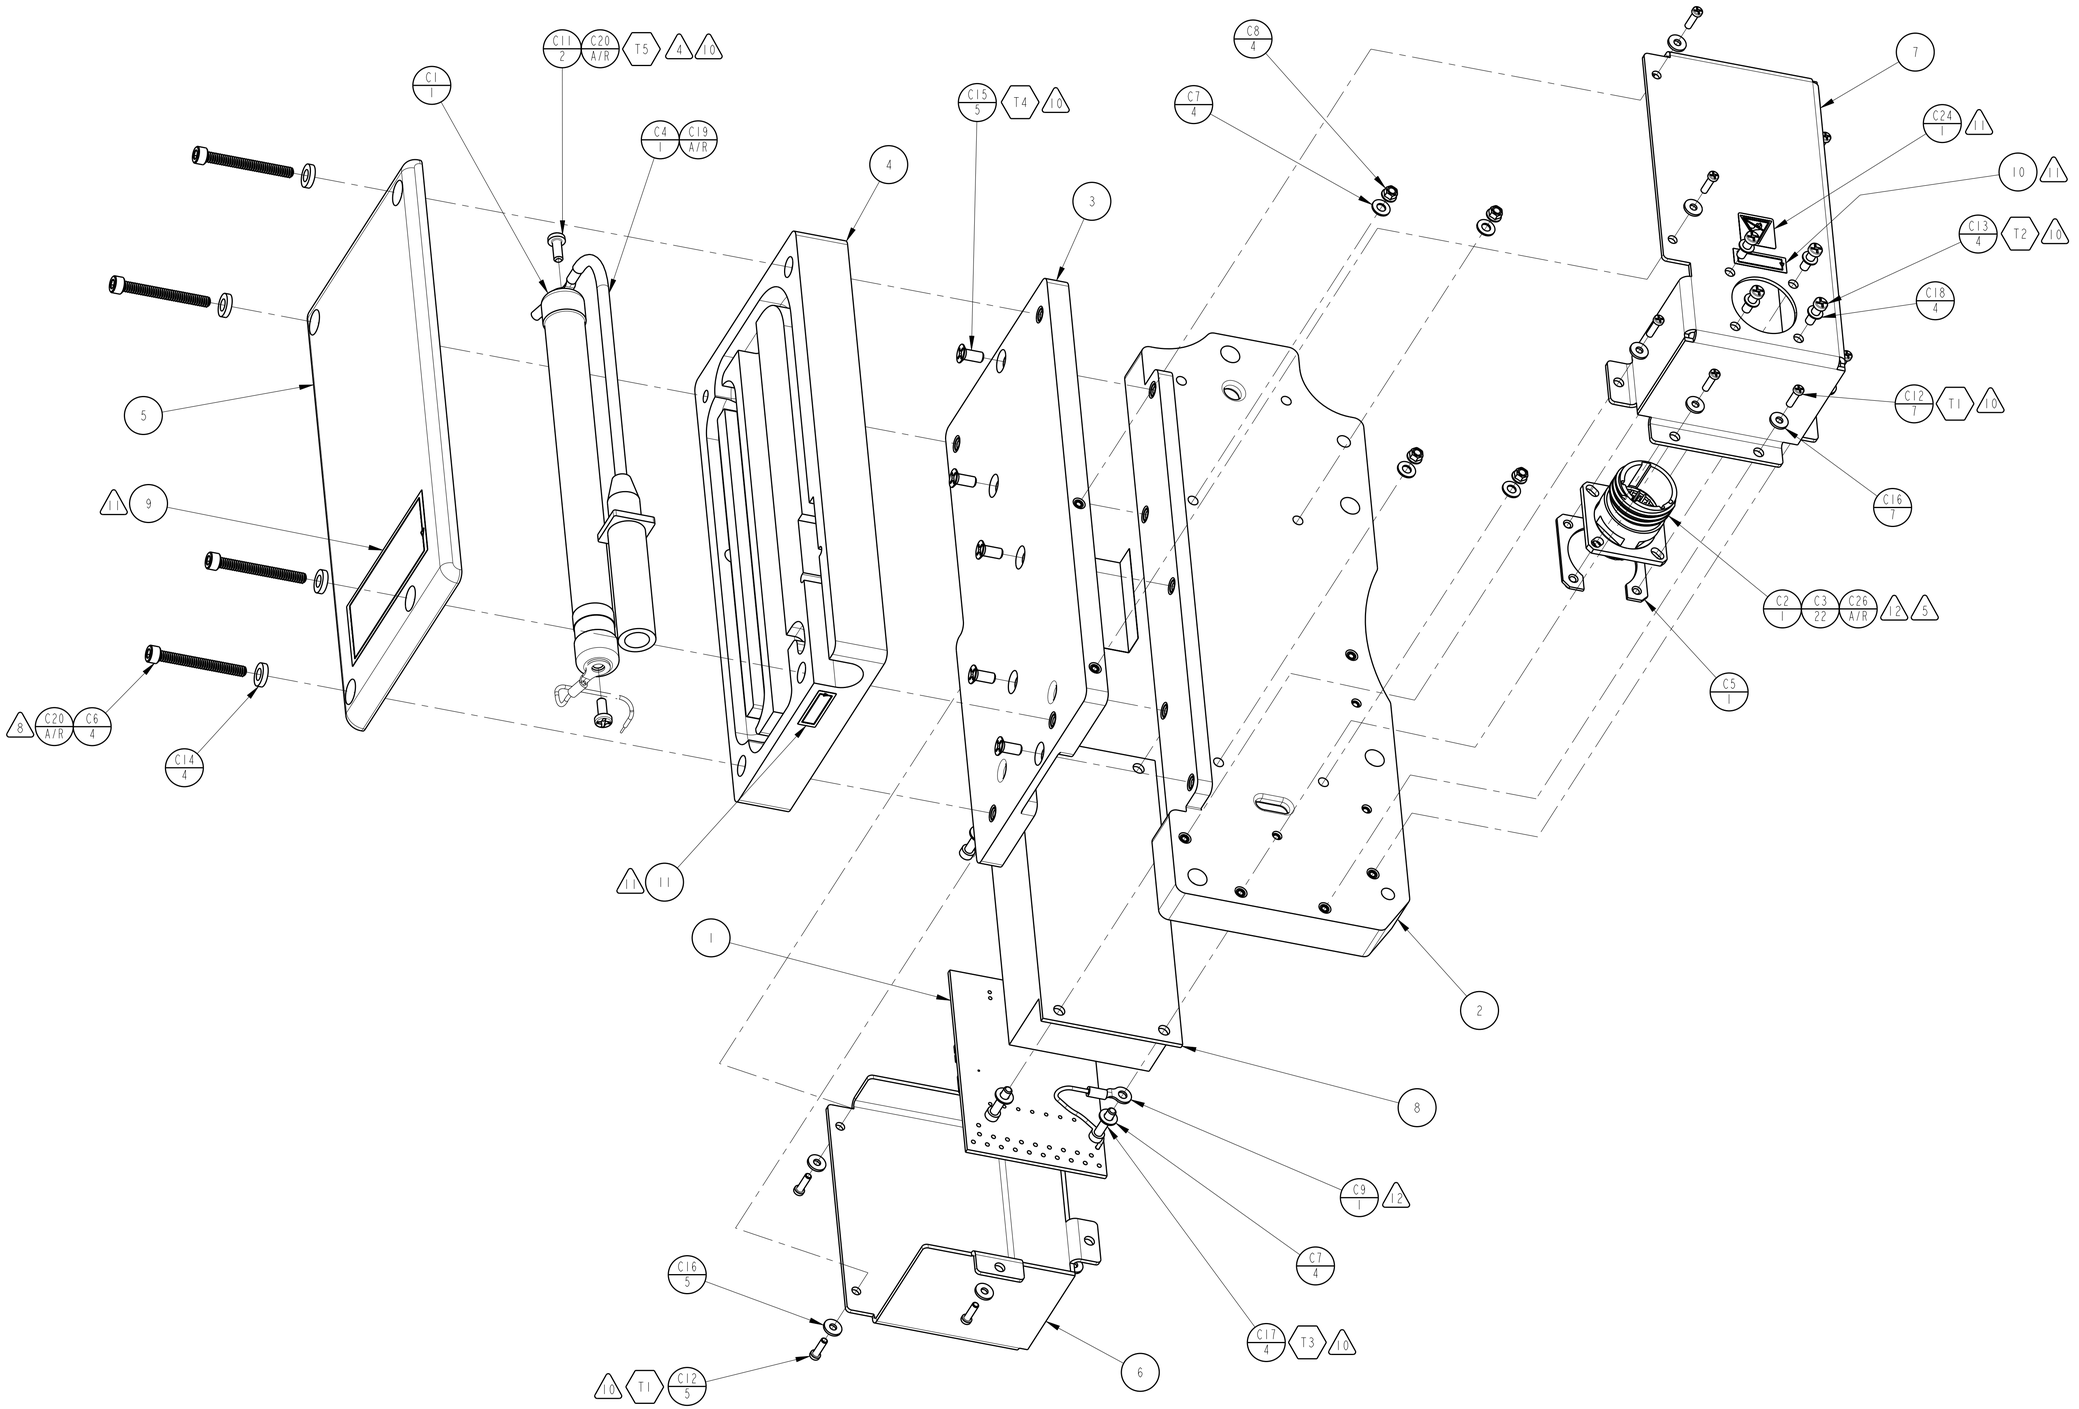

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1732	A
SCALE 1/1	INITIAL REL DATE 1/14/2016	SHEET 2 OF 3	


PRO/E VERSION: Creo 2.0

DWG NO S1101MFA1732 SH 2 REV A


ZIN_D_2012.frm


NOTES:


1. SEE SHEET 1 FOR ADDITIONAL INFORMATION. GENERAL NOTES AND TOLERANCES.

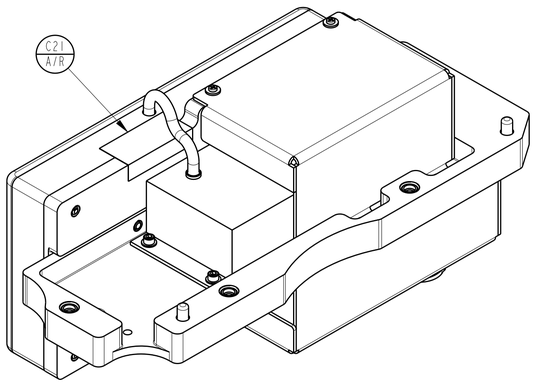


ISOMETRIC VIEW
FOR REFERNCE ONLY
SCALE 4/5

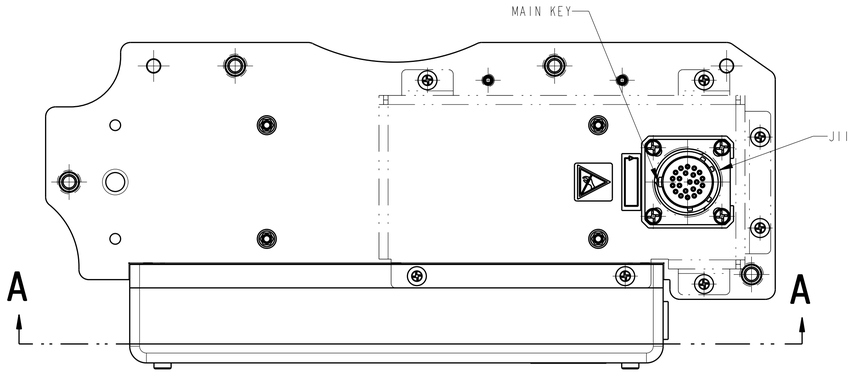


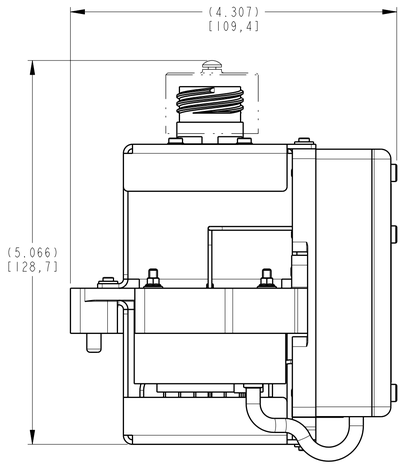

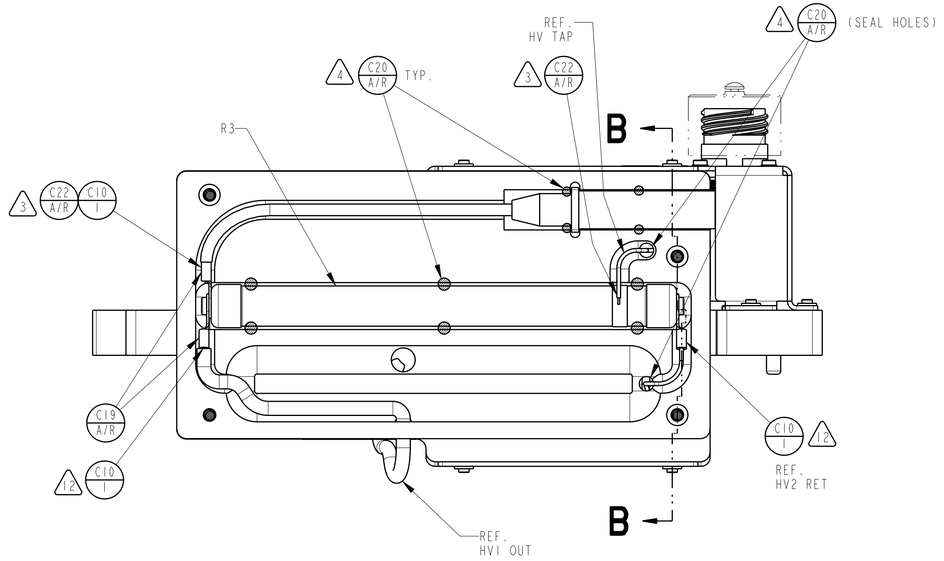


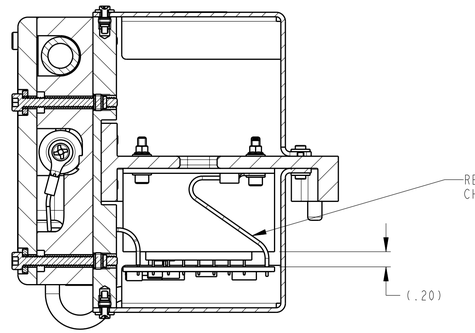

SECTION A-A

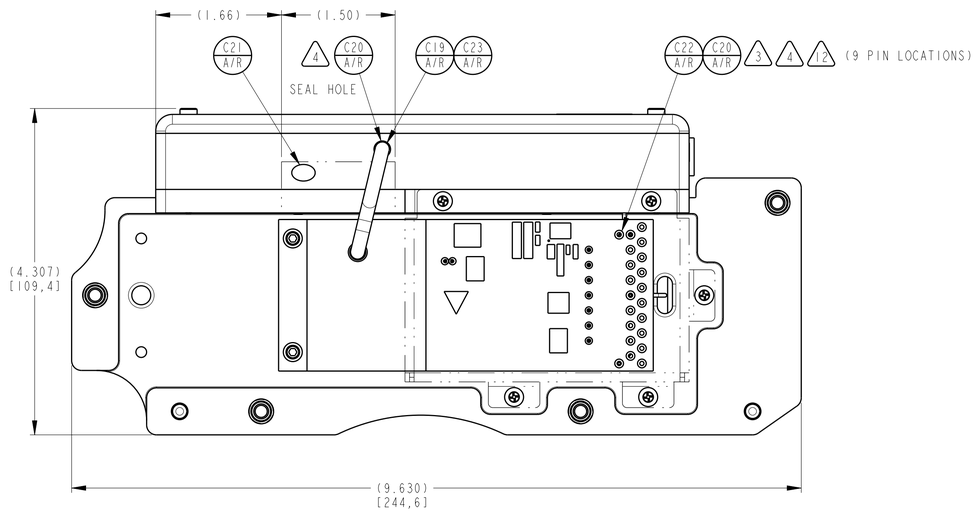

SECTION B-B

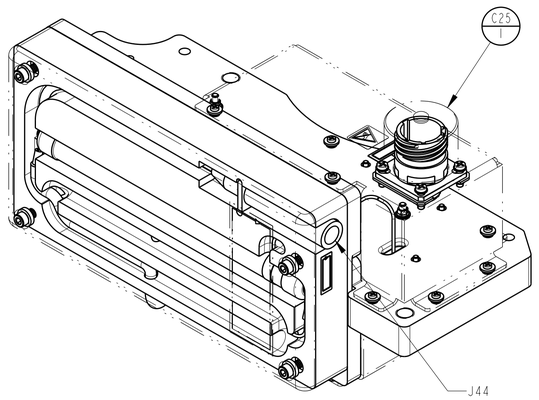

ISOMETRIC VIEW
FOR REFERENCE ONLY
SCALE 4/5

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1732	A
SCALE 1/1	INITIAL REL DATE 1/14/2016	SHEET 3 OF 3	

PRO/E VERSION: Creo 2.0

ZIN_D_2012.frm

DWG NO S1101MFA1732 SH 3 REV A