


DRAWING LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	10	S1101MFD1321	IGNITER UPPER ARM INSULATOR
2	1	S1101MFD1333	IGNITER TIP HOLDER BASE


COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	1	MS51830-102	INSERT, SCREW-THREAD, MINIATURE, CRES .112-40 UNJC-3B INTERNAL THREAD
C2	20	M39029/22-191	CONNECTOR CONTACT SOCKET, SIZE 22, MIL-C-39029
C3	A/R	45440	ADHESIVE, CYANOACRYLATE, LOCTITE 454 (HENKEL)
C4	A/R	2216 B/A GRAY	EPOXY ADHESIVE, SCOTCH-WELD GRAY (3M)

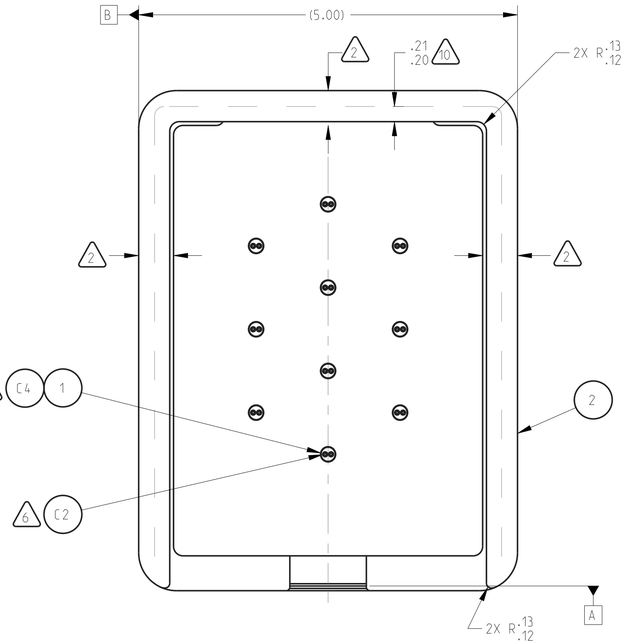

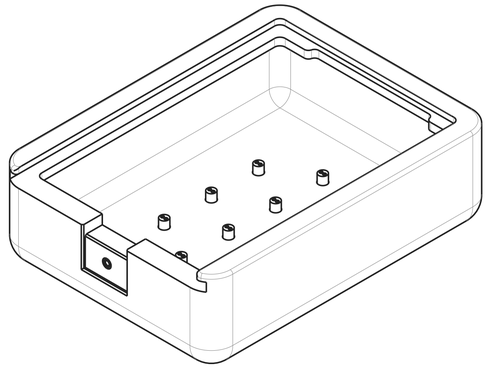

ISOMETRIC VIEW
FOR REFERENCE ONLY
SCALE 4/5

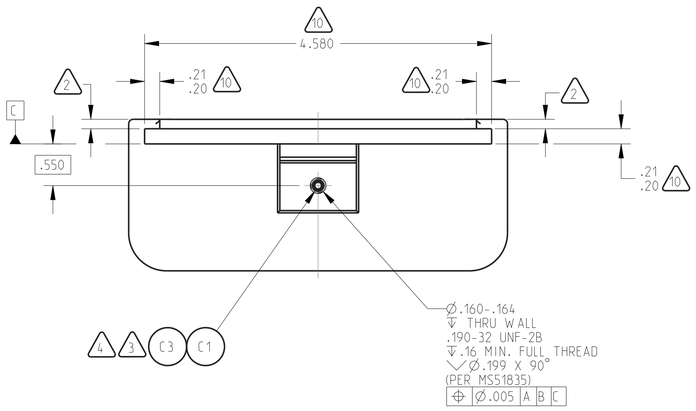

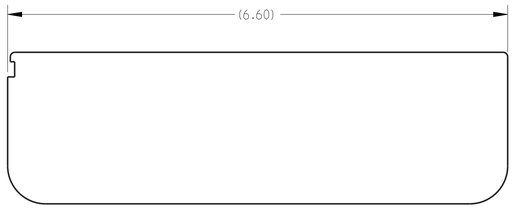

NOTES:

1. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. PERFORM DIMENSIONAL INSPECTION IN LOCATIONS SHOWN BEFORE AND AFTER ELECTROLESS NICKEL COAT TO VERIFY COATING THICKNESS.
3. REMOVE TANGS FROM THREADED INSERT. APPLY ADHESIVE TO EXTERNAL THREADS AND THREADS CONTAINED IN SUBSTRATE HOLE. DO NOT GET ADHESIVE ON INTERNAL THREADS OF INSERT. INSTALL INSERT .005"-.010" BELOW SURFACE. ALLOW TO DRY PER MANUFACTURER'S SPECIFICATIONS.
4. ELECTROLESS NICKEL COAT, .004 INCH THICKNESS PER REPLIKOTE PROCESS, REPLIFORM INC., BALTIMORE, MD. MASK THREADED INSERT.
5. FOLLOWING NICKEL COAT, BOND INSULATOR (ITEM 1) TO BASE (ITEM 2) USING EPOXY (ITEM C3). ALLOW TO CURE PER MANUFACTURER'S SPECIFICATIONS.
6. INSTALL CONTACT (ITEM C2) AND PRESS FLUSH WITH TOP OF INSULATOR (ITEM 1).
7. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
8. HANDLE WITH CLEAN, LINT-FREE GLOVES.
9. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.
10. MACHINE SLOT AND TAB ALL AROUND TO THE DIMENSIONS INDICATED AS REQUIRED. DATUM C SHOULD REMAIN UNMODIFIED EXCEPT TO CLEAN UP DRAWING ARTIFACTS.

REV	DESCRIPTION	APPROVED
A	INCORPORATION ACME-ECO-600.	LF 11/17/16 AK 11/17/16 AD 12/07/16

REVISION HISTORY

S1101MFA1338			
NEXT ASSEMBLY			
UNLESS OTHERWISE SPECIFIED: 1. ALL DIMENSIONS ARE IN INCHES 2. BREAK EDGES .010-.020 3. INSIDE CORNERS R.02 MAX 4. LINEAR TOLERANCES: .X ± .03 .XX ± .01 .XXX ± .005 5. ANGULAR TOLERANCE ± .5°			
THIRD ANGLE PROJECTION			

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: E.McCLOSKEY 12/07/2016
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	J.OGRIN 01/05/16	QUALITY	L.WRIGHT 01/11/16
REVIEWER	K.RHODES 01/06/16	MATERIALS	M.WILKINSON 01/05/16
MECHANICAL	A.DRAKE 01/07/16	PROJ LEAD	B.BOROWSKI 01/13/16
ELECTRICAL	T.GOBELI 01/06/16		
STRUCTURAL	C.WERNER 01/11/16		
SAFETY	R.BORRELLI 01/05/16		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3

ZIN TECHNOLOGIES
8745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
IGNITER TIP HOLDER BASE ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1332	A

SCALE 1/1 & NOTED | INITIAL REL DATE 01/14/2016 | SHEET 1 OF 1

RELEASE LEVEL: WORKING
MODEL: S1101MFA1332

PRO/E VERSION: Creo 2.0

REV A | SH 1 | DWG NO S1101MFA1332

ZIN_D_2012.frm