
DRAWING LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	S1101MFD1320	IGNITER TIP INSULATOR


COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	2	M39029/58-360	CONNECTOR CONTACT PIN, SIZE 22D, MIL-C-39029
C2	A/R	M22759/22-26-0	26 AWG WIRE, SILVER COATED STRANDED HIGH STRENGTH COPPER, FLUOROPOLYMER INSULATED, EXTRUDED TFE, BLACK
C3	A/R	1231201567	RESISTANCE HEATING WIRE, 28 AWG, KANTHAL, TYPE A-1 (HYNDMAN INDUSTRIAL PRODUCTS)
C4	A/R	DURALCO 4525	ELECTRICALLY RESISTANT EPOXY (COTRONICS CORP.)
C5	A/R	ELECTROTEMP NO. 8	HIGH TEMPERATURE CERAMIC CEMENT (SAUEREISEN)




ISOMETRIC VIEW
FOR REFERENCE ONLY
SCALE 5/1


NOTES:

1. ASSEMBLE PER APPROVED PROCESS PLAN ACME-PROP-092 FOR INITIAL BUILD.
2. MATERIAL AND PROCESS CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
3. ASSEMBLY, BONDING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1 AND NASA-STD-8739.4.
4. CRIMP ITEM C2 AND ITEM C3 INTO ITEM C1. REFERENCE THE CRIMP TOOL AND TENSILE PULL STRENGTH LIST. TENSILE PULL TEST NOT REQUIRED.
5. PERFORM CONTINUITY TESTING PER NASA-STD-8739.4 WITH CONTINUITY XXX OHMS.
6. FILL CAVITIES IN ITEM 1 WITH EPOXY AS SHOWN
7. APPLY CEMENT TO END OF ITEM 1 AS SHOWN.
8. IF REQUIRED, CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH
9. HANDLE WITH CLEAN, LINT-FREE GLOVES.
10. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

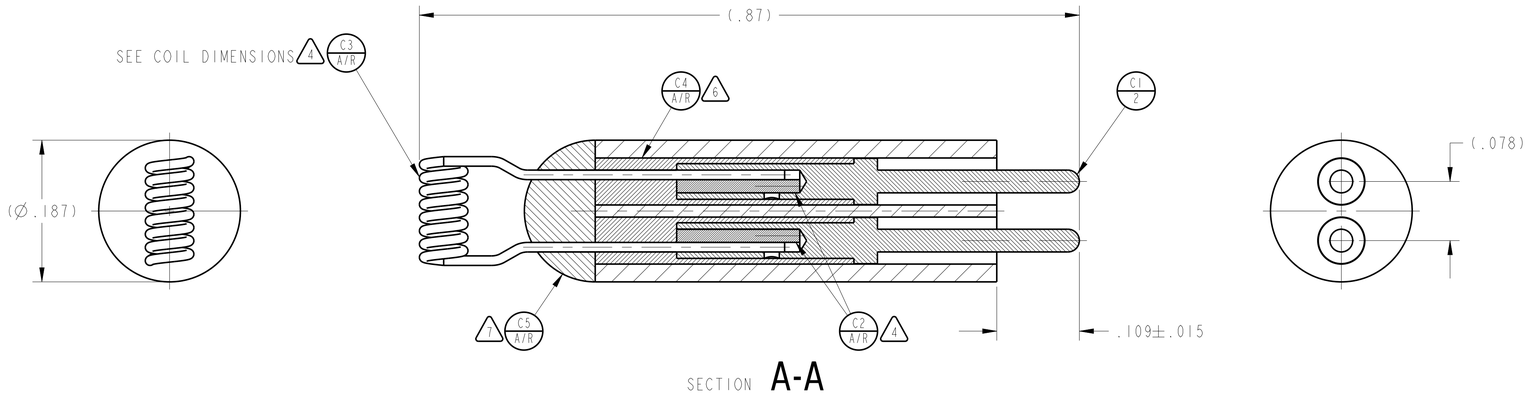

SECTION **A-A**

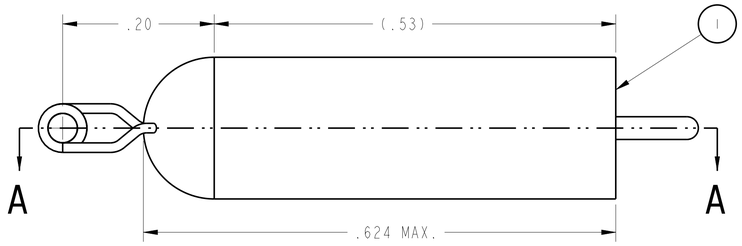

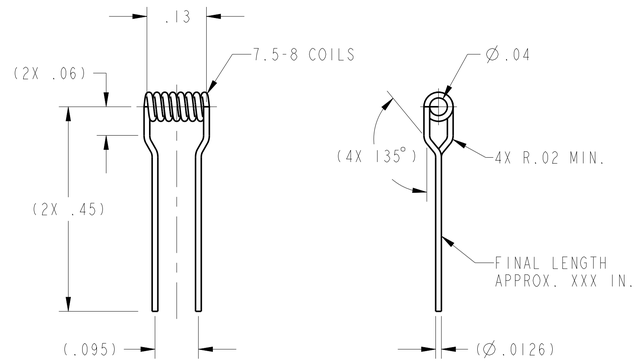

COIL DIMENSIONS
SCALE 6/1

CRIMP TOOL AND TENSILE PULL STRENGTH LIST						
PART NUMBER	MANUFACTURER	CRIMP TOOL	POSITIONER	I/E TOOL	WIRE GAGE (AWG)	TENSILE STRENGTH (LB)
M39029/58-360	QPL	M22520/2-01	M22520/2-09	I: M81969/14-01 E: M81969/14-01	28	-

REV	DESCRIPTION	APPROVED
REVISION HISTORY		

ZIN TECHNOLOGIES
6745 ENGLE ROAD, AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

S1101MFA0100
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
.X ± 0.03
.XX ± 0.01
.XXX ± 0.005
5. ANGULAR TOLERANCE ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.
APPROVED: _____
PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER		QUALITY	
REVIEWER		MATERIALS	
MECHANICAL		PROJ LEAD	
ELECTRICAL			
STRUCTURAL			
SAFETY			

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: 80GRC017F0031
PROJECT CODE: S2-229-1

TITLE
COILED IGNITER TIP ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
D	0SG68	S1101MFA1339	-

SCALE 10/1 & NOTED | INITIAL REL DATE | SHEET 1 OF 1

RELEASE LEVEL: WORKING
MODEL: S1101MFA1339

PRO/E VERSION: Creo 3.0

DWG NO S1101MFA1339 | SH 1 | REV -

ZIN_D_2017.frm