

COMMERCIAL PART LIST			
ITEM	QTY	MIL SPEC/VENDOR PART NUMBER	DESCRIPTION
C1	1	1/4-6 FHG5-S	FEMALE STRAIGHT THREAD ADAPTER NPT / SAE-ORB (PARKER)
C2	1	3-906 E1267-80	O-RING, .078 WIDE X .468 ID, EPDM (PARKER)
C3	1	51410-2-06-1-V-TF06-C-GY	QUICK-DISCONNECT NIPPLE (PREECE INC.)
C4	1	FR4L45BVBN	FLO-RITE SERIES FR4000 FLOWMETER (KEY INSTRUMENTS)
C5	2	SS-4-TA-1-2	TUBE FITTING, STAINLESS 1/4 IN. TUBE OD X 1/8 IN. MALE NPT (SWAGELOK)
C6	1	SS-8-HC-1-4	HOSE CONNECTOR, STAINLESS 1/4 IN. MALE NPT, 1/2 IN. HOSE ID (SWAGELOK)
C7	2	SS-400-8-4	TUBE FITTING, FEMALE ELBOW, STINLESS 1/4 IN. TUBE OD X 1/4 IN. FEMALE NPT (SWAGELOK)
C8	A/R	MIL-PRF-27617	KRYTOX 240AC, TYPE III LUBRICANT (DUPONT)
C9	A/R	7346A11	PIPE THREAD SEALANT TAPE, 1/4 IN (MCMASTER-CARR)

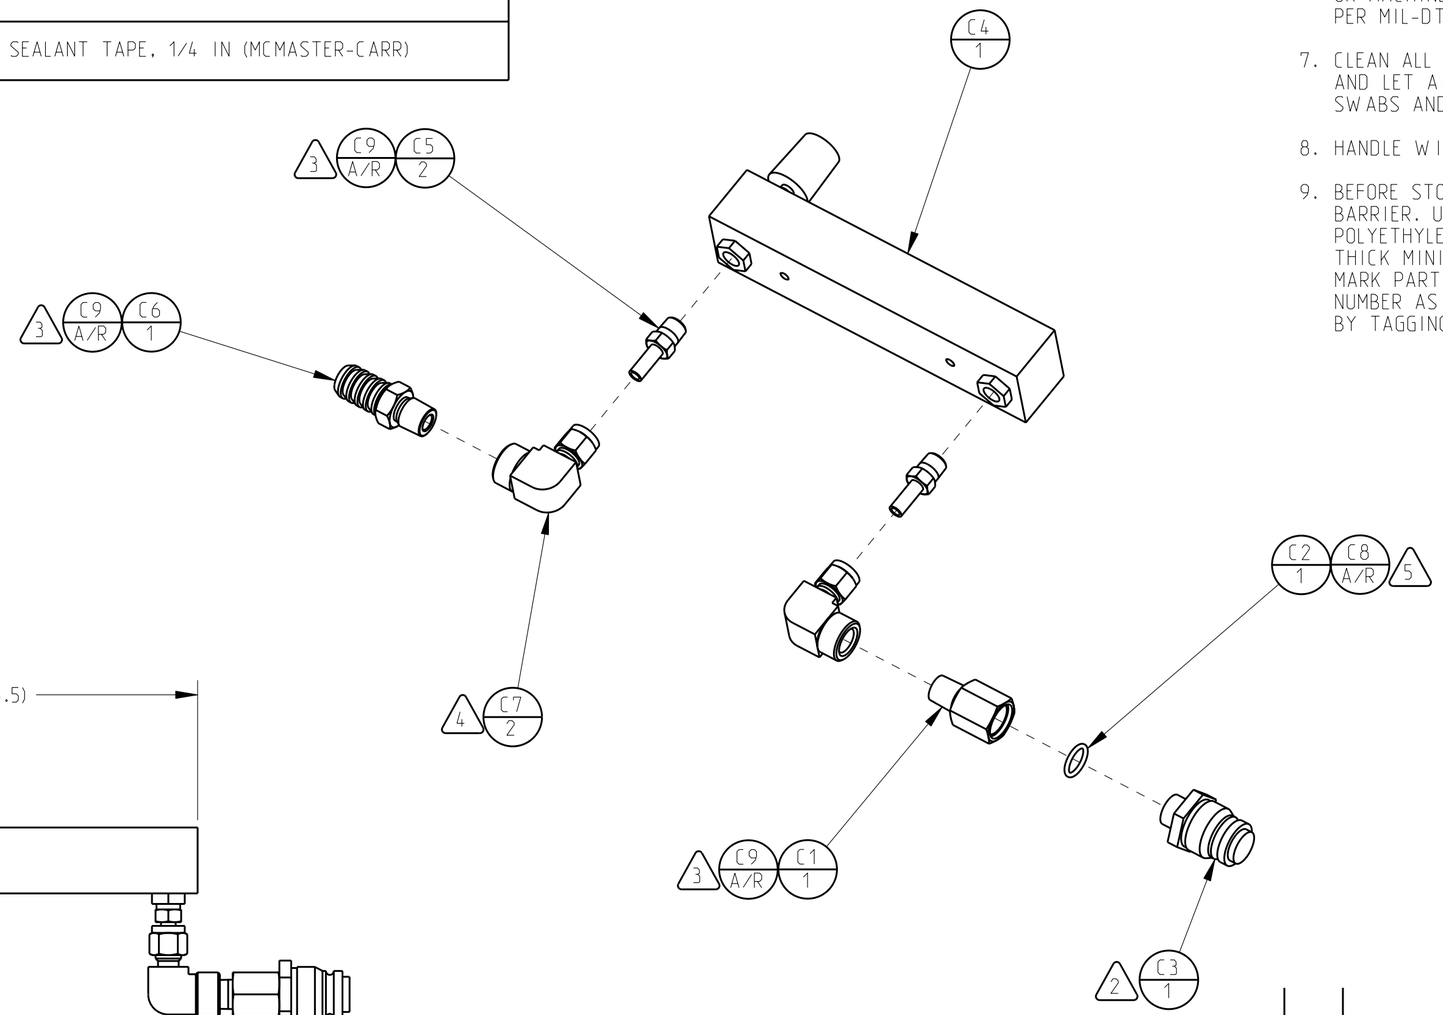

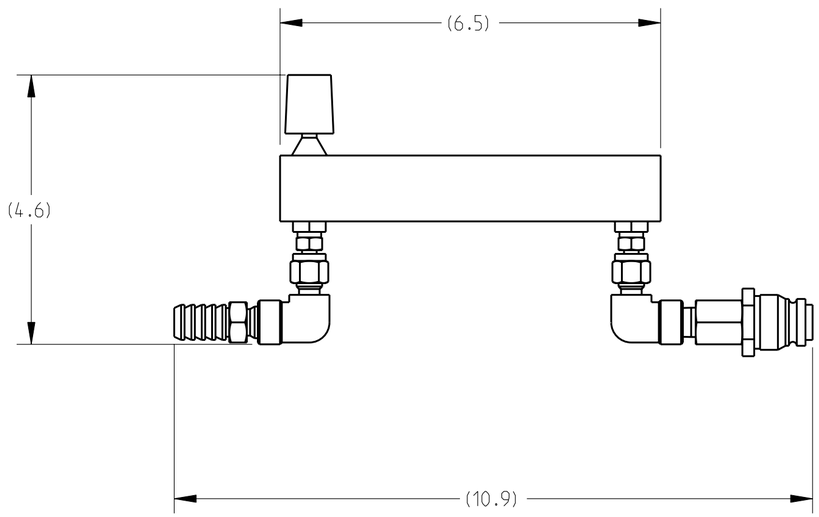

NOTES:

1. MATERIAL CERTIFICATION REQUIRED PER QUALITY LEVEL SPECIFIED IN WORK ORDER/SOW.
2. TIGHTEN FASTENERS SNUG TIGHT PER ESTABLISHED PROCEDURES.
3. APPLY TEFLON TAPE TO MALE THREADS OF PIPE FITTINGS, BEGINNING TWO THREADS FROM END OF FITTING. WRAP TAPE TIGHTLY IN DIRECTION OF THREADS 2-3 FULL WRAPS. INSTALL INTO FEMALE NPT PORTS. AFTER HAND TIGHT ENGAGEMENT, TIGHTEN 2-4 FULL TURNS.
4. TIGHTEN FLUID FITTING PER MANUFACTURER'S SPECIFICATIONS
5. APPLY THIN FILM OF LUBRICANT TO O-RING PRIOR TO INSTALLATION
6. CHEMICAL CONVERSION COAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE I, CLASS 3.
7. CLEAN ALL SURFACES WITH ISOPROPYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT-FREE CLOTH.
8. HANDLE WITH CLEAN, LINT-FREE GLOVES.
9. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. MARK PART NUMBER, A DASH, AND A SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER/SOW, BY TAGGING PER SAE-AS478-35D.

REV	DESCRIPTION	APPROVED

REVISION HISTORY

END ITEM

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± .03
   .XX ± .01
   .XXX ± .005
5. ANGULAR TOLERANCE ± .5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: *E. McCLOSKEY 04/05/16*

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	*K. BURNS 04/05/16*	QUALITY	*L. WRIGHT 04/01/16*
REVIEWER	*J. OGRIN 04/01/16*	MATERIALS	*M. WILKINSON 03/30/16*
MECHANICAL	*A. DRAKE 03/30/16*	PROJ LEAD	*B. BOROWSKI 04/04/16*
ELECTRICAL	*T. GOBELI 03/30/16*		
STRUCTURAL	*C. WERNER 04/01/16*		
SAFETY	*W. BORRELLI 03/31/16*		

DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
www.zin-tech.com

CONTRACT NUMBER: NNC14CA02C
PROJECT CODE: S2-BT3-01

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
CHILLER HOSE FLOW METER ADAPTOR ASSEMBLY

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101MGA6057	-

SCALE 1/2 | INITIAL REL DATE 04/05/2016 | SHEET 1 OF 1

RELEASE LEVEL: RELEASED
MODEL: S1101MGA6057

PRO/E VERSION: Creo 2.0

DWG NO S1101MGA6057 SH 1 REV -

ZIN_C_2012.frm