
COMMERCIAL PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
C1	2	SS-600-9	3/8 IN. TUBE 90° UNION ELBOW, 316 SSTL, SWAGELOK
C2	6	MS51830CA103L	MINIATURE INSERT, LOCKING FOR .138-32 UNJC-3A IN. FASTENER
C3	A/R	3140 RTV	SILICONE ELASTOMER, DOW CORNING
C4	A/R	3145 GRAY	RTV ADHESIVE/SEALANT, GRAY, DOW CORNING


DRAWING LIST


ITEM	QTY	DRAWING NUMBER	DESCRIPTION
1	1	S1101MFP1801	ALTERED COLD PLATE

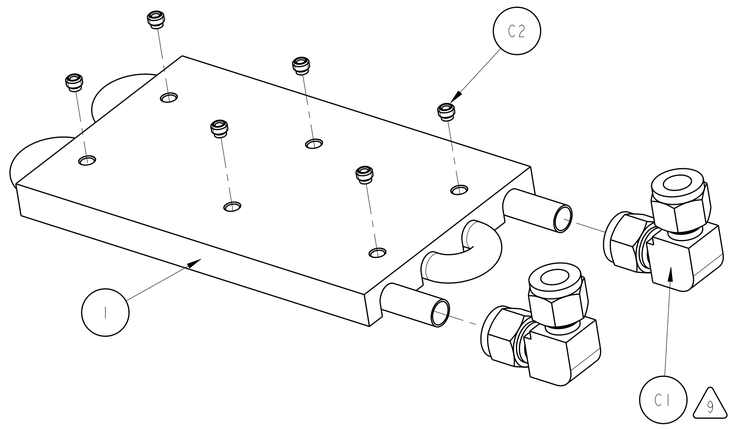


NOTES:


1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. INSTALL THREADED INSERTS PER MS51835.
3. SURFACE TREAT ANY DAMAGED OR MACHINED AREAS ON ALUMINUM PARTS PER MIL-DTL-5541, TYPE 1, CLASS 3. (GOLD COLOR) CERTIFICATE OF CONFORMANCE REQUIRED.
4. APPLY ITEM RTV TO AREAS NOTED. DRY COMPONENT THOROUGHLY BEFORE APPLYING.
5. APPLY KAPTON TAPE TO OPEN END OF FITTING TO PROTECT EXPOSED PORT FROM CONTAMINATION AND PREVENT NUT FROM ROTATING DURING HANDLING AND STORAGE.
6. CLEAN ALL SURFACES WITH ISOPROPYL OR ETHYL ALCOHOL AND LET AIR DRY. WIPE WITH CLEAN COTTON SWABS AND/OR LINT FREE CLOTH.
7. HANDLE WITH CLEAN LINT FREE GLOVES.
8. BEFORE STORAGE, PROTECT WITH CONTAMINATION BARRIER. USE CLEAN, NEW, TRANSPARENT POLYETHYLENE BAG FOR SMALL ITEMS OR 4 MIL THICK MINIMUM POLYETHYLENE SHEET AND SEAL. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER PER SAE AS478, METHOD 35.
9. INSTALL C1 FITTINGS PER MANUFACTURER RECOMMENDATIONS.
10. USE C4 RTV TO SEAL ENDS OF EACH CHANNEL TO PREVENT C3 RTV FROM LEAKING OUT.
11. FIL ENTIRE CHANNEL WITH C3 RTV ONCE ENDS ARE CAPPED.

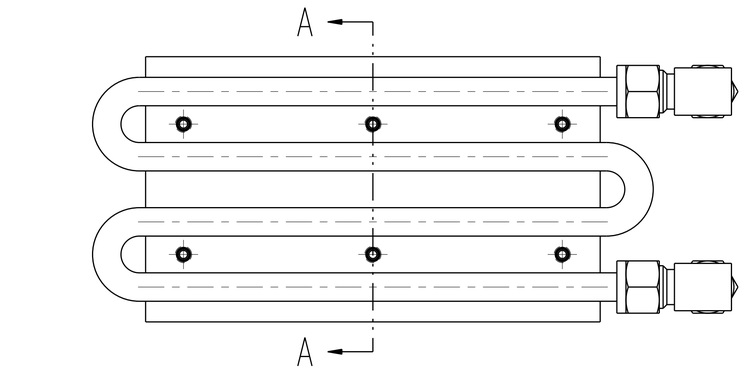



SECTION A - A

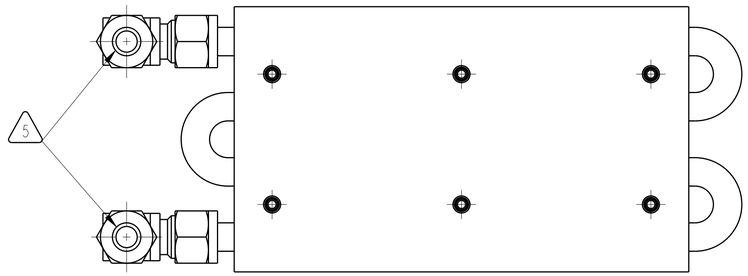

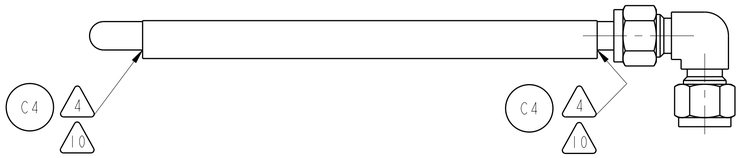

CHG	ZONE	DESCRIPTION	APP/DATE
B		INCORPORATED ACME-ECO-427	AD 6/22/16 JO 6/23/16 AR 6/24/16
A		INCORPORATED ACME-ECO-370	KR 9/17/14 GF 9/19/14 AD 9/18/14

REVISIONS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			
TOLERANCE ON			
.X	± 0.03	PROJECT LEAD	B. BOROWSKI 02/22/11
.XX	± 0.01	QUALITY	W. BORRELLI 02/22/11
.XXX	± 0.005	SAFETY	W. BORRELLI 02/22/11
FRACTION	± -	ENGINEER	A. DRAKE 02/18/11
ANGULAR	± 0.50°	DESIGNER	G. FEDEVICH 02/18/11
BREAK EDGES N/A		REVIEWER	M. PREVITE 02/18/11

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
DELIVERY ORDER: SPACE 110
MODEL NAME: S1101MFA1800

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E.MCCLOSKEY DATE: 6/23/16

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

ACME CHAMBER INSERT ASSEMBLY,
S1101MFA0003

COLD PLATE ASSEMBLY

SIZE	DRAWING NUMBER	REV	BLDG	AREA
D	S1101MFA1800	B	ZIN	GRC

UNITS: INCH

SCALE:	INITIAL REL DATE	SHEET	DISCIPLINE
1/1	02/22/2011	1 OF 1	MECHANICAL

PRO/E VERSION: Wildfire 2.0

SIZE D DRAWING NUMBER S1101MFA1800 REV B