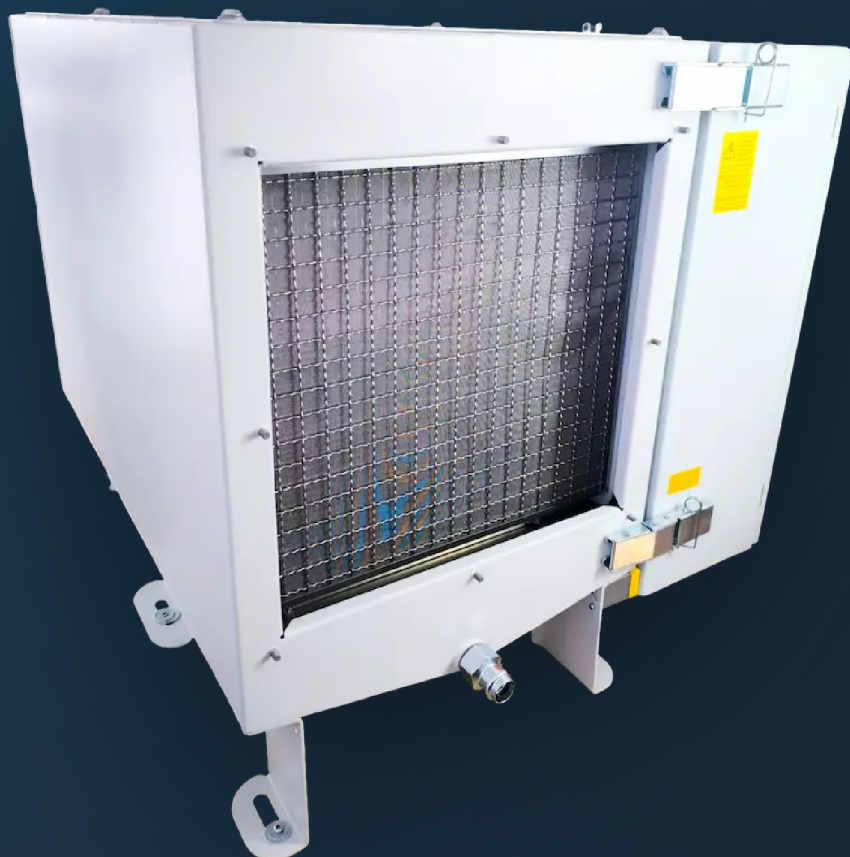


PRODUCT CATALOG

ECO AIR CLEANER Mechanical Oil Mist Separator

Self-cleaning oil mist separation engineered for machine tools and industrial processes — constant performance, low maintenance, decentralized by design.

**99.95%**

particle capture with
optional HEPA attachment

1200–1500

m³/h airflow, Eco Air
Cleaner series

IE3

energy-efficient 1.5 kW
drive

Clean air, by design.

Emifree, based in Berlin, develops technological solutions in air filtration, oil mist separation, and energy efficiency. The trust our national and international customers place in our products confirms the high quality standards we set for ourselves — and it's why we're ready to work with you.



Why it matters


Contemporary environmental conditions demand sophisticated solutions for good air quality at the industrial workplace. Oil mist doesn't just affect health — it affects occupational safety. That's the challenge we take on with you.



Where we work

Thanks to their decentralized architecture and automation, our filtration solutions are widely used in the automotive industry — particularly around machine tools — as well as in pharmaceuticals and chemicals.

Through continuous development in **intelligent control technology**, our products achieve a high degree of innovation — built for decentralized, low-maintenance operation.

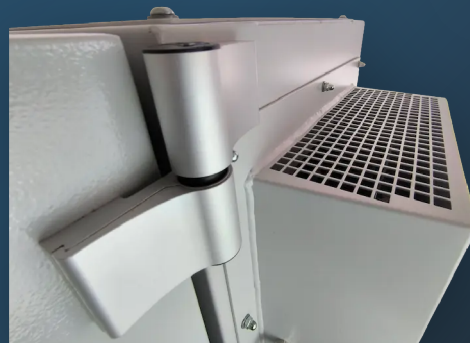

Eco Air Cleaner

Mechanical Oil Mist Separator

To meet the demands for low maintenance and automation, we developed the Eco Air Cleaner oil mist separator with self-cleaning technology. Its compact design and compatibility with industrial protocols make it the ideal solution for working directly with machine tools.

Eco Air Cleaner — Advanced Version



01 Automatic self-cleaning system

Guarantees constant extraction performance for low maintenance costs — the core innovation behind every unit.

03 Recirculation & energy efficiency

Recirculation mode and highly energy-efficient components lower your operating costs.

05 PROFIBUS / PROFINET ready

Compatible with industrial communication standards so you can network our systems with other machines.

02 Long service life filter materials

Sustainable production with reduced costs, thanks to durable filter media engineered to last.

04 Decentralized architecture

Simplifies installation for both new installations and retrofits — install exactly where you need it.

06 Real-time monitoring

Live parameter monitoring prevents unexpected downtime and extends the life of your machine.

Engineered to clean itself.

Every Eco Air Cleaner is built around an automatic self-cleaning system: precision nozzles rinse the separation media at defined intervals, restoring performance without dismantling the unit or halting production. This is the feature that sets emifree apart — constant separation rates without the labor.



Cleaning nozzles rinse the media surface automatically, restoring the **coalescence effect** without removing the module.

COALESCENCE EFFECT

Turbo Fan

The unique design of our turbo fan lets small oil particles enlarge, so they can be separated and recycled.

CONSTANT PERFORMANCE

No Drop-off

While conventional systems lose separation rate over time, the self-cleaning system keeps performance level.

MAINTENANCE

Automatic

Forget about frequent manual maintenance work — lower your expenses while extraction stays constant.

Eco Air Cleaner 1200 / 1500 m³/h

EAC12-2 / EAC15-2 — Basic, Advanced & Premium versions, with optional HEPA attachment

VERSION	BASIC	ADVANCED	PREMIUM	+ HEPA
Designation	EAC12-2 / EAC15-2	+ CS-X-X	+ CS-C-F	—
Dimensions [L×W×H]	818 × 466 × 566 mm			818 × 470 × 961 mm
Airflow	up to 1200 / 1500 m³/h			—
Electrical	3-Ph. 400 V · 50/60 Hz			—
Power	1.5 kW (IE3)			—
Current	2.3 A			—
Protection class	IP54			—
Noise level	70 dB			—
Pipe connection	DN 200 mm (opt. DN 150 mm)			—
Standard color	RAL 9002 (opt. other RAL colors)			—
Weight	94 / 95 kg	95 / 96 kg	110 / 111 kg	+ 20 kg
Pre-filter	✓	✓	✓	—
Cleaning system	—	✓	✓	—
Advanced control system	—	—	✓	—
Frequency converter	—	—	✓	—

Basic Version

Simple oil mist separation with pre-filter
— the entry point for machine-tool
extraction.

Advanced Version


Adds the integrated self-cleaning system
for constant separation rates and lower
maintenance.

Premium Version

Full automation — PROFINET, HMI
panel, and frequency converter for
demand-oriented control.

Dimensions & Installation

Eco Air Cleaner 1200 / 1500 m³/h — key measurements at a glance

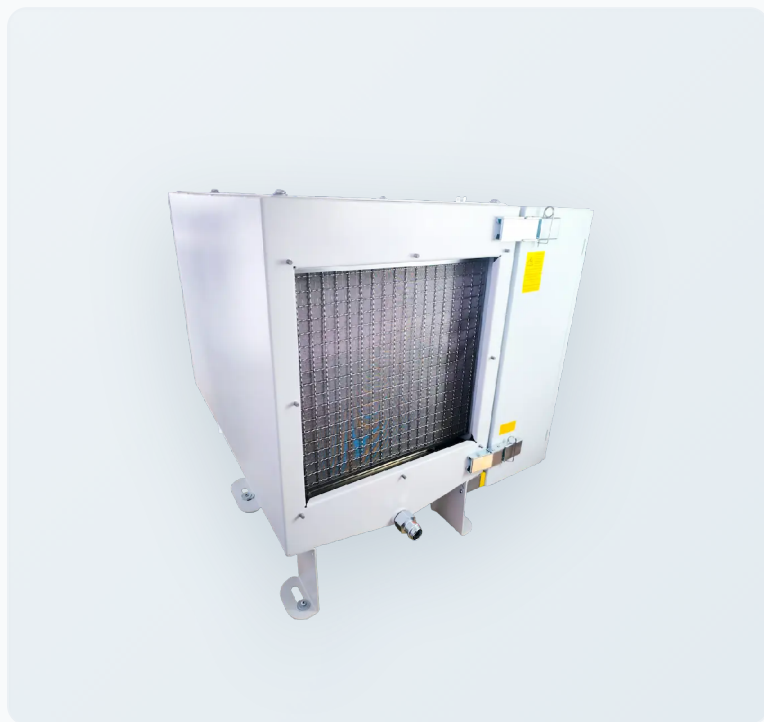

Airflow	up to 1200 / 1500 m ³ /h
Pipe connection	DN 200 mm (opt. DN 150 mm)
HEPA filtration	≥ 99.95% at 0.3 μm
Standard color	RAL 9002
Lifting	4 × M10 lifting hooks
Dimensions [L×W×H]	818 × 466 × 566 mm

The HEPA attachment mounts directly on the Eco Air Cleaner housing — 818 × 470 × 961 mm with the attachment fitted — and includes an analog differential pressure gauge (optional electronic), so the filter is changed only when it's truly necessary.

Installation footprint

Compact 818 × 466 mm base with four M10 lifting hooks for straightforward crane or forklift handling on site.

Connections

Raw gas in, clean gas out via DN 200 mm pipework; oil return via external thread G 3/4"; solenoid valve port G 1/4".

Control cabinet

Premium version integrates the control cabinet and H-B6 interface directly on the housing for a single-footprint install.

Everything for a complete installation.

Beyond the Eco Air Cleaner itself, we offer a full range of accessories and services to get your filtration system running — and keep it running.

HEPA insert

For high filtration requirements, the HEPA attachment removes at least 99.95% of particles down to 0.3 μm — paired with a differential pressure gauge so you only change the filter when necessary.

Intake boxes & flanges

Serve as interfaces for installation, connecting the Eco Air Cleaner cleanly to your existing extraction points.

Frames & columns

Allow the system to be mounted in various positions, adapting to the layout of your shop floor.

Other accessories complete every installation: vibration dampers, welded pipes, flexible hoses, ring seals, and clamping rings.

● Installation & Commissioning

Delivered alongside your machine, tailored to your specific application.

● Energy Efficiency Optimization

Sizing, operating-point determination, and demand-oriented electronic control.

● Measurements & Aerosol Analysis

Flow and volumetric measurements to correctly select the right filtration solution.

● Consulting

We collaborate on process optimization and look forward to new challenges with you.

emifree

Clean air isn't a luxury —
it's a standard.

COMPANY

Emifree GmbH
Production of Filtration
Systems

ADDRESS

Pestalozzistraße
13
12557 Berlin,
Germany

CONTACT

+49 30 76283520
info@emifree.com

WEB

www.emifree.com

