

Real-Time Impact Point Prediction of Suborbital Rockets Using Kalman Filtering


Emil Killingberg Jensen, Kristoffer Gryte

emilkj@stud.ntnu.no | kristoffer.gryte@ntnu.no
Department of Engineering Cybernetics, NTNU

Motivation

Rocket launch rates are rising. Recovering payloads and first stages using autonomous recovery vehicles (ARVs) reduces cost, human exposure, and environmental footprint. The challenge is knowing where the rocket will land *before it gets there*.

Impact point prediction (IPP) is the real-time estimate of the rocket's landing location and uncertainty, updated continuously from onboard sensor data. An ARV steers to this estimate.

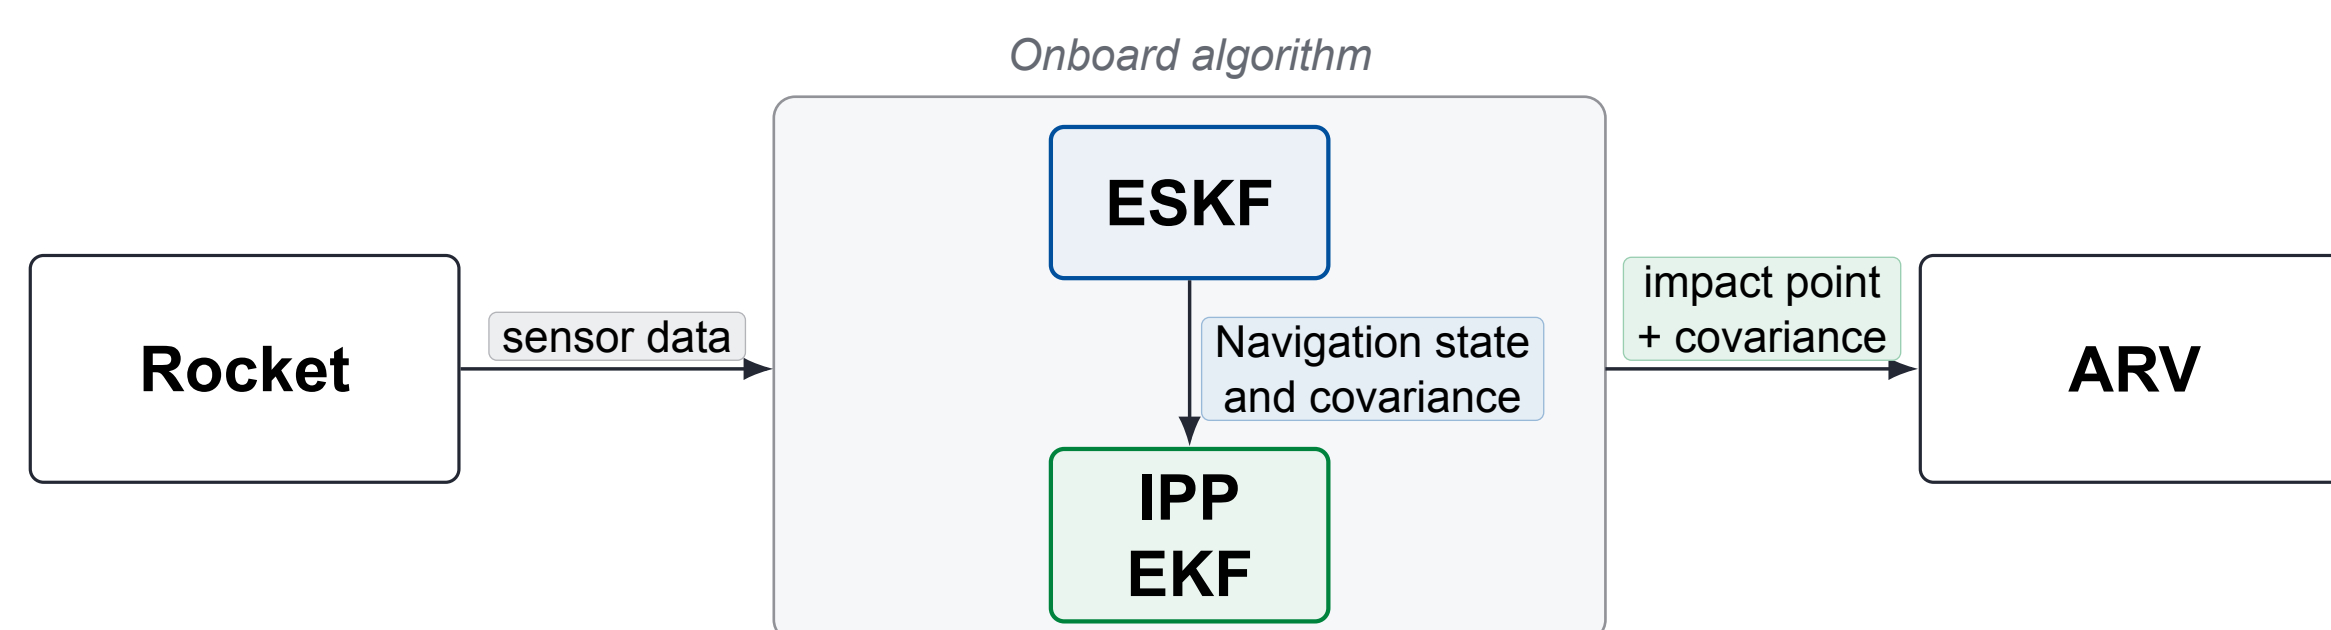

System & Method

Navigation — Error-State Kalman Filter (ESKF)

The ESKF maintains a continuous estimate of position, velocity, attitude, and sensor biases. IMU measurements propagate the state at high rate. GNSS, barometer, and magnetometer measurements then correct it via the error-state injection scheme [3]. The filter outputs a full state vector *and covariance* that are passed directly as the initial condition for the IPP filter.

Impact Point Prediction — Cartesian EKF

The IPP filter propagates a Cartesian state $\mathbf{x} = [\mathbf{p}^T, \mathbf{v}^T]^T$ in NED coordinates forward until altitude reaches sea level:

$$\dot{\mathbf{p}} = \mathbf{v}, \quad \dot{\mathbf{v}} = \mathbf{g} - K_D \mathbf{v}_a + \mathbf{R}(\hat{\mathbf{q}}) \mathbf{T}_b, \quad K_D = \frac{\rho C_D A \|\mathbf{v}_a\|}{2m}$$


$\mathbf{v}_a$ airspeed vector, ρ air density, C_D drag coefficient, A reference area, m mass. $\mathbf{R}(\hat{\mathbf{q}})$ rotates the body-frame thrust $\mathbf{T}_b$ to NED using the ESKF attitude quaternion $\hat{\mathbf{q}}$.

The equations are propagated forward until the predicted altitude reaches sea level, yielding a predicted impact point and propagated uncertainty ellipse updated in real time.

Component	Key design choice
ESKF	Fuses GNSS, barometer, and magnetometer
IPP	Forward propagation of position and velocity using EKF equations
Interface	IPP re-initialised from ESKF state and covariance at each GNSS update

Results: Real-Flight Validation

The figure compares horizontal IPP error from a real Andøya student-rocket launch against a representative simulated trajectory. The two are distinct flights — the comparison shows that the error characteristics seen in simulation transfer to the real-flight setting.

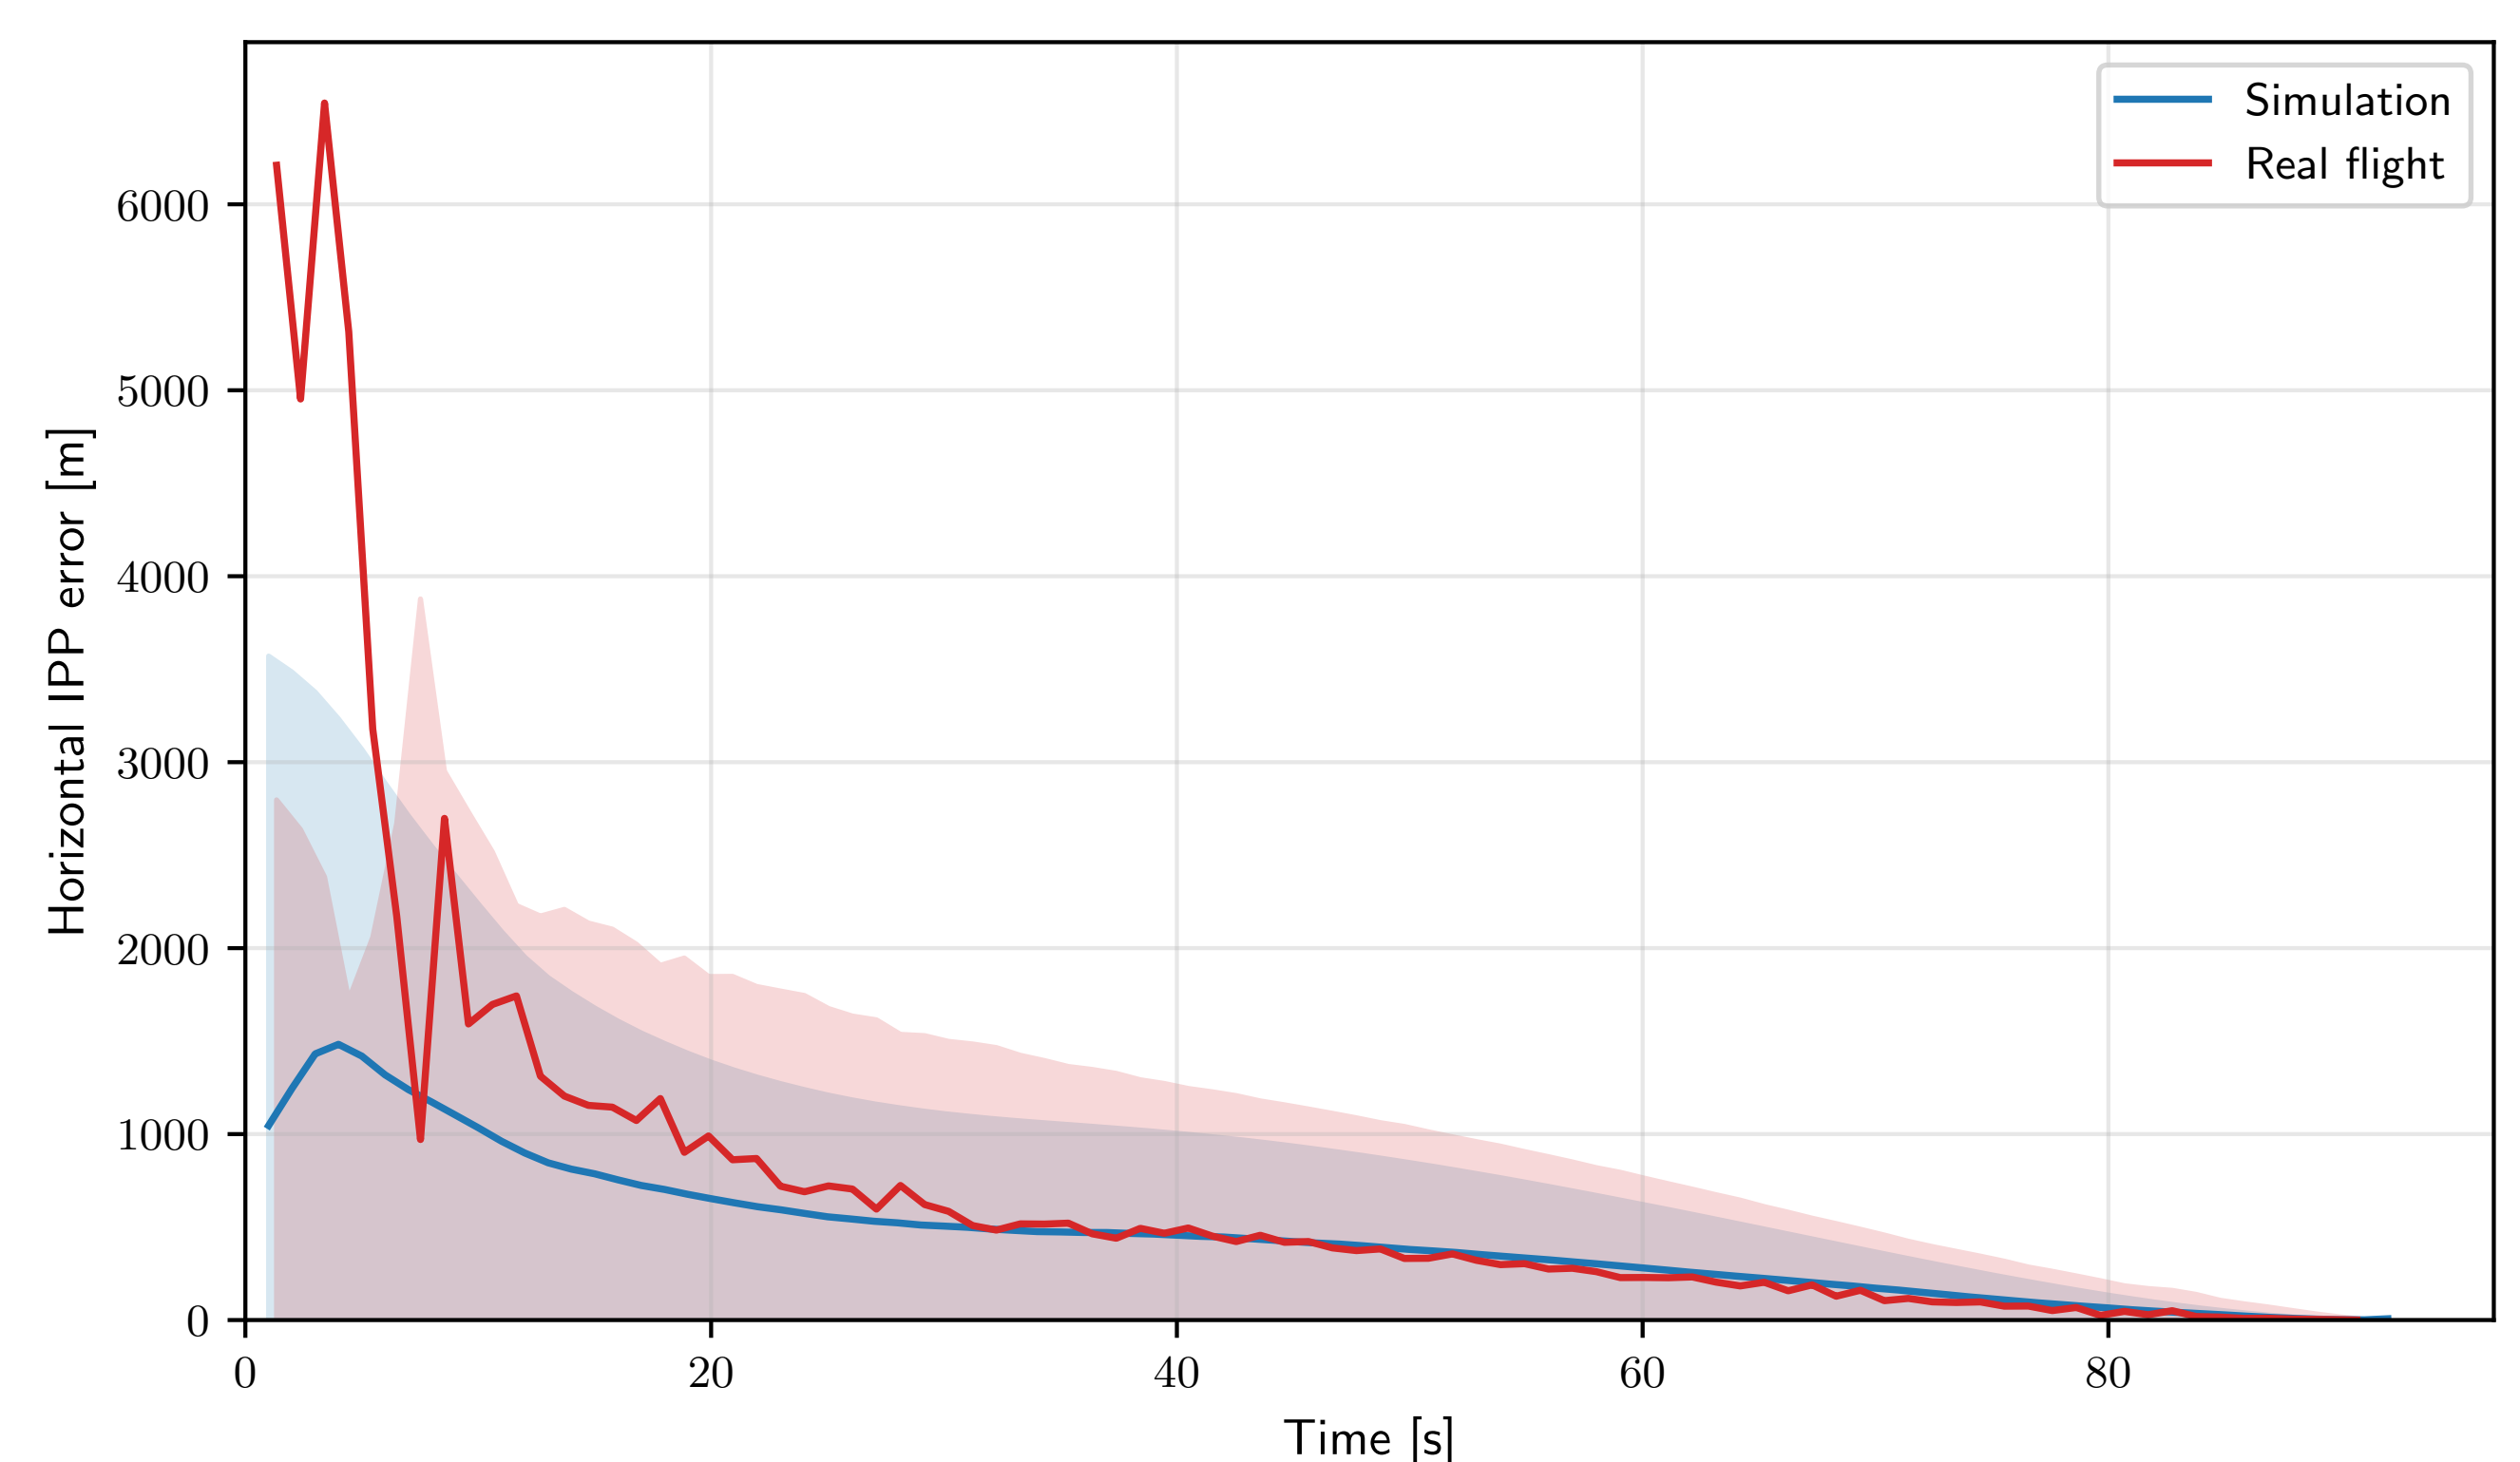

During the powered phase ($t \lesssim 10$ s) the prediction carries high uncertainty due to gyroscope saturation from peak spin rates. After motor burnout, the filter produces stable predictions with low and well-bounded horizontal error throughout the full 80 s descent to splashdown.

Challenges & Outlook

- **Powered-phase limitation:** peak spin rate of ≈ 113 rad/s exceeds the gyroscope range, saturating the IMU during boost. A higher-range gyroscope and repositioning the IMU closer to the spin axis would address this.
- **Wind and drag uncertainty:** real-time wind estimation and in-flight drag identification remain open problems for operational use.
- **Known mass and thrust:** the IPP model treats vehicle mass and thrust as deterministic inputs. Propellant burn-off and thrust variations introduce unmodelled uncertainty that limits pre-burnout accuracy; in-flight parameter estimation would address this.
- **Scaling to orbital recovery:** the ESKF–Cartesian architecture requires only higher-grade inertial sensors and a longer propagation horizon to support autonomous ship pre-positioning before first-stage splashdown.

References

- [1] K. Gryte et al. *Recovery of Rocket Payloads and First Stages Using Unmanned Vehicles*. IEEE Aerospace Conference, 2025.
- [2] A. Meta. *Impact Point Prediction of High-Power Rockets and Sounding Rockets*. M.Sc. Thesis, NTNU, 2025.
- [3] E. K. Jensen. *Impact Point Prediction of High-Power Rockets and Sounding Rockets*. M.Sc. Thesis, NTNU, 2026.