



Prototype PINN subsonique | M=0.000

Mode PINN pour $\alpha = 0.050$

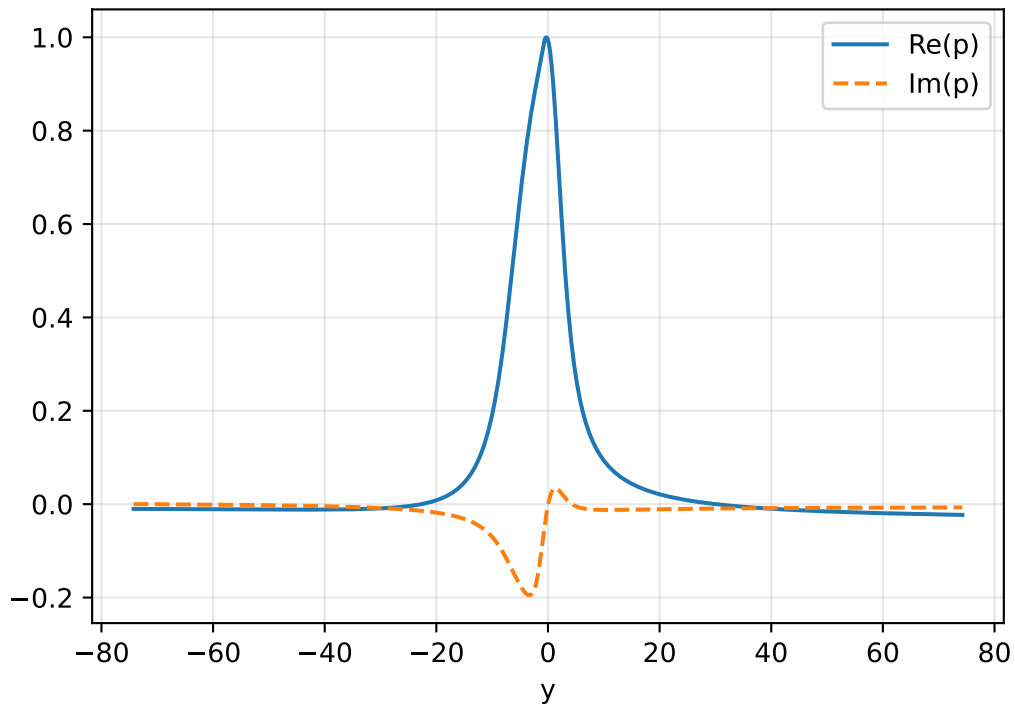


$c_i^{PINN} = 0.87808$, $c_i^{ref} = 0.91465$

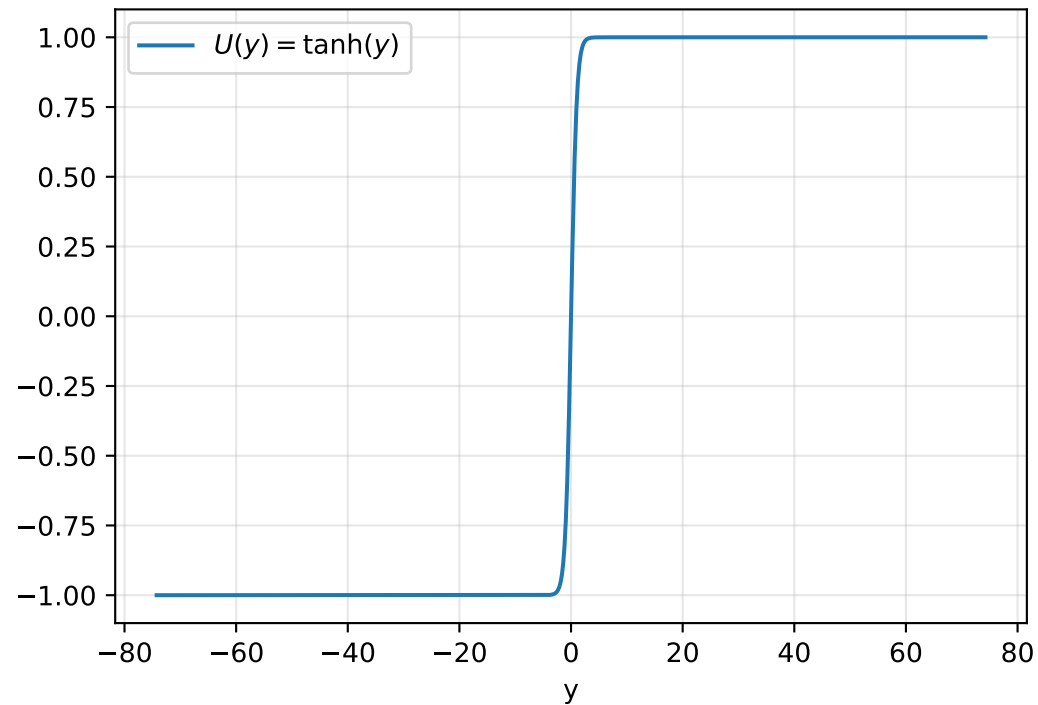


Prototype PINN subsonique | $M=0.000$

Mode PINN pour $\alpha = 0.100$

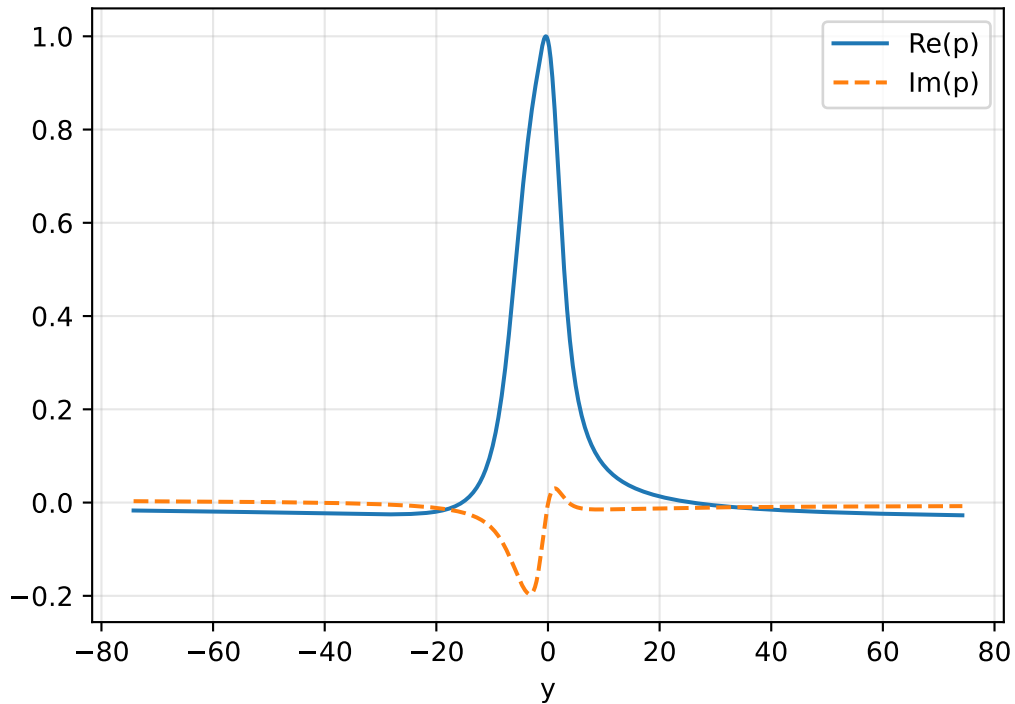


$c_i^{PINN} = 0.82096$, $c_i^{ref} = 0.83643$

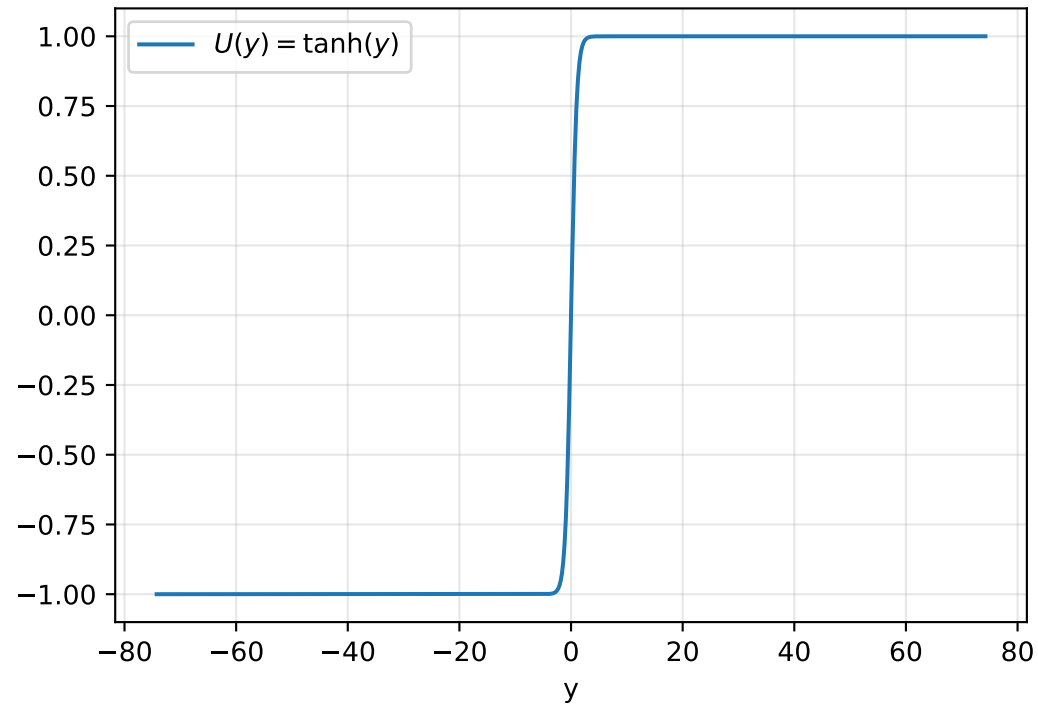


Prototype PINN subsonique | $M=0.000$

Mode PINN pour $\alpha = 0.300$

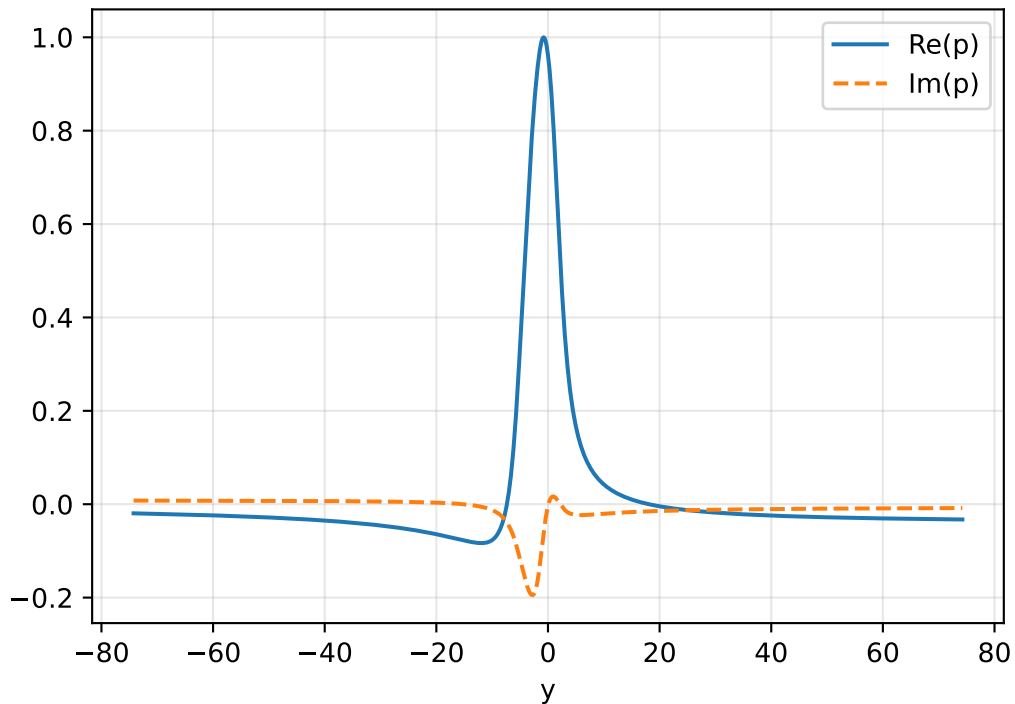


$c_i^{PINN} = 0.59372$, $c_i^{ref} = 0.57690$

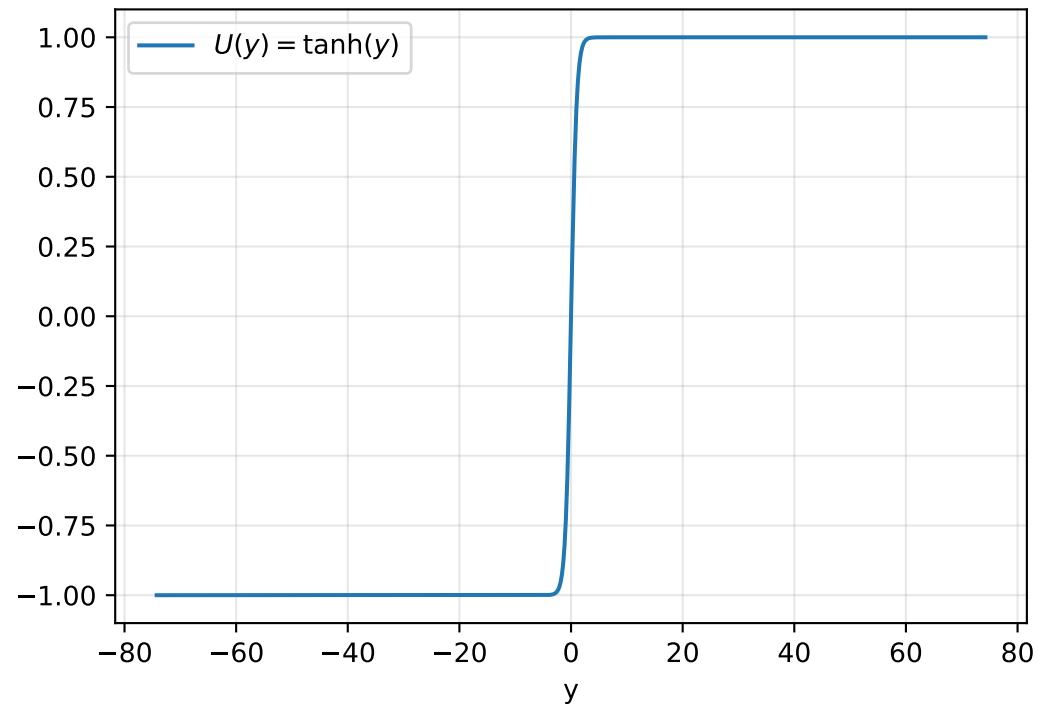


Prototype PINN subsonique | M=0.000

Mode PINN pour $\alpha = 0.500$

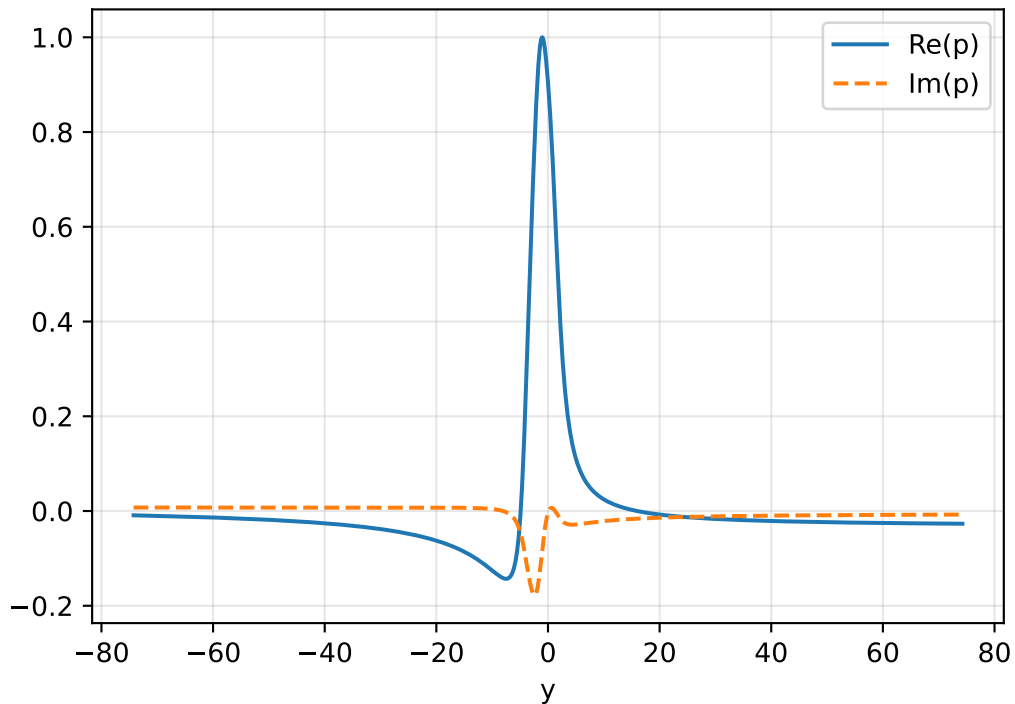


$c_i^{PINN} = 0.38038, c_i^{ref} = 0.37500$

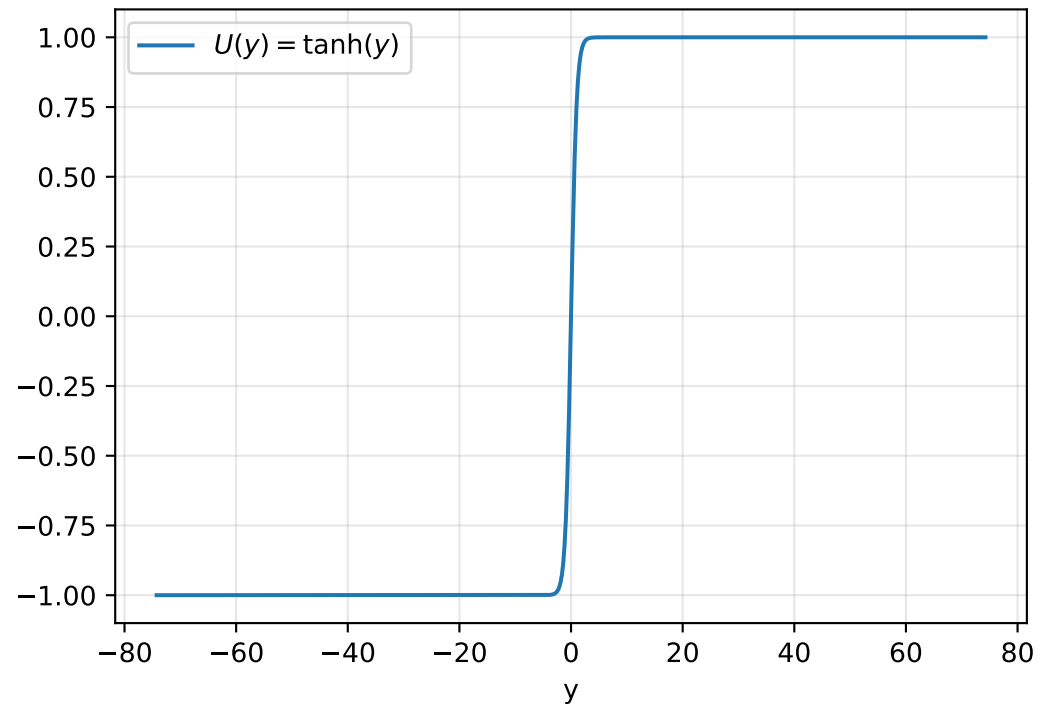


Prototype PINN subsonique | $M=0.000$

Mode PINN pour $\alpha = 0.700$

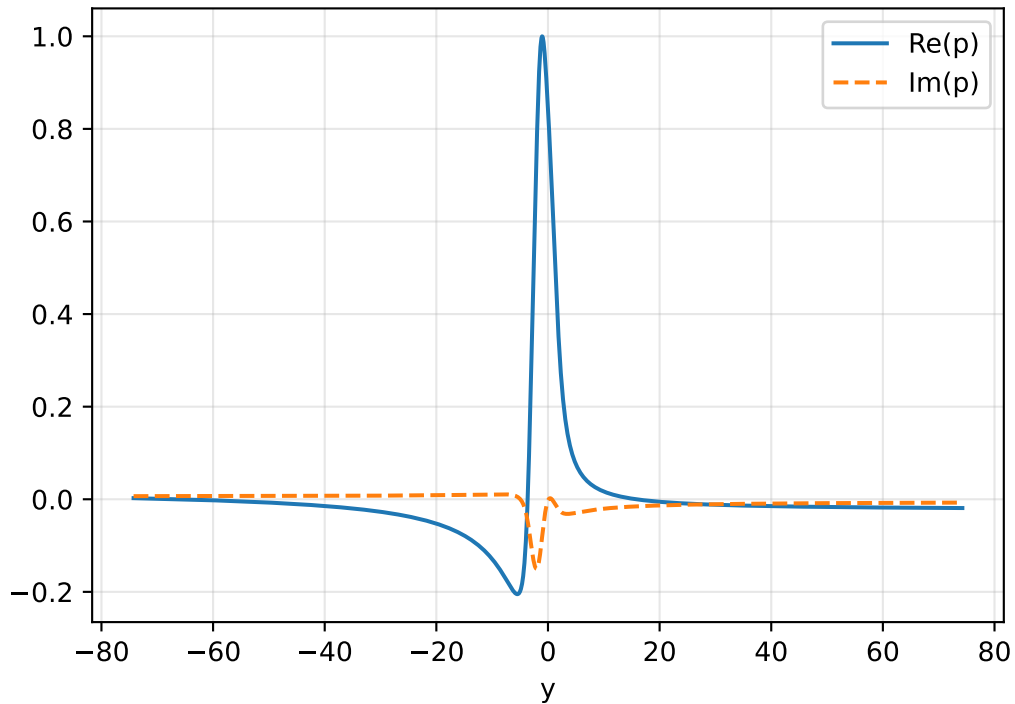


$c_i^{PINN} = 0.20189$, $c_i^{ref} = 0.20864$

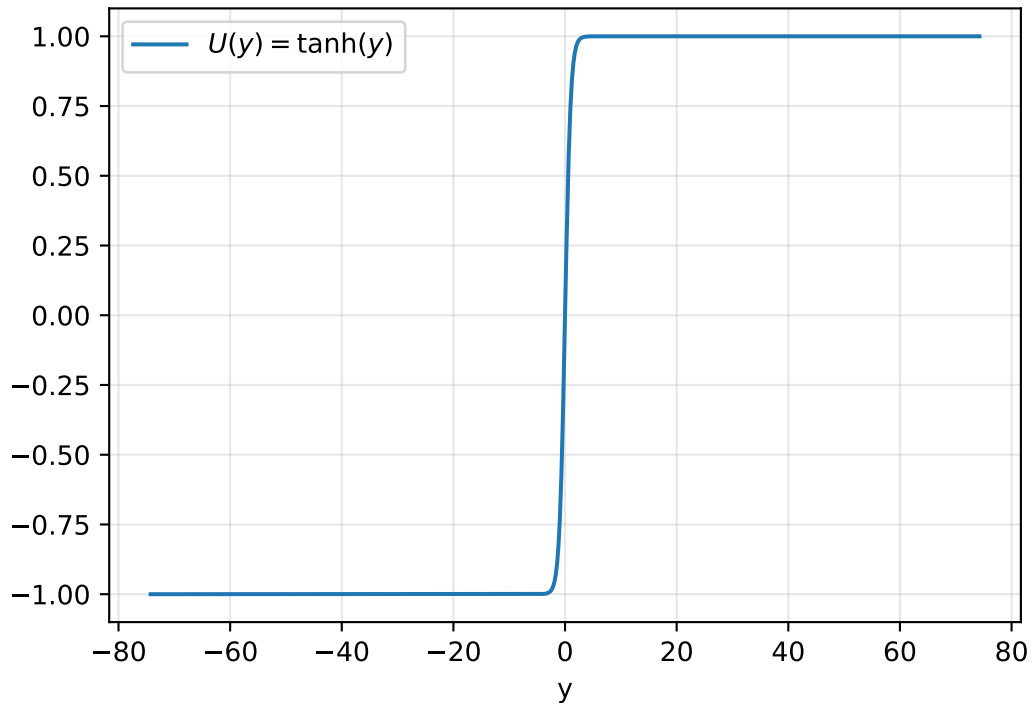


Prototype PINN subsonique | M=0.000

Mode PINN pour $\alpha = 0.800$

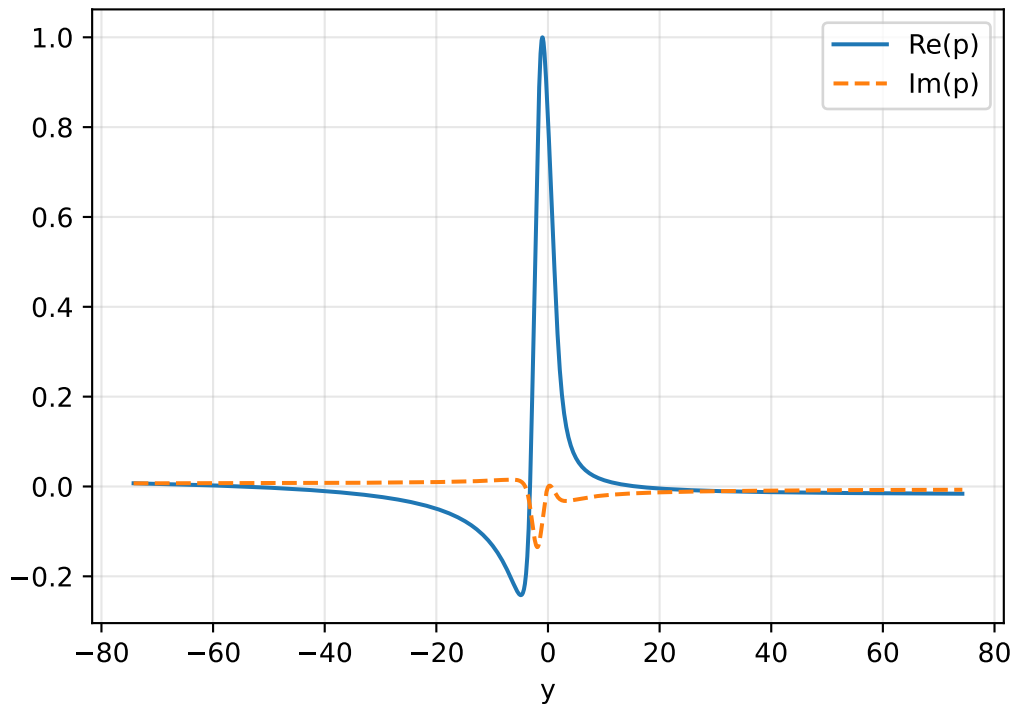


$$c_i^{PINN} = 0.13548, c_i^{ref} = 0.13466$$

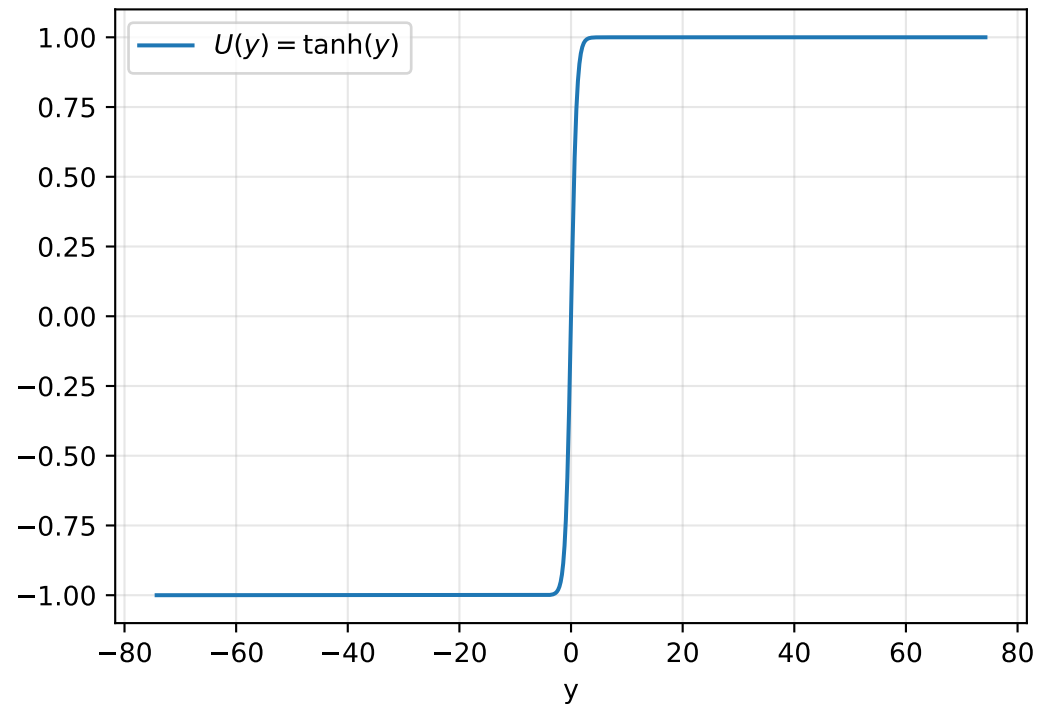

Prototype PINN subsonique | $M=0.000$

Mode PINN pour $\alpha = 0.850$

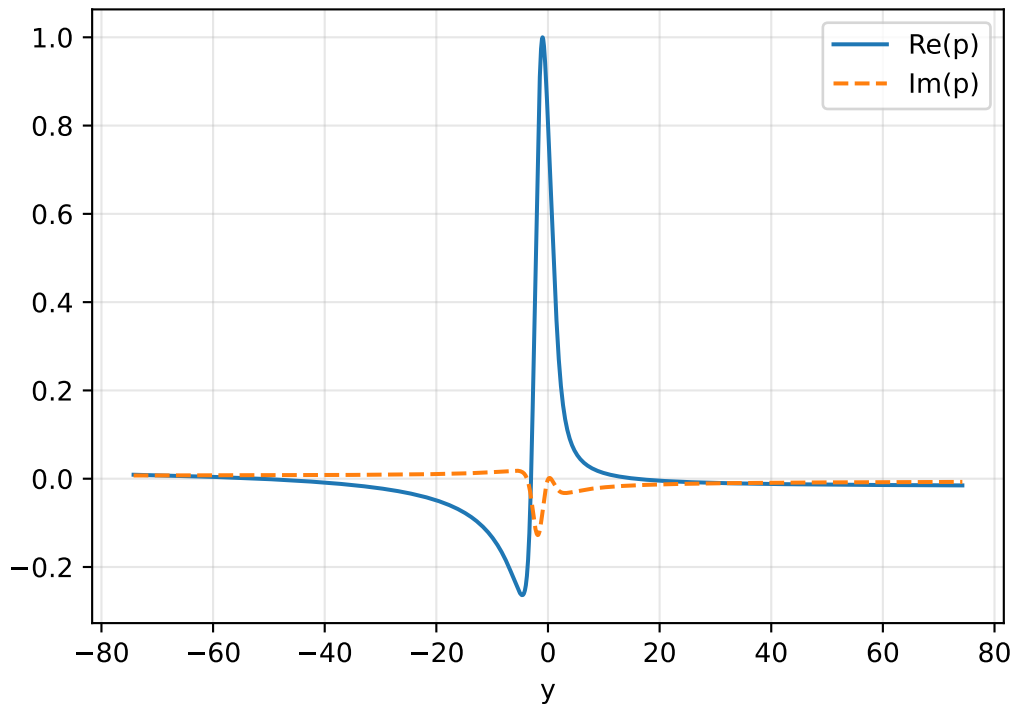

$c_i^{PINN} = 0.10939$, $c_i^{ref} = 0.09951$

