



Prototype PINN subsonique | $M=0.300$

Mode PINN pour $\alpha = 0.050$

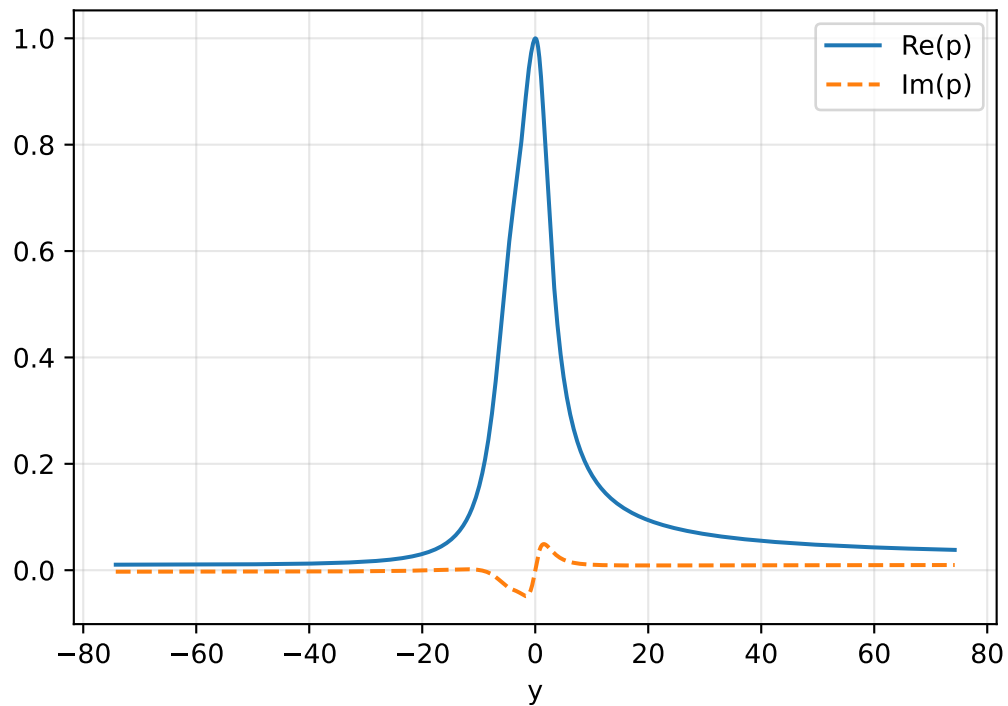


$c_i^{PINN} = 0.82688$, $c_i^{ref} = 0.84137$

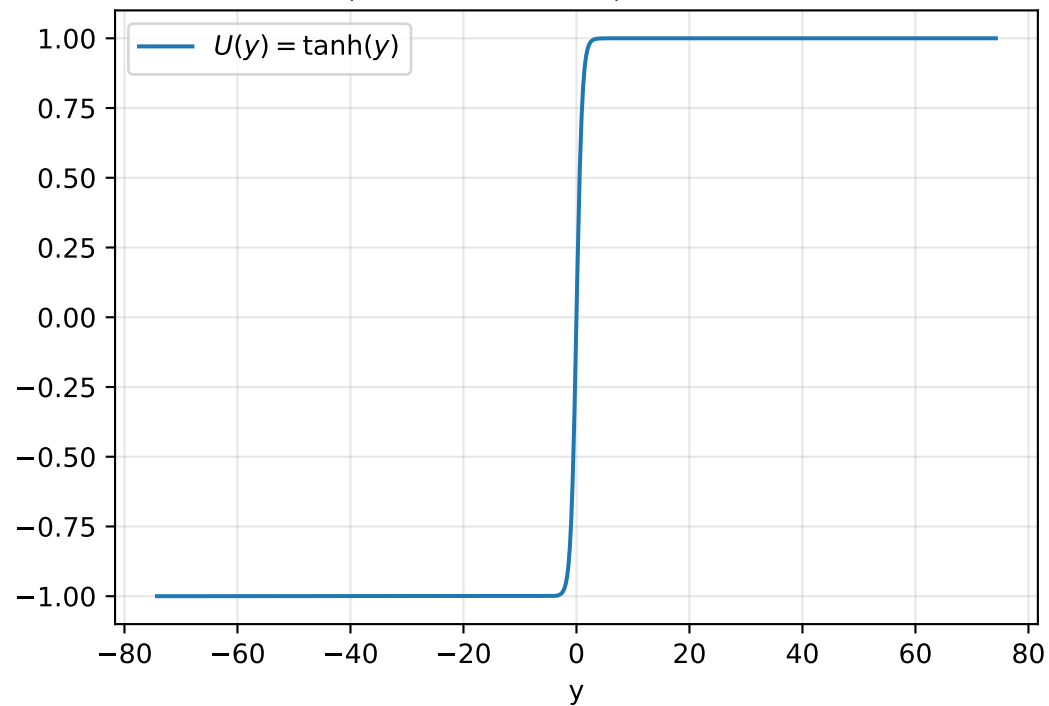


Prototype PINN subsonique | $M=0.300$

Mode PINN pour $\alpha = 0.100$

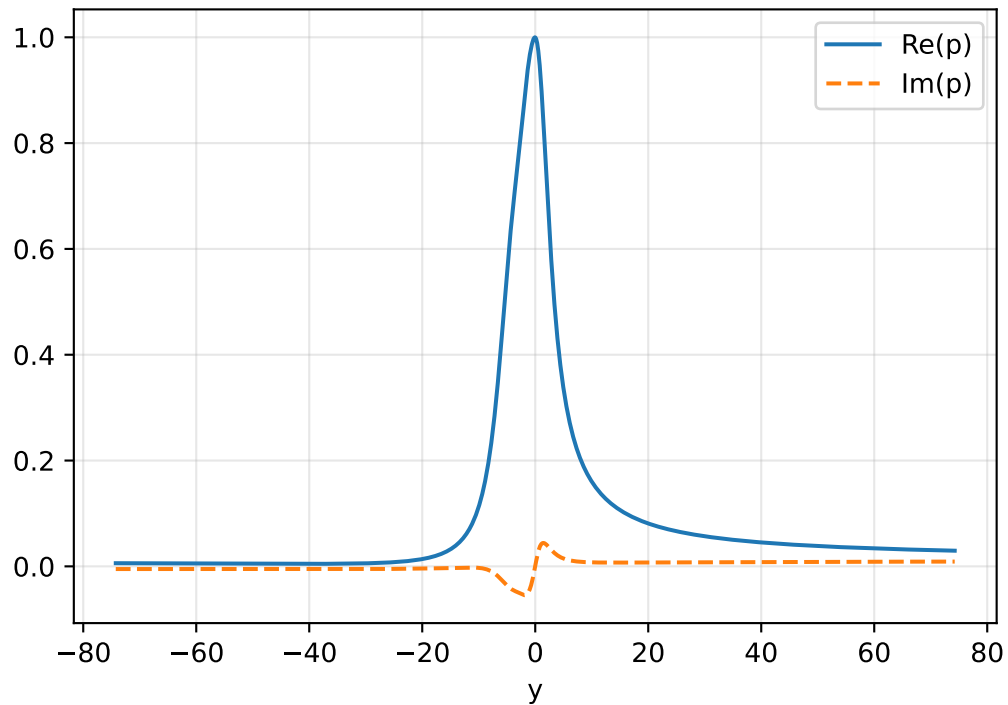


$$c_i^{PINN} = 0.76386, c_i^{ref} = 0.76908$$

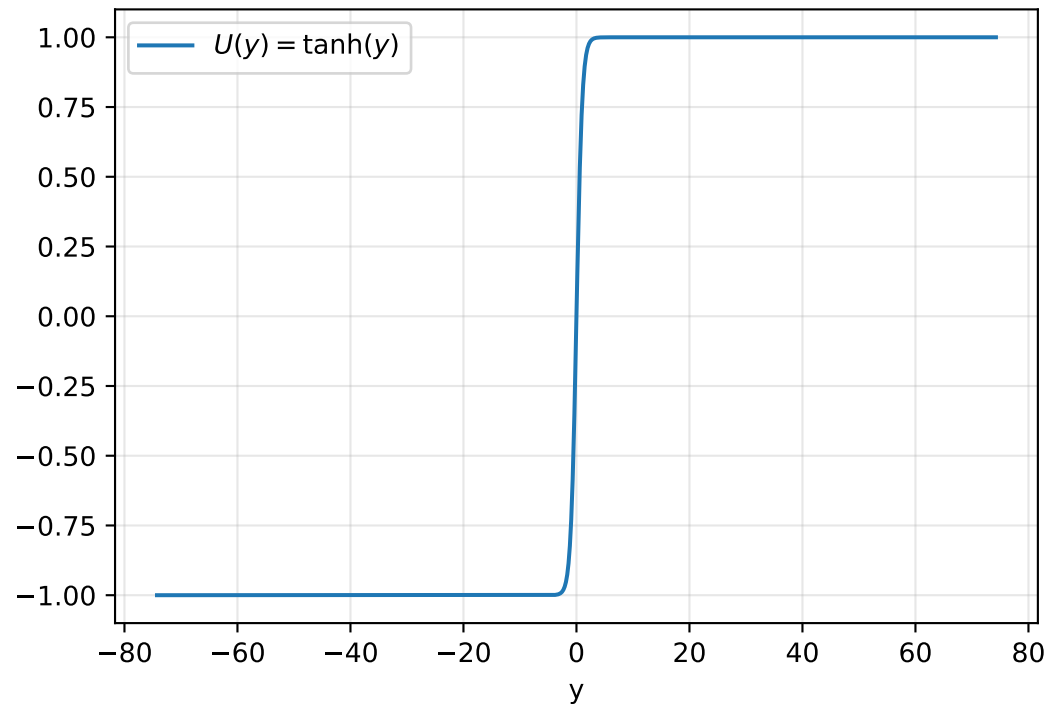


Prototype PINN subsonique | M=0.300

Mode PINN pour $\alpha = 0.300$

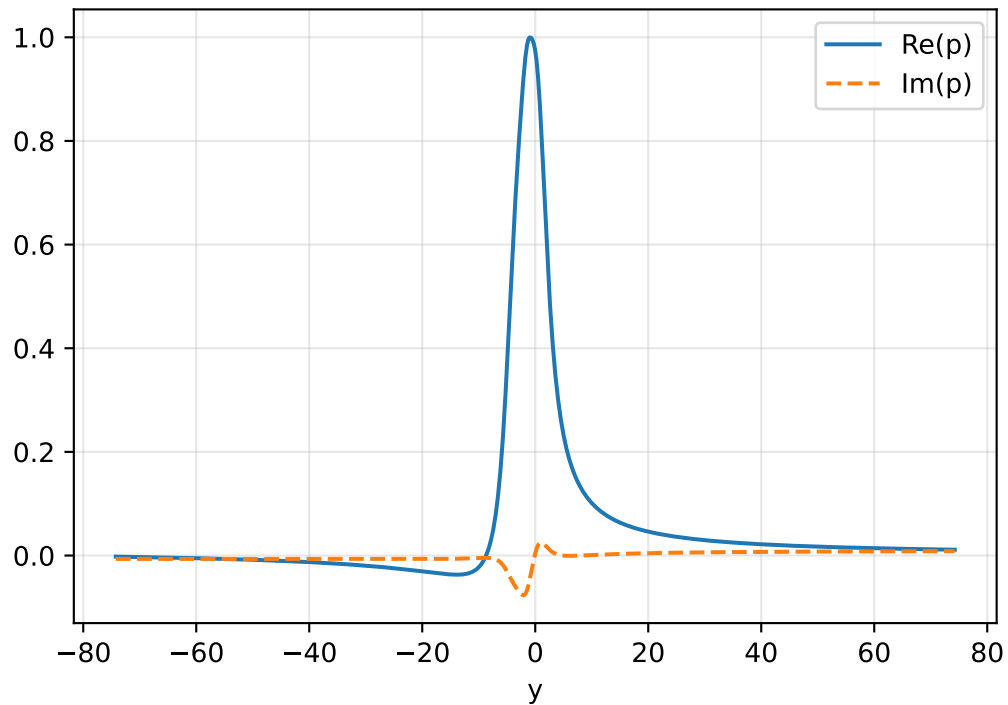


$$c_i^{PINN} = 0.52946, c_i^{ref} = 0.52716$$

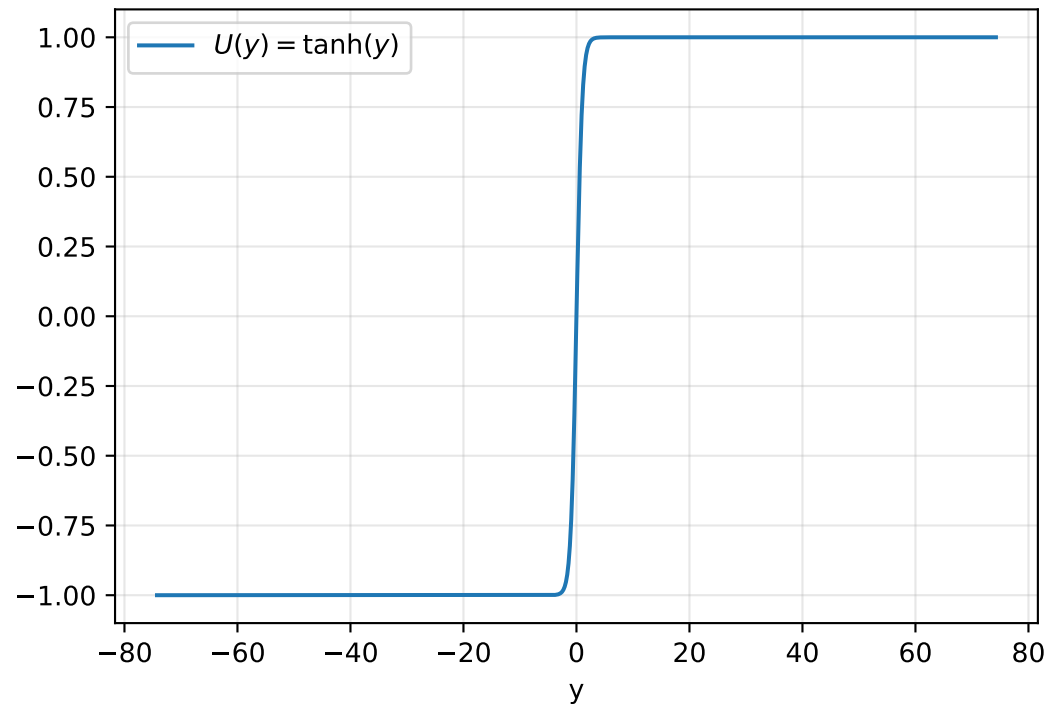


Prototype PINN subsonique | $M=0.300$

Mode PINN pour $\alpha = 0.500$

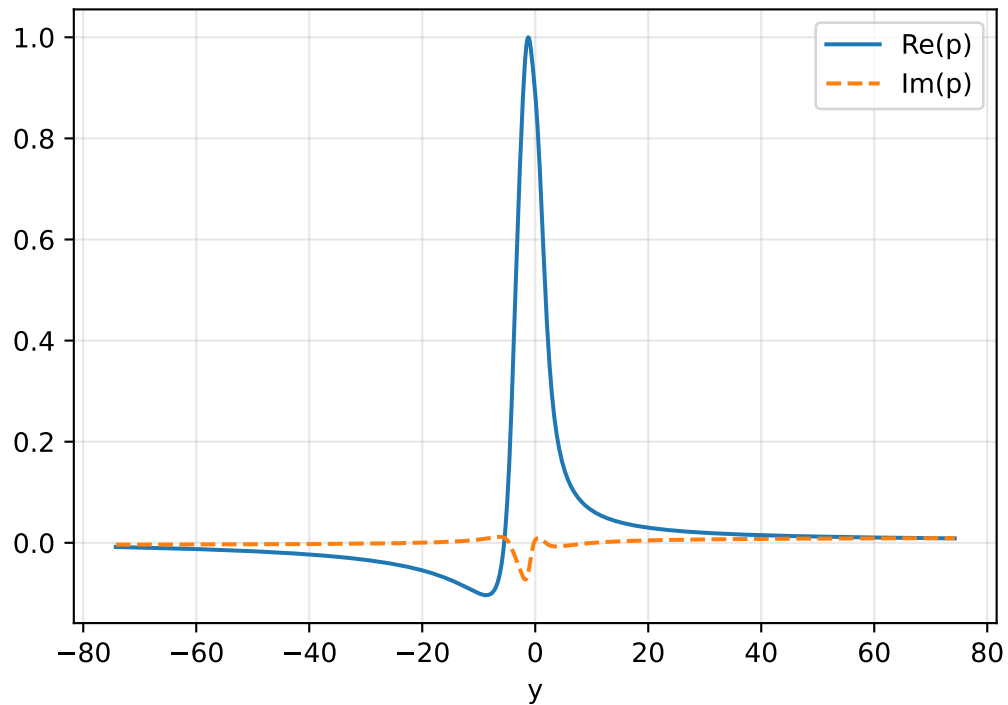


$c_i^{PINN} = 0.33732$, $c_i^{ref} = 0.33571$

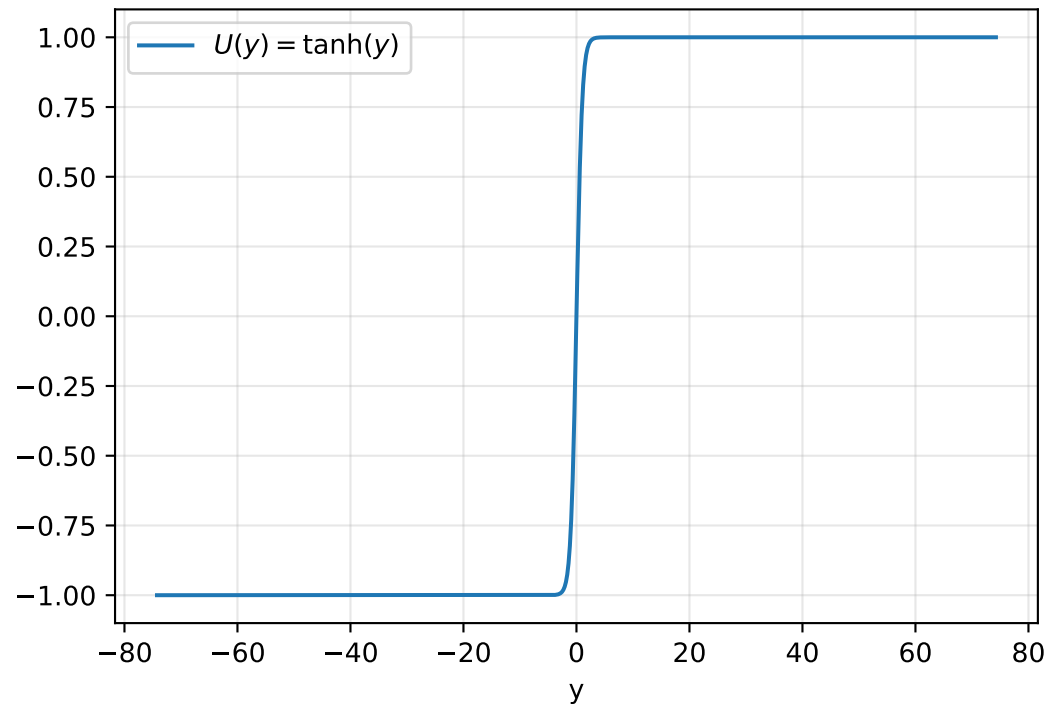


Prototype PINN subsonique | M=0.300

Mode PINN pour $\alpha = 0.700$

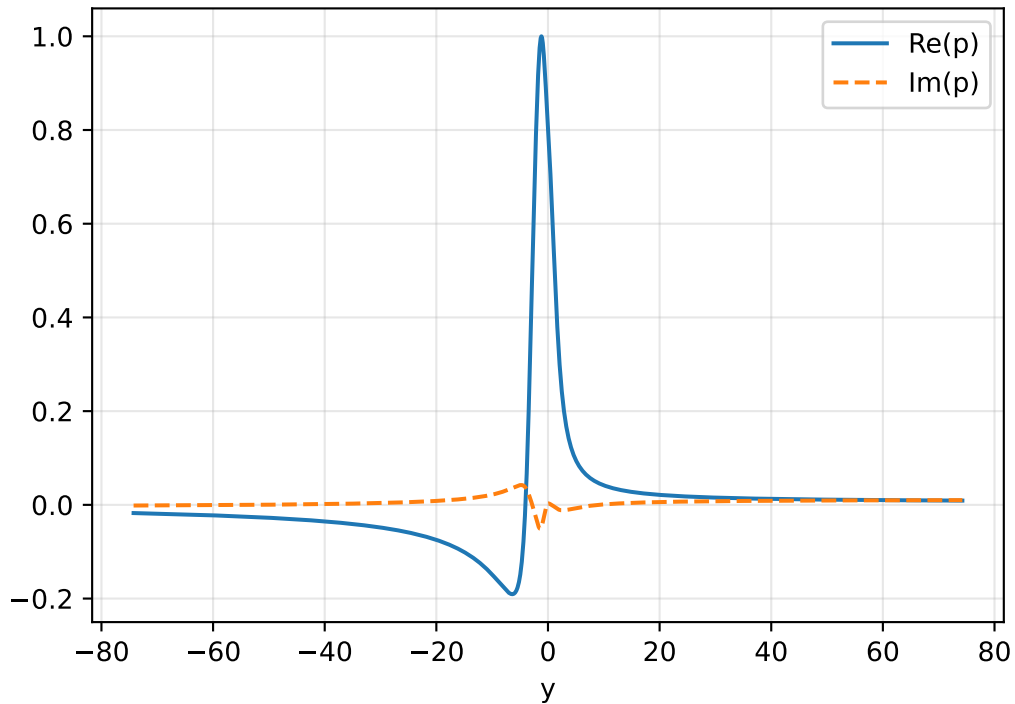


$c_i^{PINN} = 0.17142$, $c_i^{ref} = 0.17528$

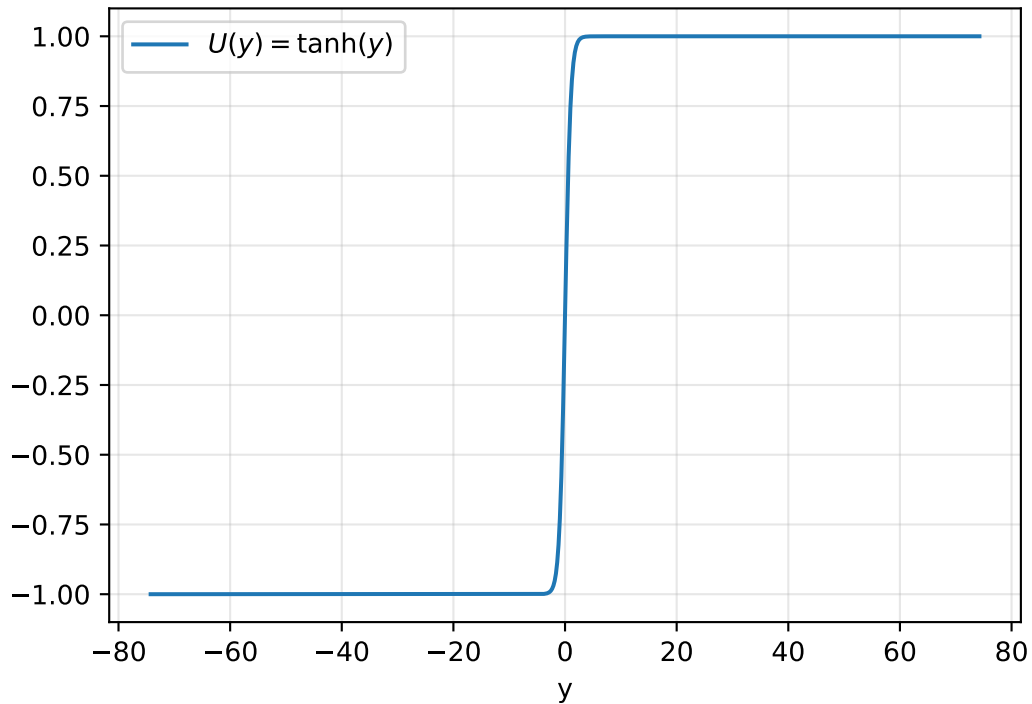


Prototype PINN subsonique | M=0.300

Mode PINN pour $\alpha = 0.800$

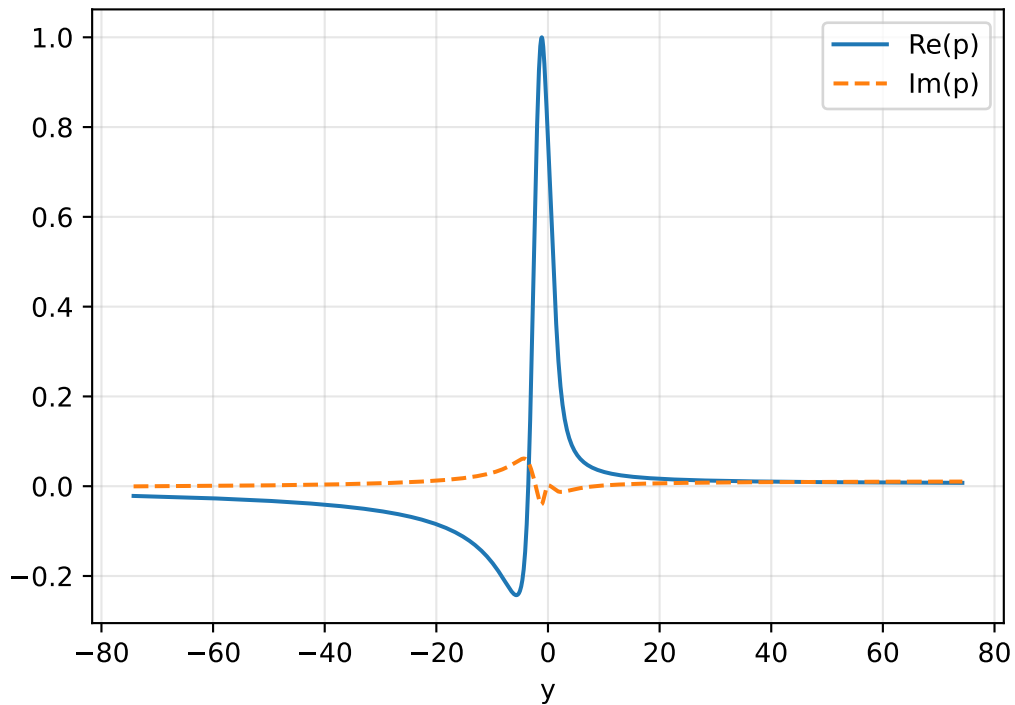


$c_i^{PINN} = 0.10152$, $c_i^{ref} = 0.10315$

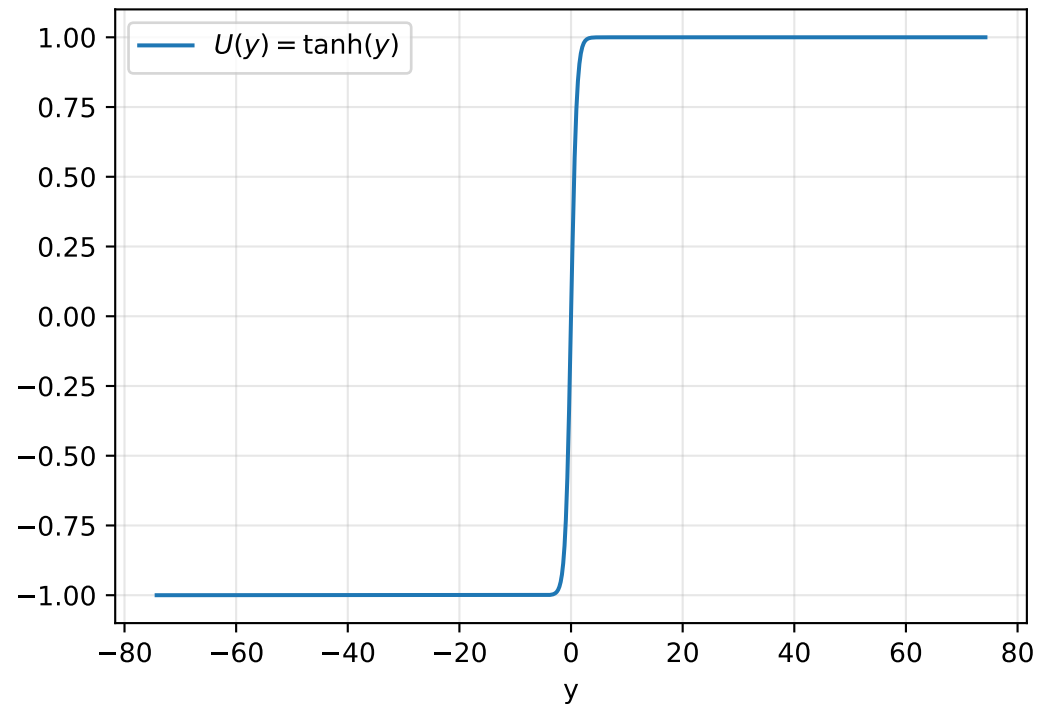

Prototype PINN subsonique | $M=0.300$

Mode PINN pour $\alpha = 0.850$

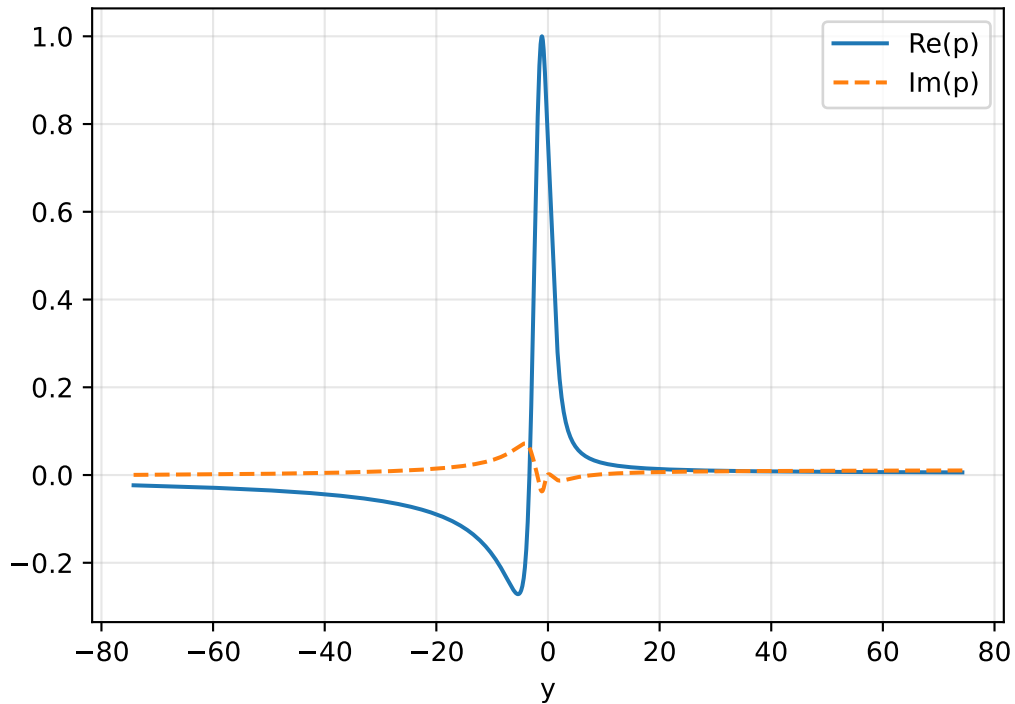

$c_i^{PINN} = 0.07502$, $c_i^{ref} = 0.06870$

