



Prototype PINN subsonique | M=0.500

Mode PINN pour $\alpha = 0.100$

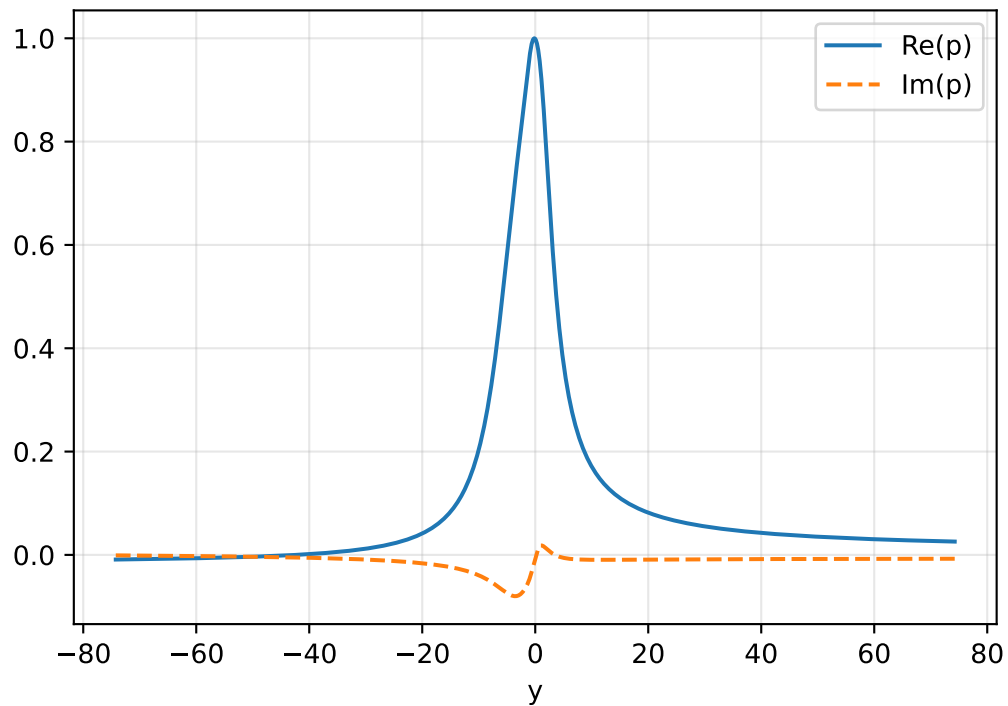


$c_i^{PINN} = 0.67267$, $c_i^{ref} = 0.67045$

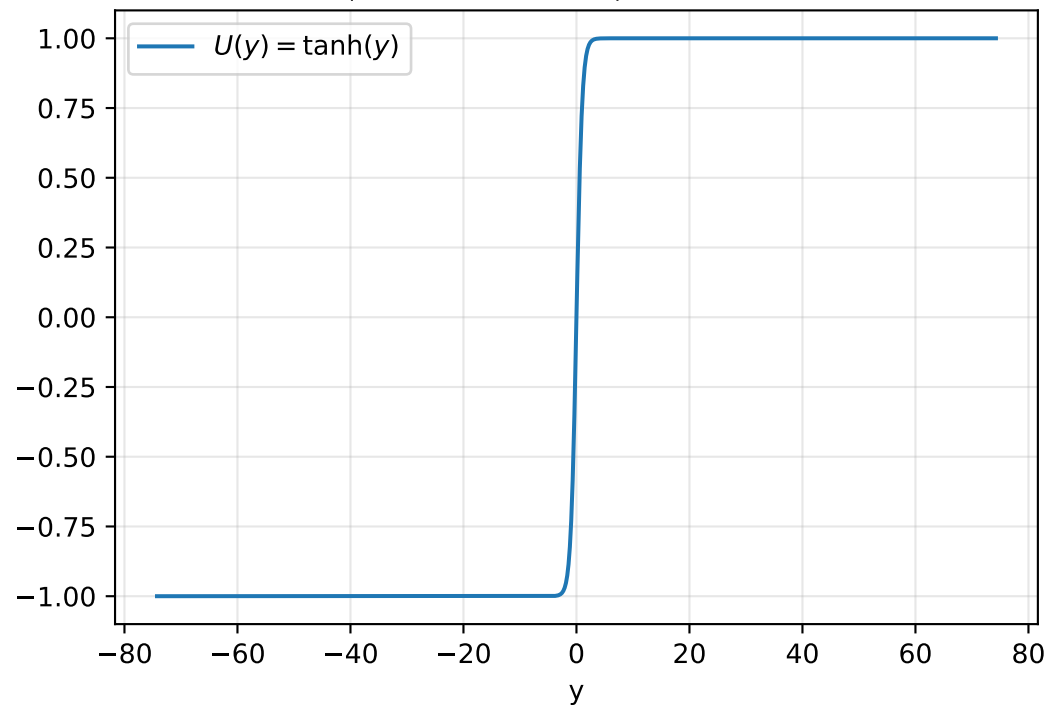


Prototype PINN subsonique | M=0.500

Mode PINN pour $\alpha = 0.300$

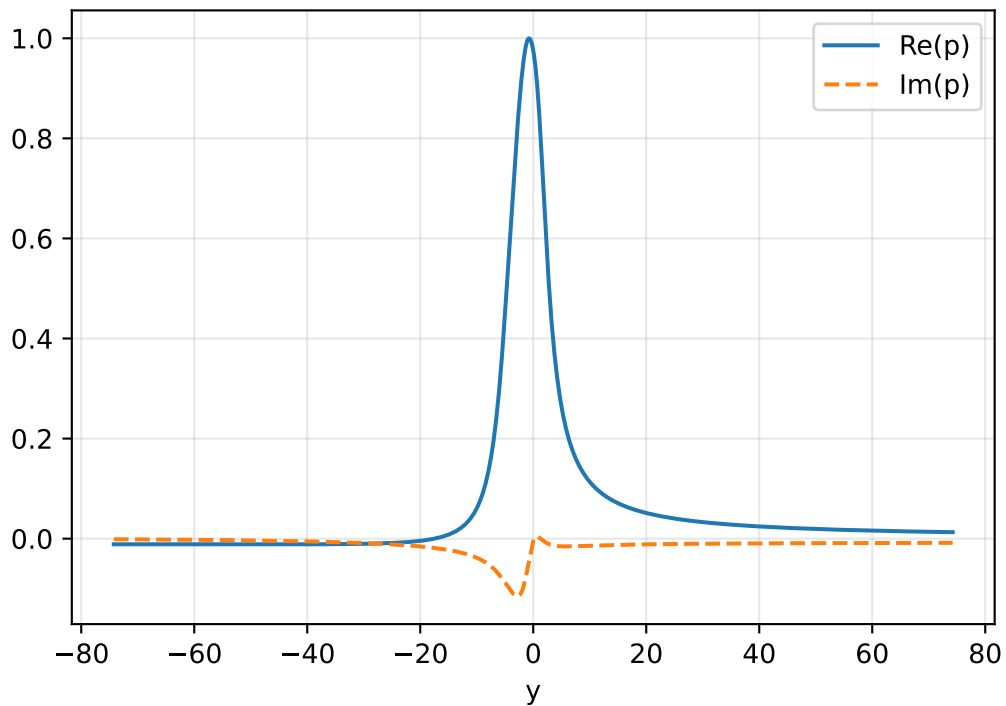


$c_i^{PINN} = 0.44584$, $c_i^{ref} = 0.44668$

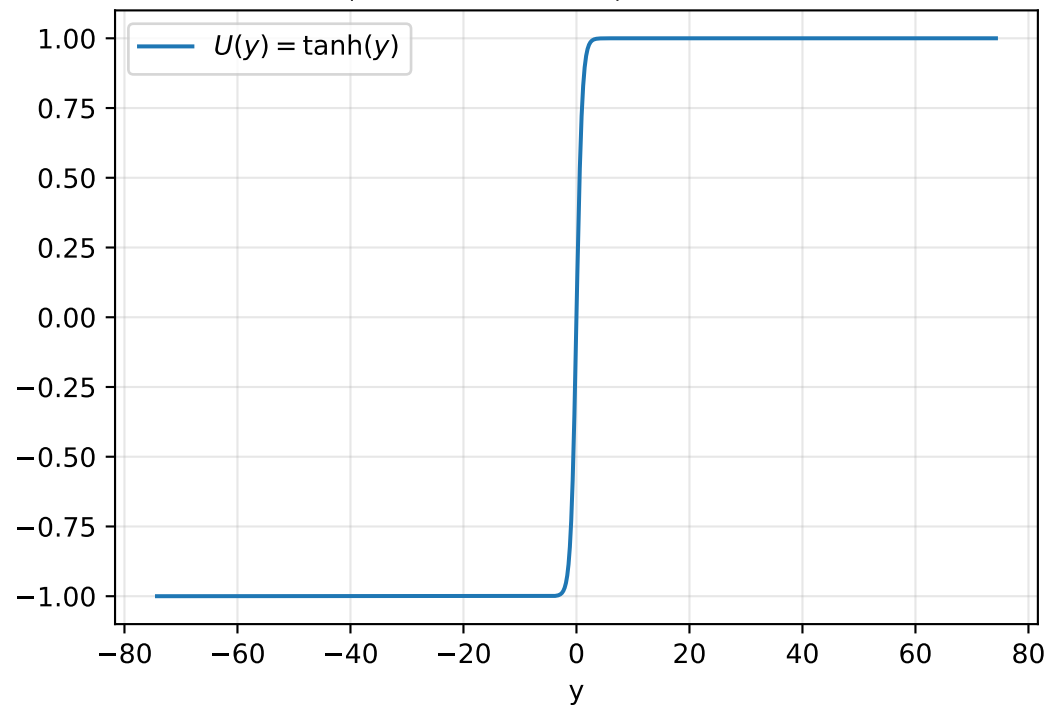


Prototype PINN subsonique | M=0.500

Mode PINN pour $\alpha = 0.500$

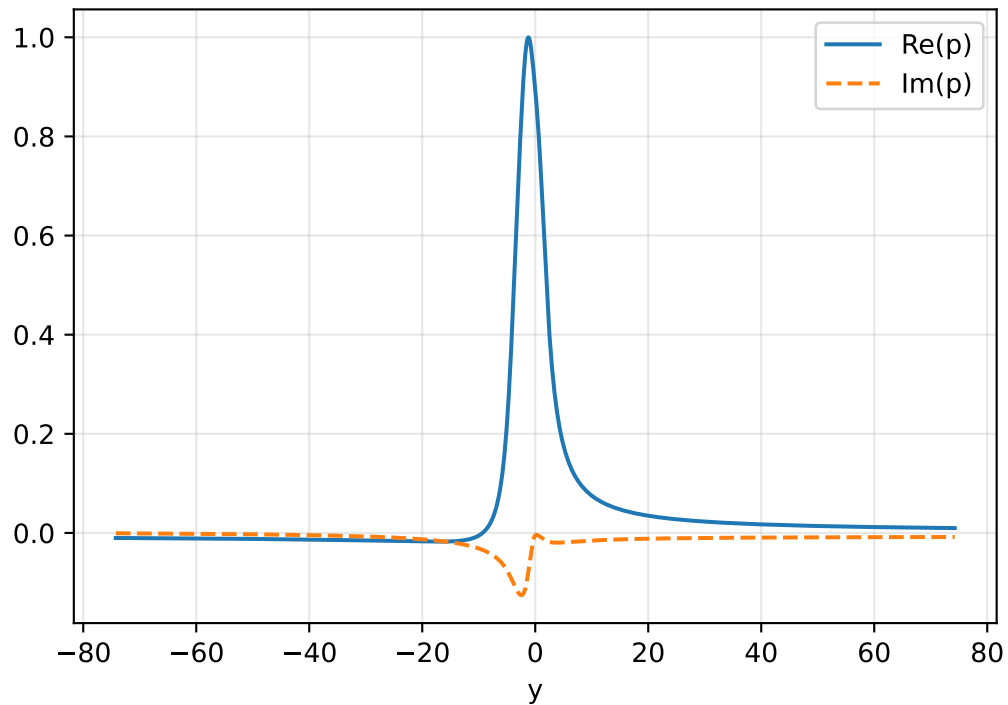


$c_i^{PINN} = 0.26895$, $c_i^{ref} = 0.26733$

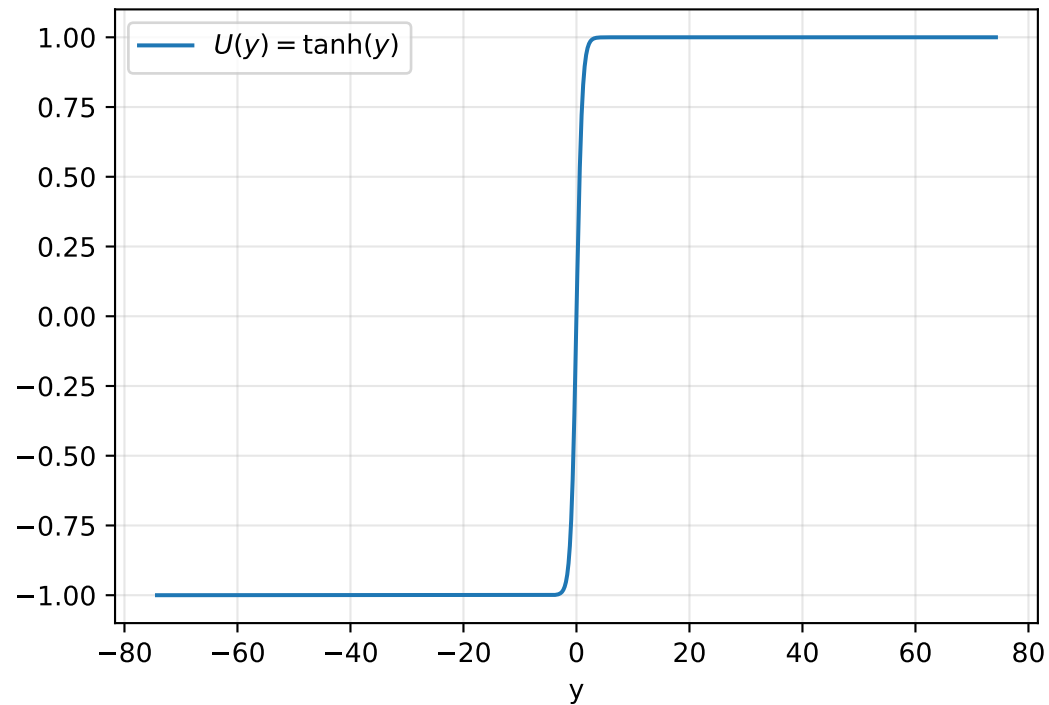

Prototype PINN subsonique | M=0.500

Mode PINN pour $\alpha = 0.700$

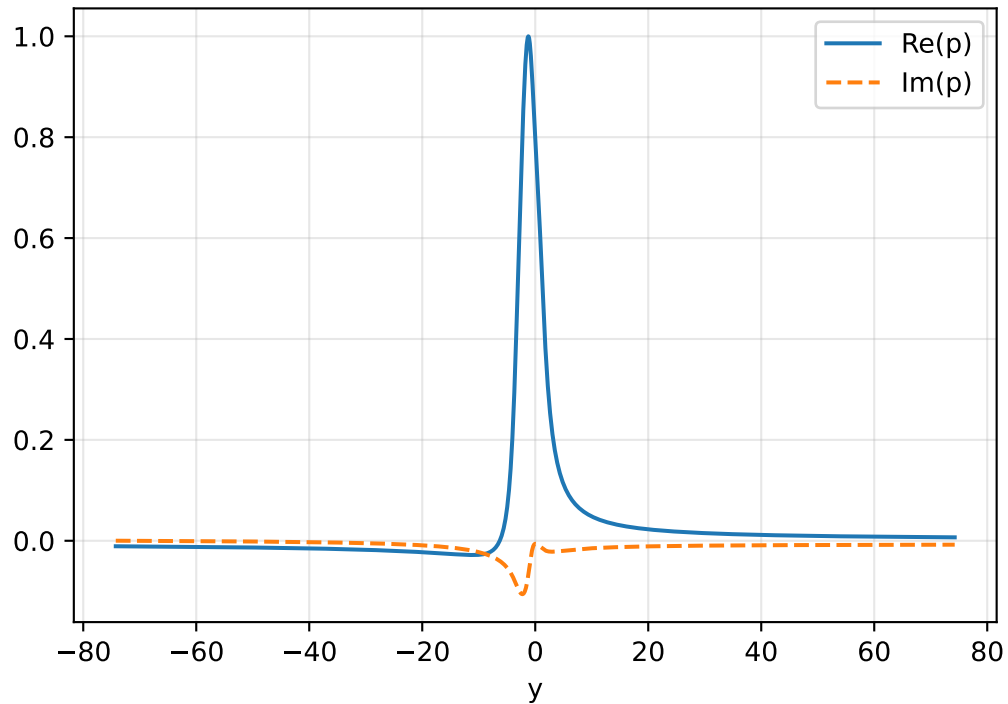

$c_i^{PINN} = 0.10939$, $c_i^{ref} = 0.11418$

