



Prototype PINN subsonique | $M=0.500$

Mode PINN pour $\alpha = 0.100$

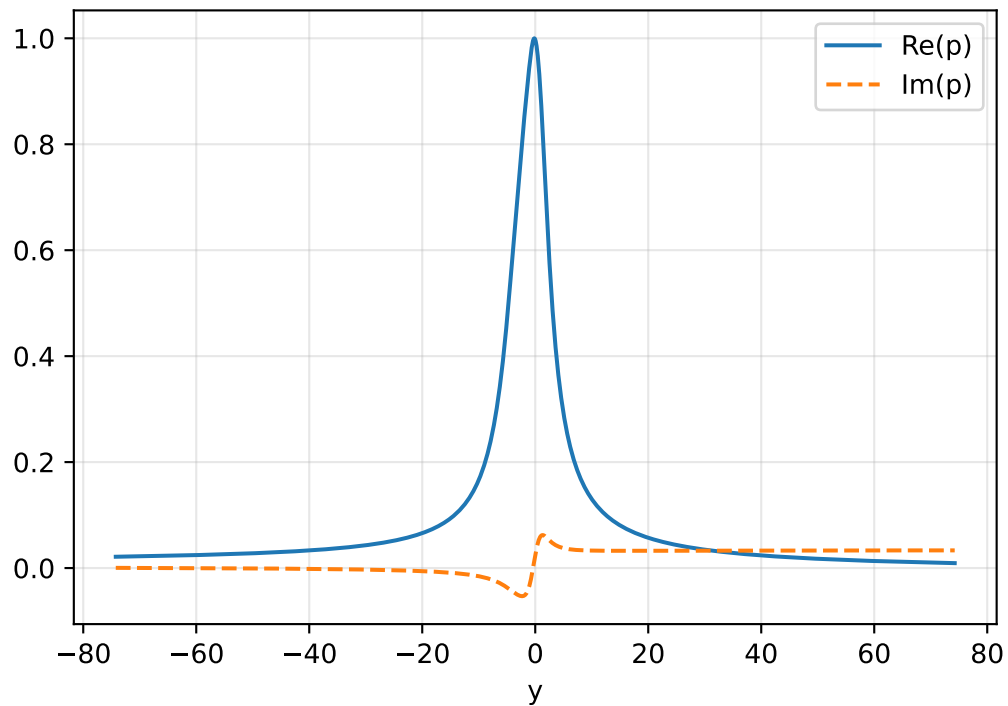


$c_i^{PINN} = 0.66738, c_i^{ref} = 0.67045$

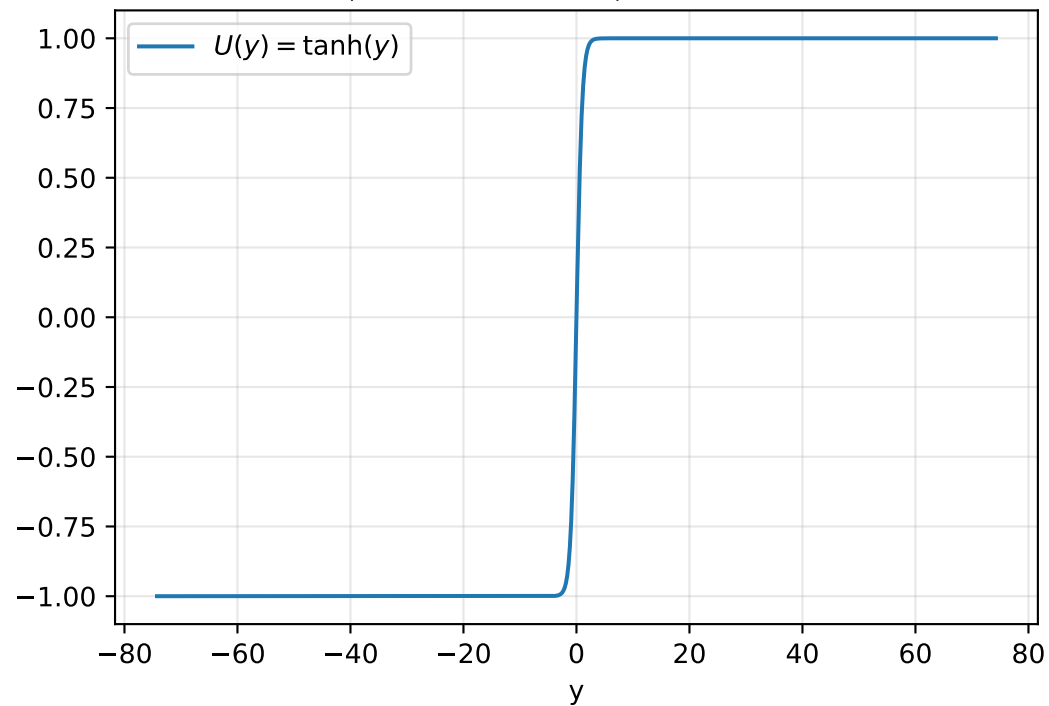


Prototype PINN subsonique | M=0.500

Mode PINN pour $\alpha = 0.300$

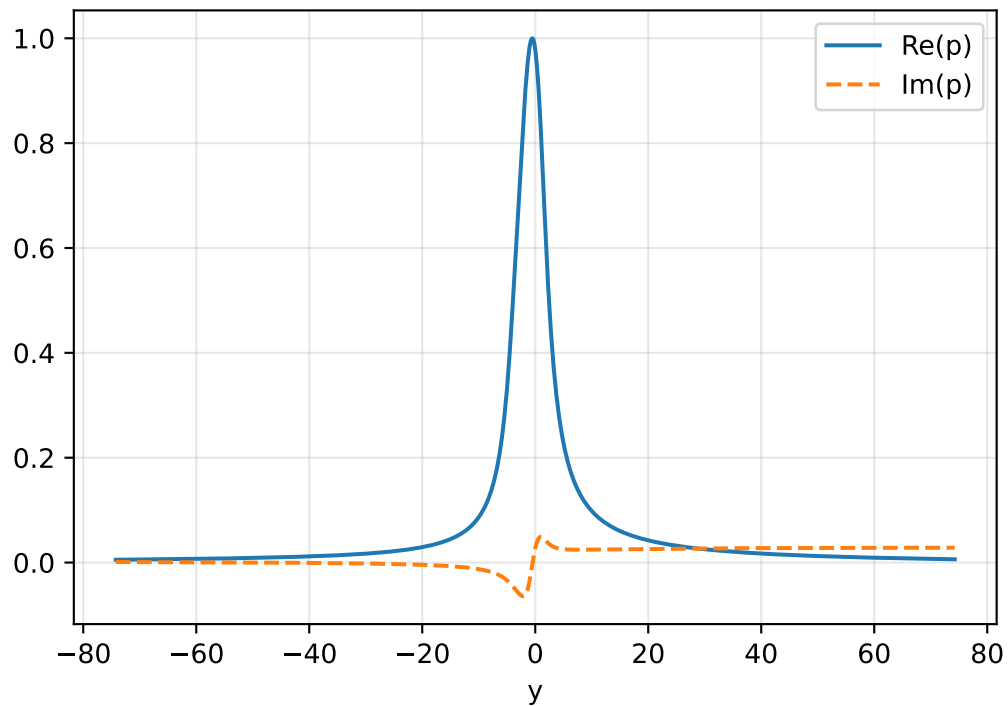


$$c_i^{PINN} = 0.44503, c_i^{ref} = 0.44668$$

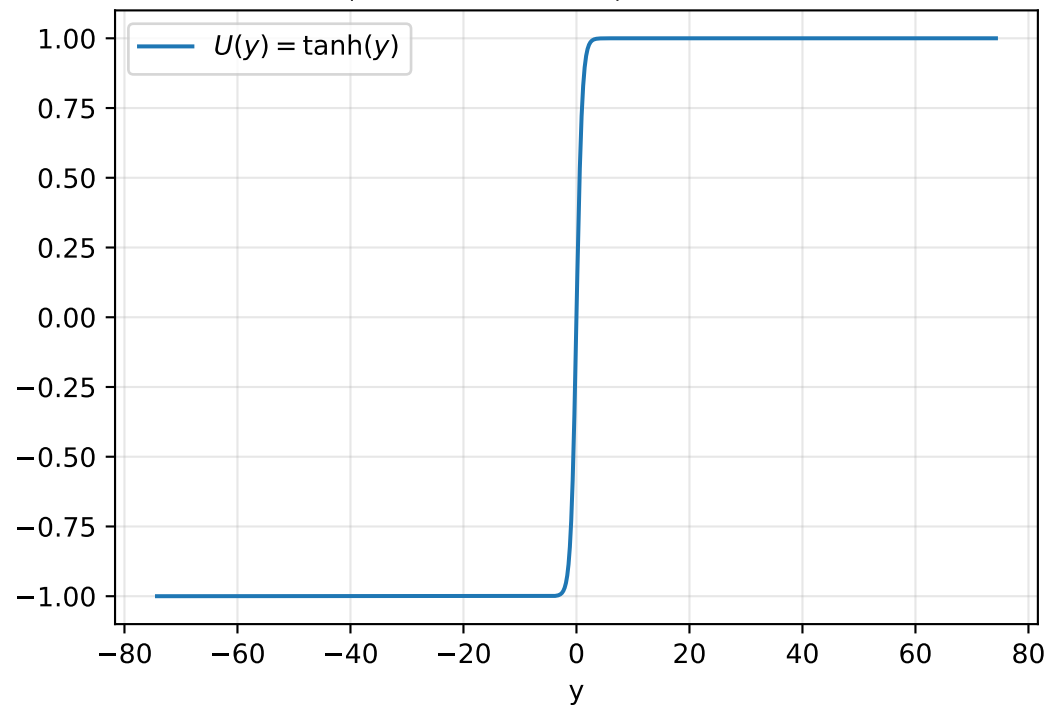


Prototype PINN subsonique | M=0.500

Mode PINN pour $\alpha = 0.500$

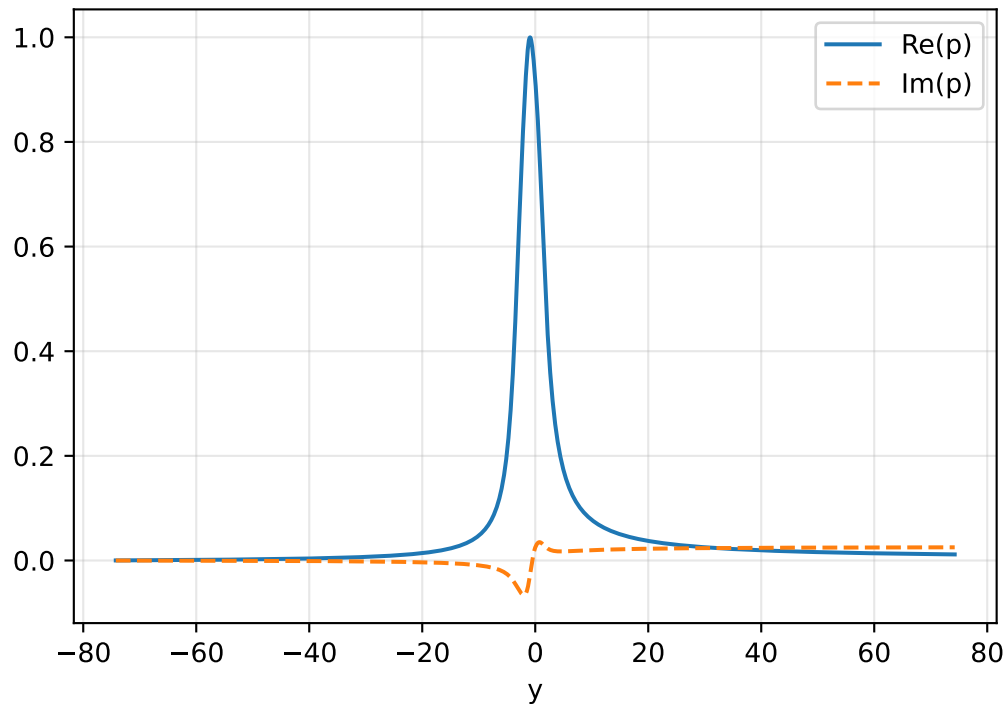


$c_i^{PINN} = 0.26568$, $c_i^{ref} = 0.26733$

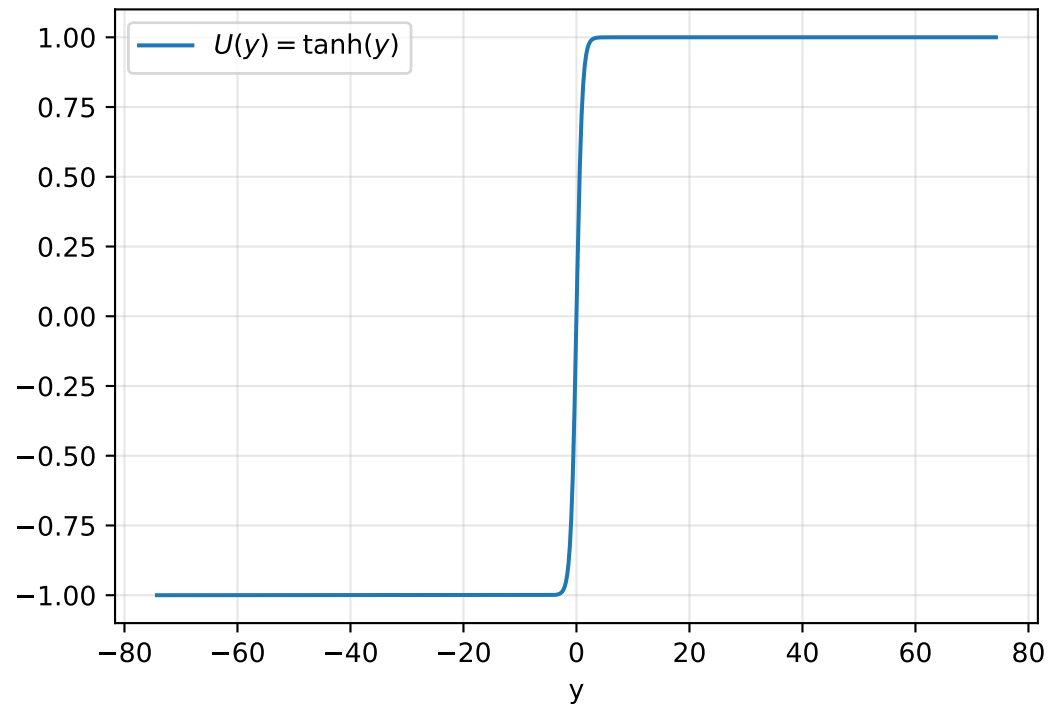


Prototype PINN subsonique | M=0.500

Mode PINN pour $\alpha = 0.700$

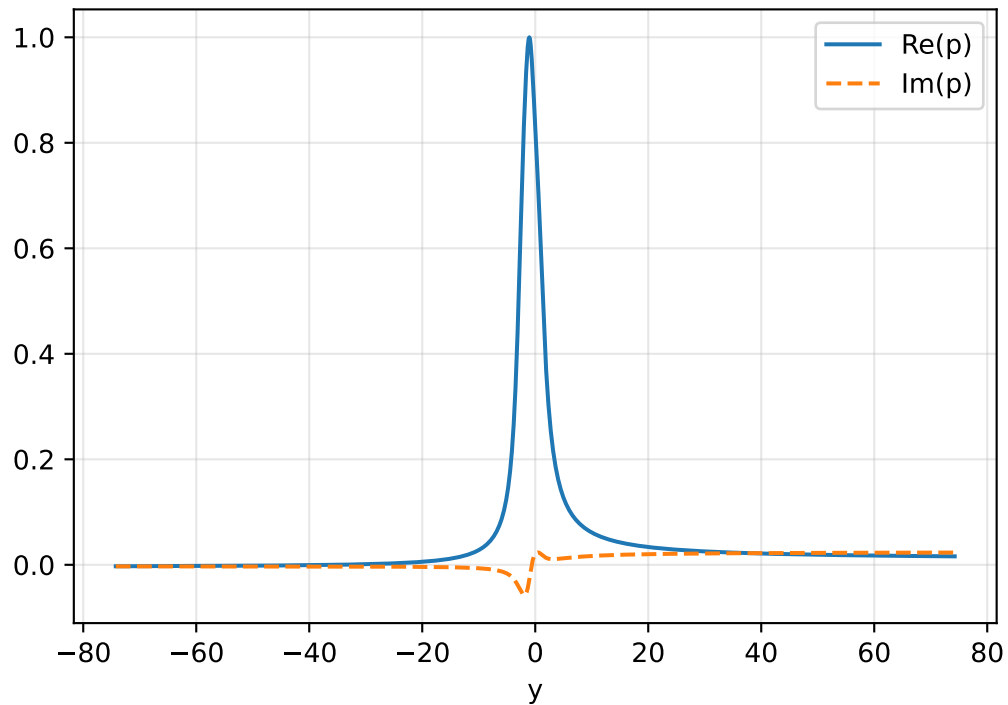


$c_i^{PINN} = 0.11488$, $c_i^{ref} = 0.11418$

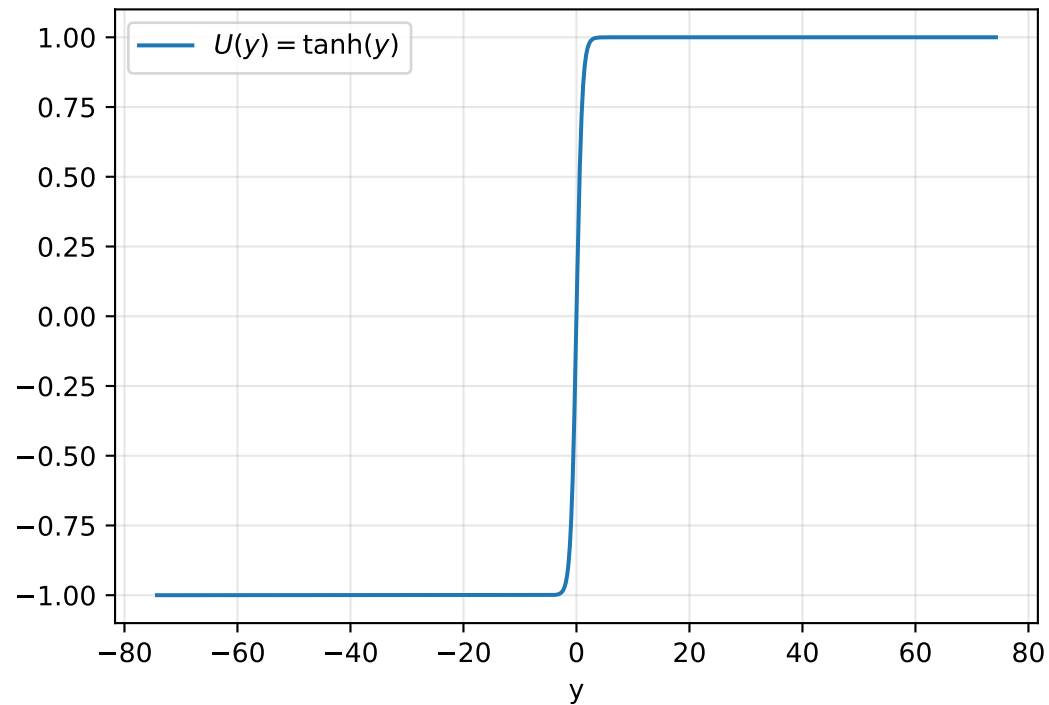

Prototype PINN subsonique | M=0.500

Mode PINN pour $\alpha = 0.800$

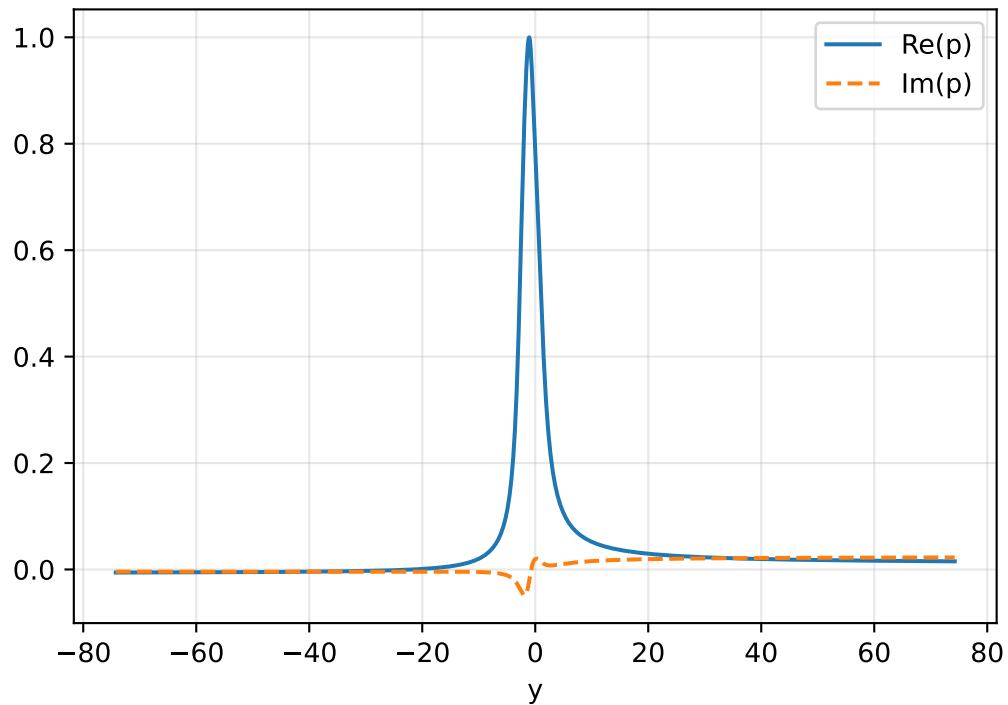

$c_i^{PINN} = 0.04315$, $c_i^{ref} = 0.04427$

