



Prototype PINN subsonique | $M=0.700$

Mode PINN pour $\alpha = 0.050$

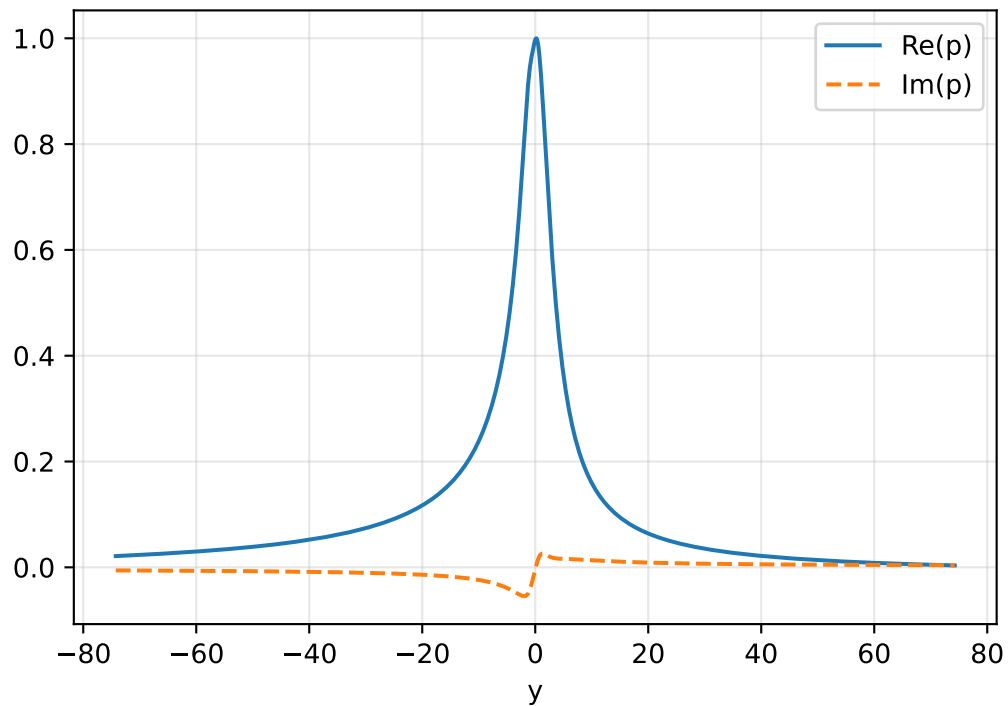


$c_i^{PINN} = 0.60794$, $c_i^{ref} = 0.61408$

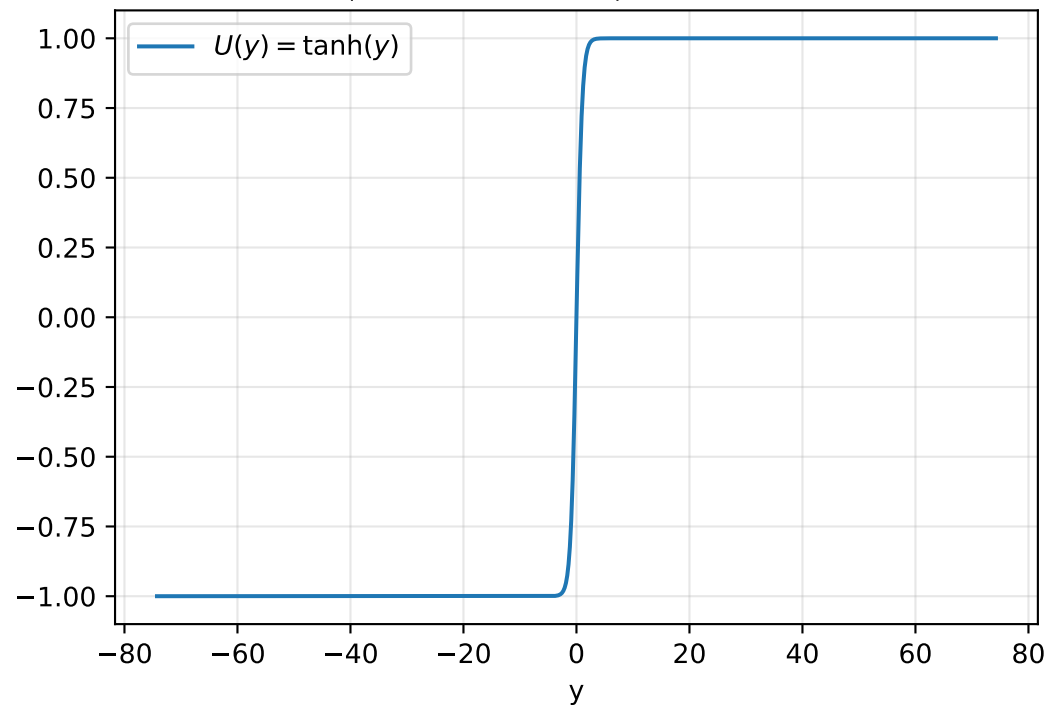


Prototype PINN subsonique | M=0.700

Mode PINN pour $\alpha = 0.100$

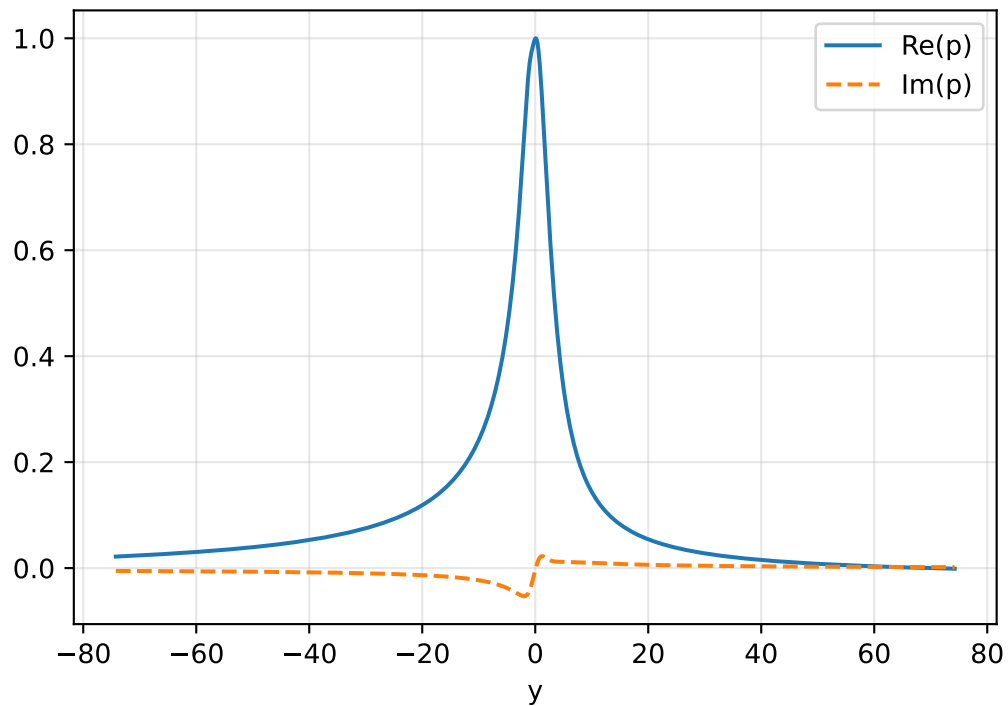


$c_i^{PINN} = 0.54772$, $c_i^{ref} = 0.54897$

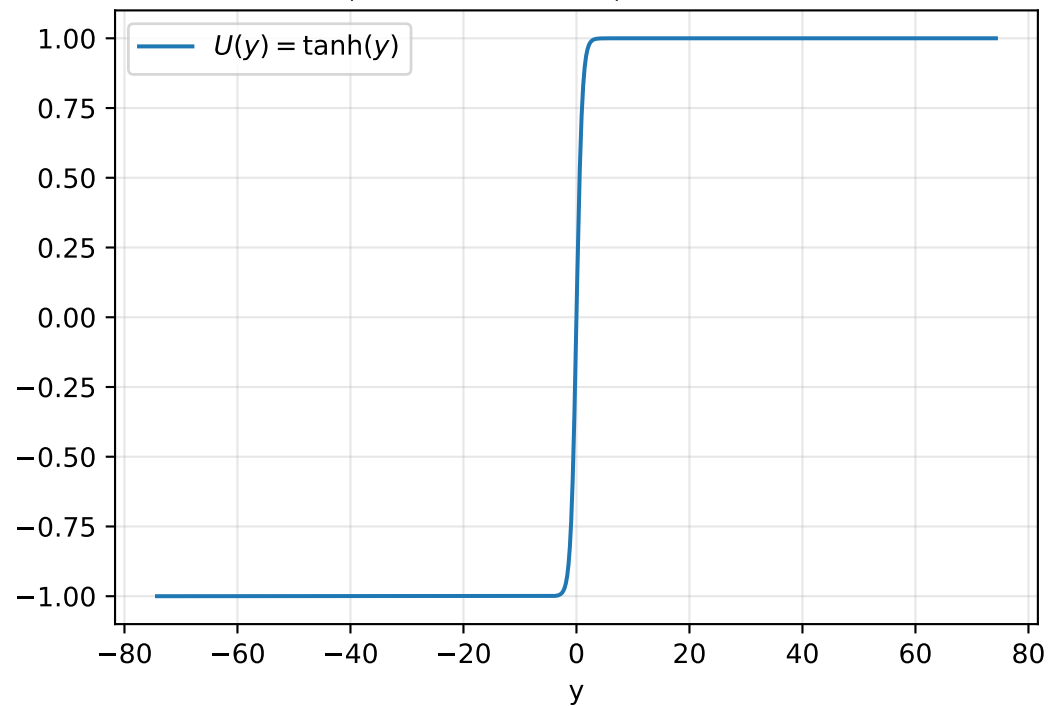


Prototype PINN subsonique | M=0.700

Mode PINN pour $\alpha = 0.300$

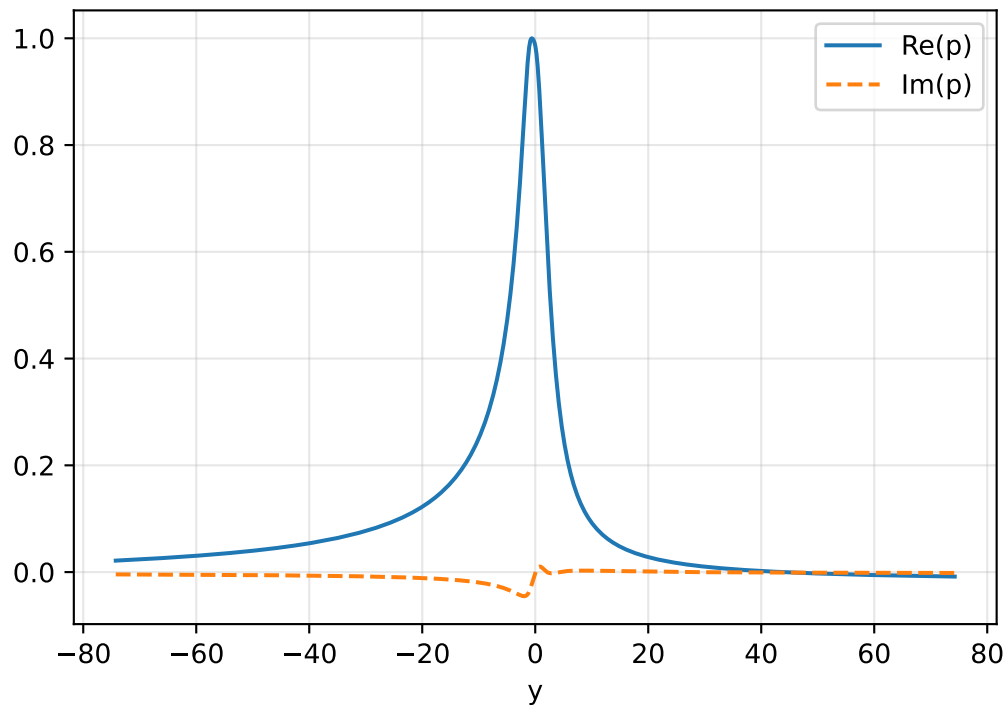


$c_i^{PINN} = 0.33252$, $c_i^{ref} = 0.33292$

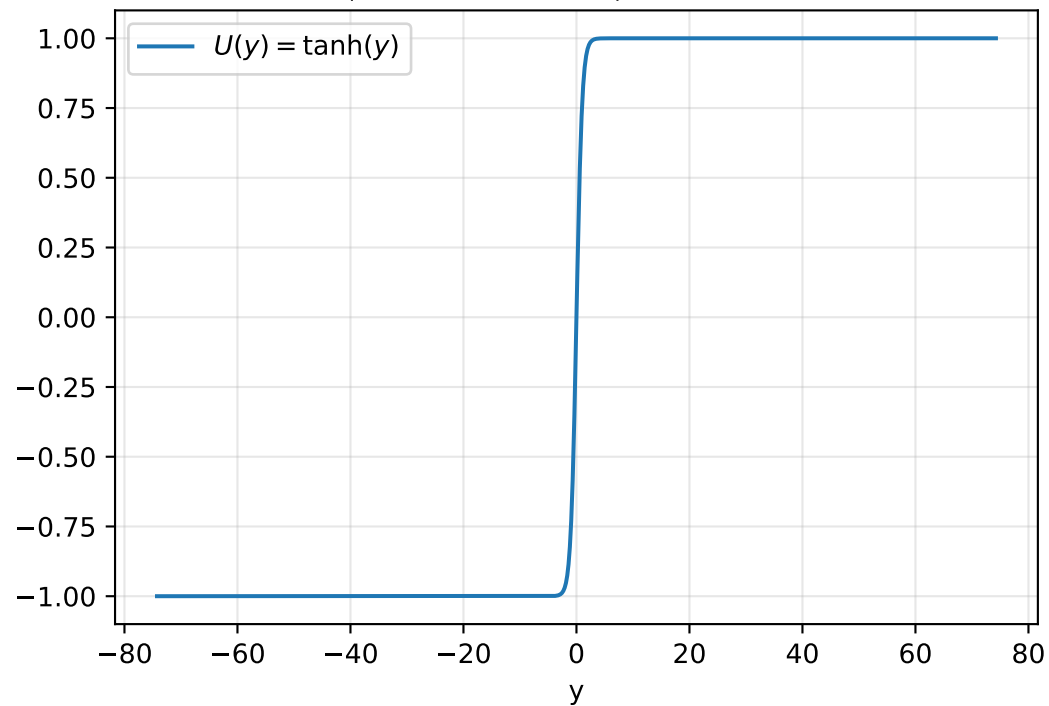


Prototype PINN subsonique | $M=0.700$

Mode PINN pour $\alpha = 0.500$

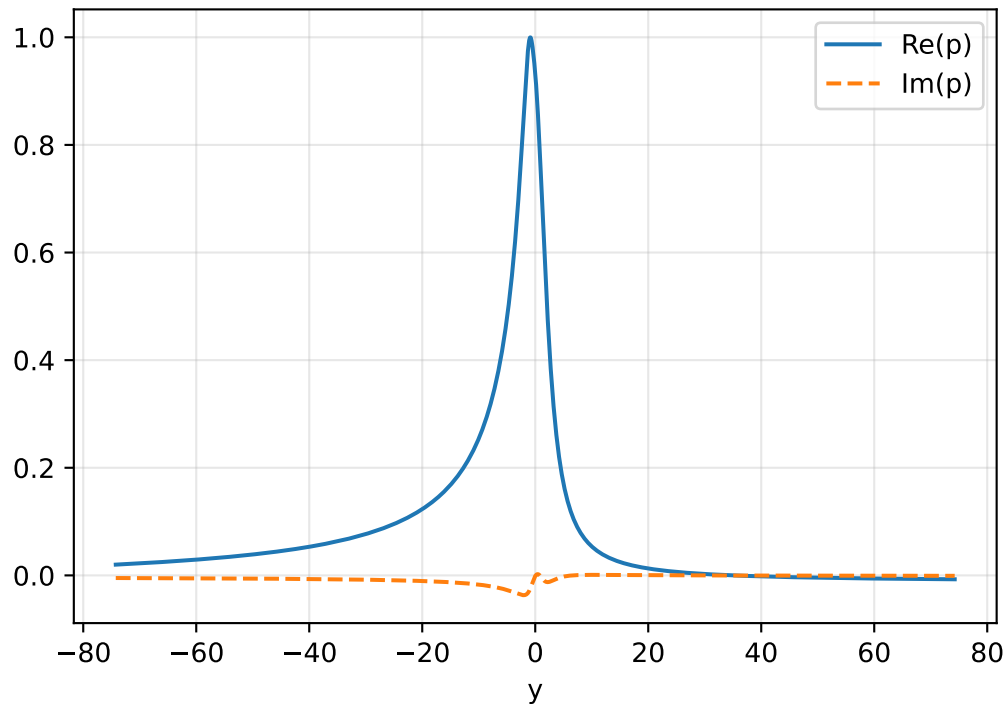


$c_i^{PINN} = 0.15998$, $c_i^{ref} = 0.15968$

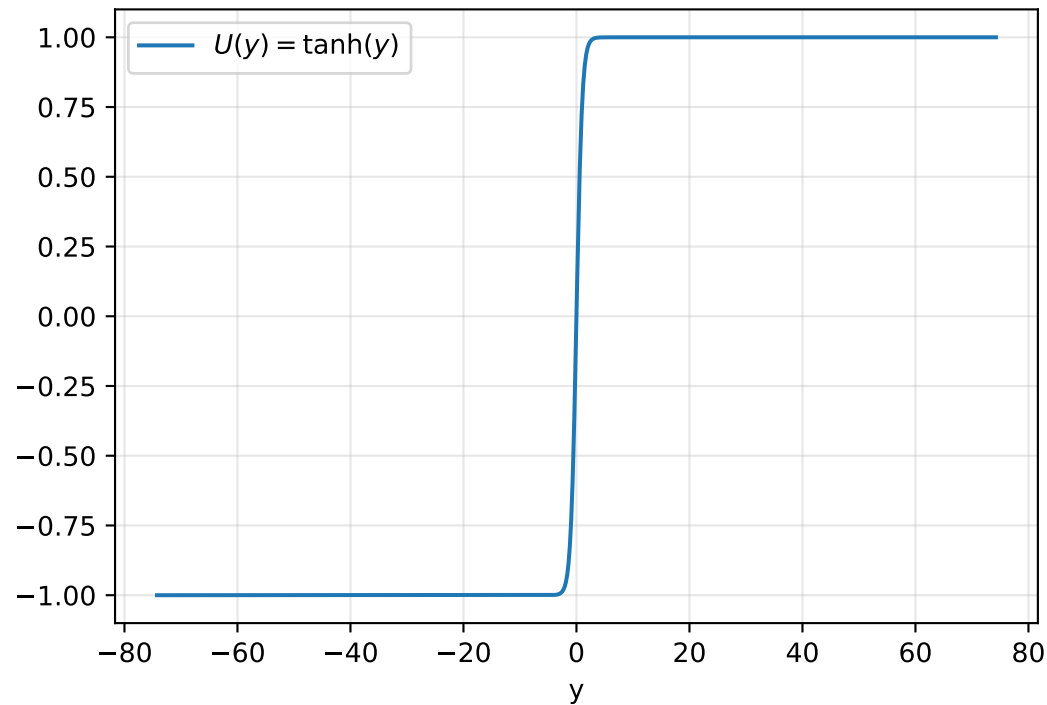


Prototype PINN subsonique | M=0.700

Mode PINN pour $\alpha = 0.700$

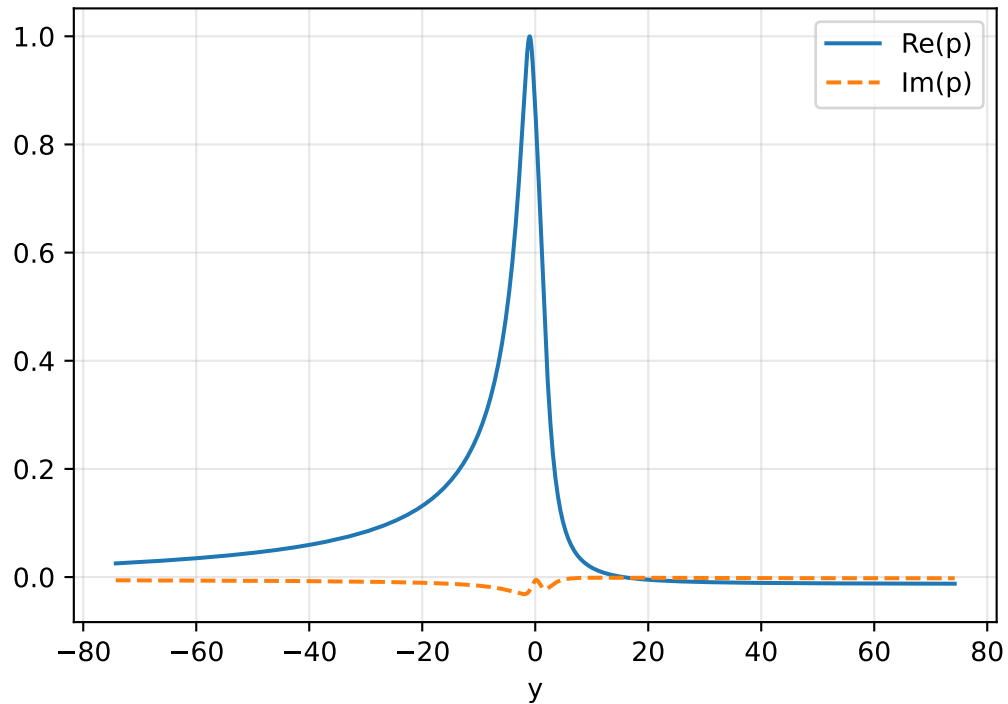


$c_i^{PINN} = 0.02626$, $c_i^{ref} = 0.00999$

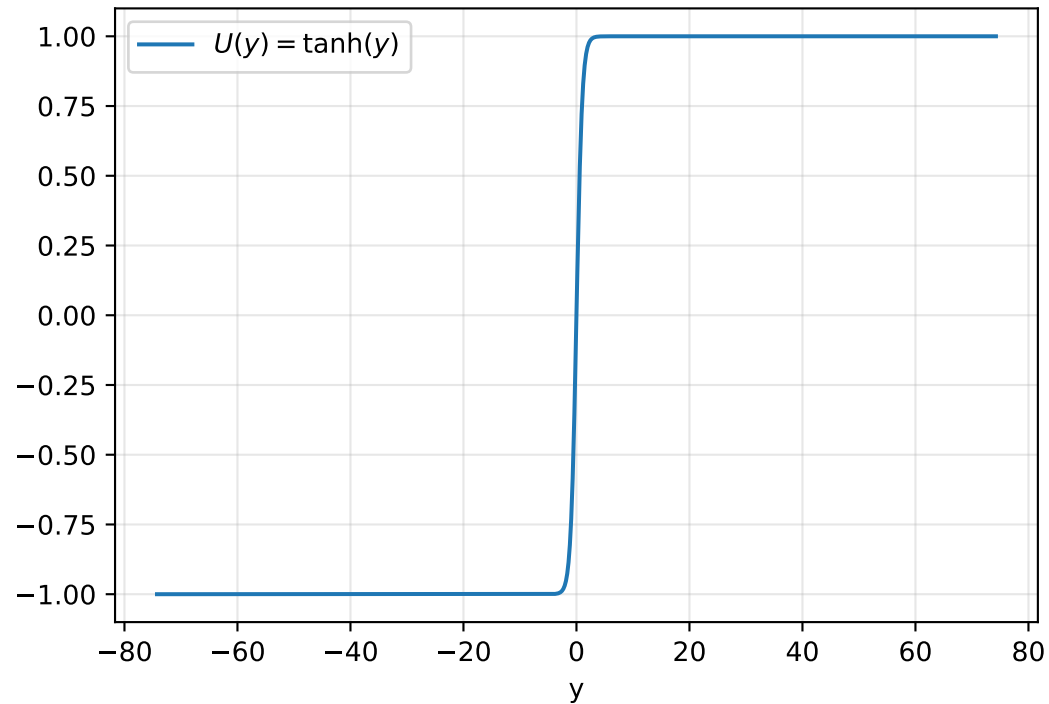


Prototype PINN subsonique | $M=0.700$

Mode PINN pour $\alpha = 0.800$

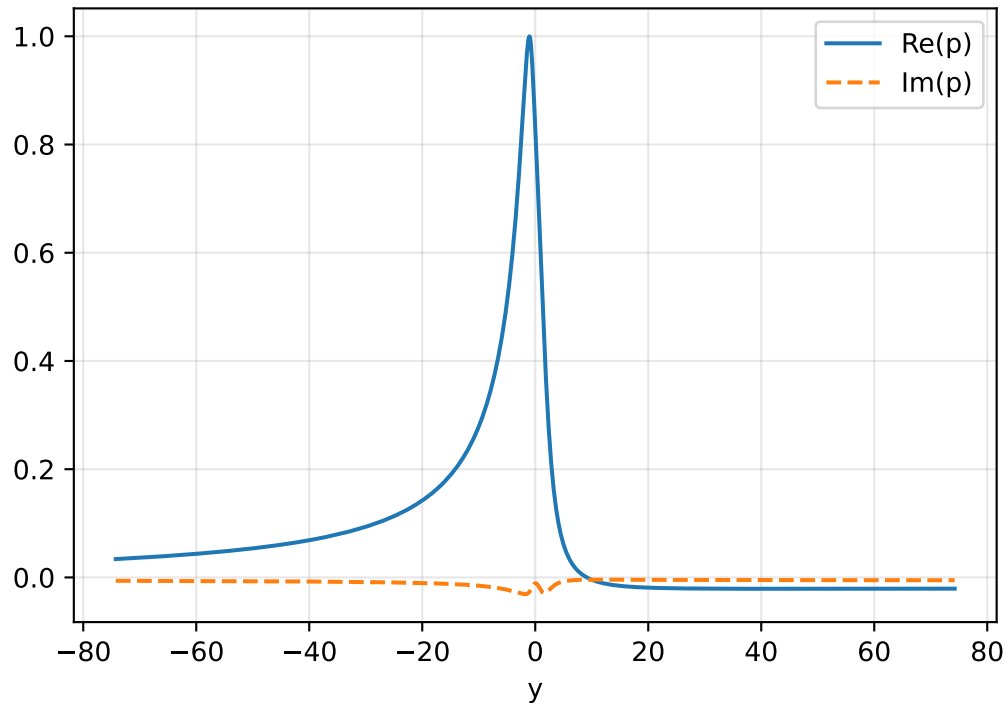


$c_i^{PINN} = 0.01179, c_i^{ref} = 0.00000$

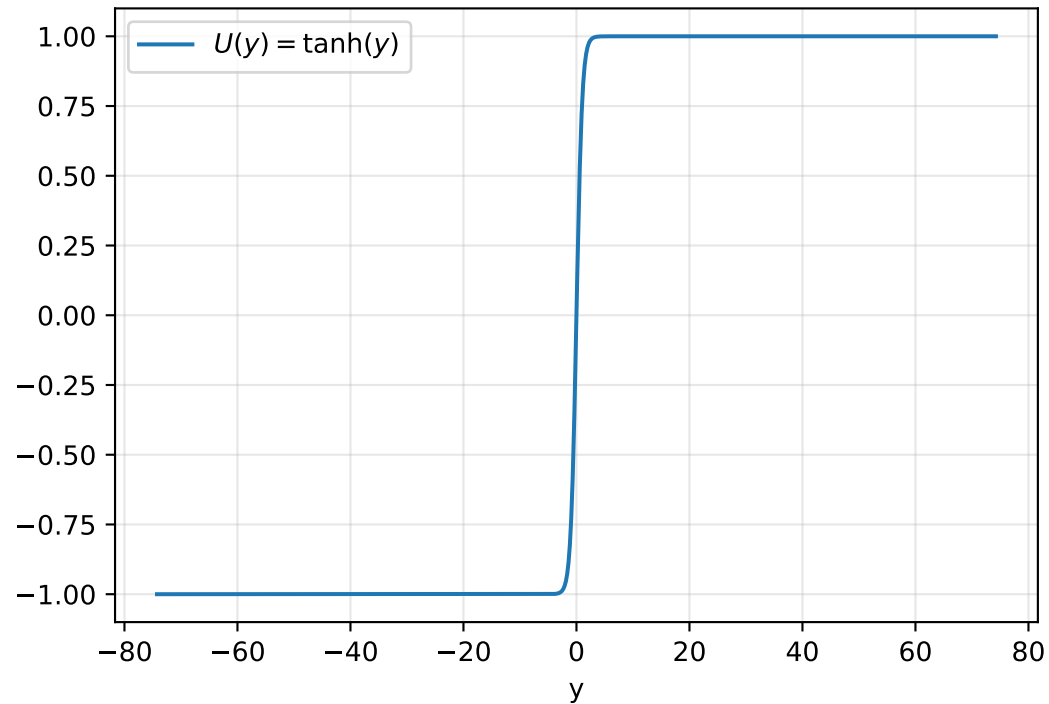

Prototype PINN subsonique | $M=0.700$

Mode PINN pour $\alpha = 0.850$

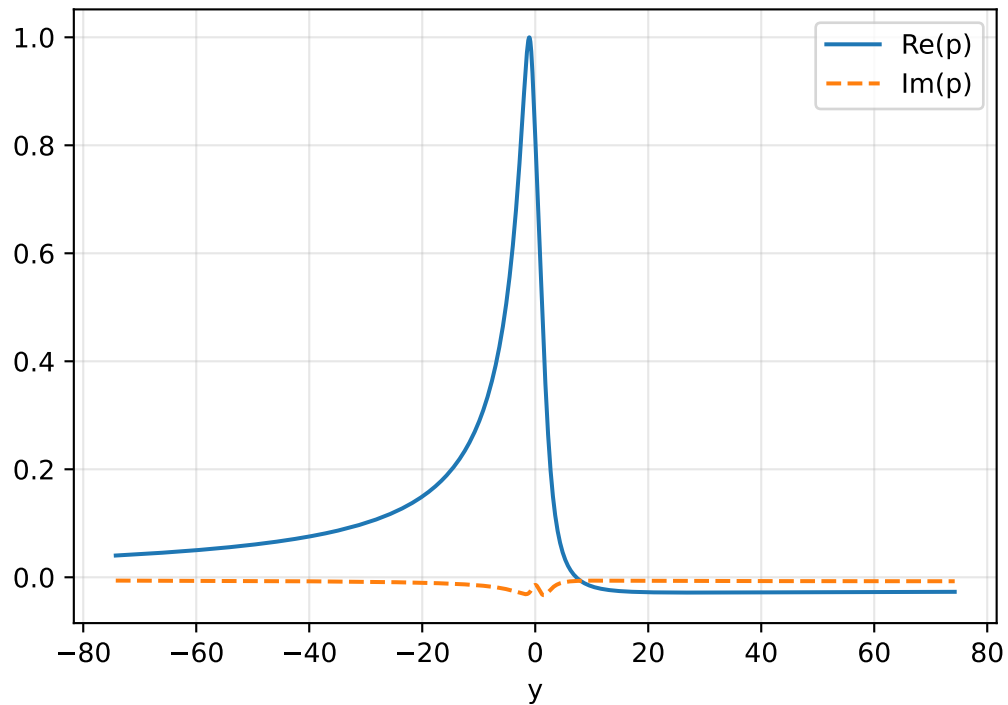

$c_i^{PINN} = 0.00923$, $c_i^{ref} = 0.00000$

