



TOYS REPORT

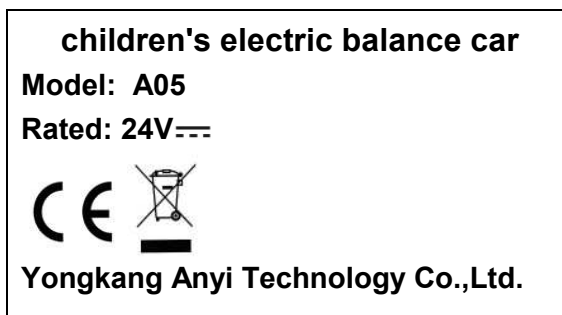
Prepared For :	Yongkang Anyi Technology Co.,Ltd. NO.117 Huangcheng South Road Huangchengli Village Economic Development Zone Yongkang Zhejiang
Product Name:	children's electric balance car
Model :	A05
Other Model:	A06, A01, A02, A03, A04, A115, A109, A1121, A0112, A0213, A046, A056, A057, A067, AK9, AX-11
Prepared By :	Shenzhen EZT Testing Technology Co., Ltd 3F, Building B, Weicheng Industrial Park, No.16 Nanhuan Road, Matian Street, Guangming District, Shenzhen City, Guangdong Province, China.
Test Date:	Mar.03,2023-Mar.09,2023
Date of Report :	Mar.09,2023
Report No.:	EZT20230310602SR



Test Report	
EN62115 Electric toys-Safety	
Testing Firm	: Shenzhen EZT Testing Technology Co.,Ltd.
Address	: 3F, Building B, Weicheng Industrial Park, No.16 Nanhuan Road, Matian Street, Guangming District, Shenzhen City, Guangdong Province, China.
Applicant	: Yongkang Anyi Technology Co.,Ltd.
Address	: NO.117 Huangcheng South Road Huangchengli Village Economic Development Zone Yongkang Zhejiang
Manufacturer	: Yongkang Anyi Technology Co.,Ltd.
Address	: NO.117 Huangcheng South Road Huangchengli Village Economic Development Zone Yongkang Zhejiang
Standard	: EN 62115:2005+A12:2015
Test Result	: Compliance with EN 62115:2005+A12:2015
Procedure deviation	: children's electric balance car
Non-standard test method	: N.A.
Type of test object	: N/A
Trademark	: ANYI
Model/type reference	: A05
Rating	: 24V==
Test item particulars :	
Operation condition	: Continuous operation
Class of equipment	: Class III
Mass of equipment (Kg)	: N/A
Protection against ingress of water .	: --
Possible test case verdicts :	
test case does not apply to the test object	: N(.A.)
test object does meet the requirement	: P(ass)
test object does not meet the requirement	: F(ail)



General remarks:	
"(see remark #)" refers to a remark appended to the report.	Attached with: Photo-documentation
"(see appended table)" refers to a table appended to the report.	
Throughout this report a comma is used as the decimal separator.	
The test results presented in this report relate only to the object tested.	
This report shall not be reproduced except in full without the written approval of the testing laboratory.	

Artwork of Marking Label



Name and address of the testing laboratory: Shenzhen Ezt Testing Technology Co., Ltd
3F, Building B, Weicheng Industrial Park, No.16
Nanhuan Road, Matian Street, Guangming District,
Shenzhen City, Guangdong Province, China.

Test by (name+ Signature) : Beryl zhao

Beryl zhao

Approved by (name+ Signature) : Steven



Date of issue..... : Mar.09,2023

EN 62115			
Clause	Requirement – Test	Result - Remark	Verdict
7	Marking and instructions		P
7.1	Toys or their packaging shall be marked with – the name, trade mark or identification mark of the manufacturer or responsible vendor; – the model or type reference.	See marking label	P
7.1.1	Battery toys with replaceable batteries shall be marked with – the nominal battery voltage, in or on the battery compartment; – the symbol for d.c., if the toy has a battery box.		P
7.1.2	7.1.2 Transformer toys shall be marked with – their rated voltage, in volts; – the symbol for a.c. or d.c., as applicable; – their rated power input, in watts or volt-amperes, if greater than 25 W or 25 VA; – the symbol for transformer for toys. This symbol shall also be marked on the packaging.		N/A
7.1.3	Dual-supply toys shall be marked with the marking required for both battery toys and transformer toys.		N/A
7.2	The identification for detachable lamps shall be marked with – the rated voltage and type number, or – the maximum power input, or – the maximum current.	No this device	N/A
7.4	Instructions shall be provided that give details concerning cleaning and maintenance when necessary for the safe operation of the toy. They shall state that transformers or battery chargers used with the toy are to be regularly examined for damage to the cord, plug, enclosure and other parts, and in the event of such damage, they must not be used until the damage has been repaired.		P
7.5	When markings or instructions are on the packaging, it shall also be stated that the packaging must be retained since it contains important information.		P
7.7	Instructions and other texts required by this standard shall be written in the official language of the country in which the toy is to be sold.		P
7.8	The markings on the toy shall be legible and durable.		P
8	Power input		N/A
	The power input of transformer toys shall not exceed the rated power input by more than 20 %.		N/A

9	Heating and abnormal operation		P
9.1	Toys shall not attain excessive temperatures in use. They shall be constructed so that the risk of fire, mechanical damage impairing safety or other hazards, as a result of careless use or failure of a component, is obviated as far as is practicable.		P
9.2	Toys are placed in the most unfavourable position that can occur during play.		P
9.3	Toys are operated under normal operation and the temperature rises of the various parts are determined.		P
9.4	The test of 9.3 is repeated, the insulation between parts of different polarity being shortcircuited in turn if it is accessible after the removal of detachable parts, except lamps. However, the short circuit is only applied if it is possible to bridge the insulation by a straight steel pin having a diameter of 0,5 mm and any suitable length over 25 mm, or by a rod having a diameter of 1,0 mm inserted through holes in the enclosure up to a depth of 100 mm. The pin is applied only with sufficient force to hold it in position and only inserted through holes where one pole can be seen from the outside		P
9.5	The test of 9.3 is repeated, any control that limits the temperature during the tests of 9.3 and 9.4 being short-circuited. If the toy has more than one control, they are short-circuited in turn.		N/A
9.8	Compliance for electronic circuits is checked by evaluation of the fault conditions specified in 9.8.2 for all circuits or parts of circuits, unless they comply with the conditions specified in 9.8.1.		P
9.9	After the tests, the toy shall not be damaged to such an extent that compliance with this standard is impaired.	Enclosure:7K	P

10	Electric strength at operating temperature		P
	The electrical insulation of the toy at operating temperature shall be adequate.		P

11	Moisture resistance		P
11.1	Battery toys intended to be used in water and toys likely to be cleaned with liquid shall have an enclosure providing the appropriate protection.	NO THIS FUNCTION	N/A
11.2	Toys shall be resistant to humidity.	48 h relative humidity of 95 %	P

12	Electric strength at room temperature		P
	The electric insulation of the toy at room temperature shall be adequate.		P

13	Mechanical strength		P
13.1	Enclosures shall have adequate mechanical strength.		P
14	Construction		P
14.1	The working voltage between any two parts of the toy shall not exceed 24 V when the toy is supplied at rated voltage.	Battery supply	P
14.8	Rechargeable batteries shall not leak when the toy is placed in any position. The electrolyte shall not become accessible even if a tool has to be used to remove covers or similar parts.		P
14.9	Toys shall not be supplied by batteries connected in parallel unless a mixture of used and new batteries, or the reverse insertion of batteries, does not impair compliance with this standard.		P
14.10	Plugs and socket-outlets of toys shall not be interchangeable with plugs and socketoutlets listed in IEC 60083 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1.		N/A
14.12	It shall not be possible to charge rechargeable batteries when they are in the toy		N/A
14.13	Toys shall not incorporate series motors having a power input exceeding 20 W		N/A
14.14	Toys shall not contain asbestos.		N/A
15	Protection of cords and wires		P
15.1	Wireways shall be smooth and free from sharp edges.		P
15.2	Bare wiring and heating elements shall be rigid and fixed so that during normal use clearances and creepage distances cannot be reduced below the values specified in Clause 18.	NO THIS DEVICE	N/A
16	Components		P
16.1	Components shall comply with the safety requirements specified in the relevant IEC standards as far as they reasonably apply.		P
16.2	Toys shall not be fitted with – thermal cut-outs that can be reset by a soldering operation; – mercury switches.	NO THIS DEVICE	P
16.3	Transformers for toys shall comply with IEC 61558-2-7.		N/A
17	Screws and connections		P

17.1	Screws used for these purposes shall not be of metal that is soft or liable to creep, such as zinc or aluminium. If they are of insulating material they shall have a nominal diameter of at least 3 mm and they shall not be used for any electrical connection. Screws used for electrical connections shall screw into metal.		N/A
17.2	Electrical connections carrying a current exceeding 0,5 A shall be constructed so that contact pressure is not transmitted through insulating material that is liable to shrink or to distort unless there is sufficient resiliency in the metallic parts to compensate for any possible shrinkage or distortion of the insulating material.		P
18	Clearances and creepage distances		N/A
	Clearances and creepage distances of functional insulation shall not be less than 0,5 mm.	>0.7 mm	N/A
19	Resistance to heat and fire		P
19.1	External parts of non-metallic material enclosing electric parts, and parts of insulating material supporting electric parts, shall be sufficiently resistant to heat if the toy has a working voltage exceeding 12 V and a current exceeding 3 A.		P
19.2	Parts of non-metallic material enclosing electric parts, and parts of insulating material supporting electric parts, shall be resistant to ignition and spread of fire.		P
19.2.1	Parts of non-metallic material are subjected to the glow-wire test of IEC 60695-2-11 which is carried out at 550 °C.		P
20	Radiation, toxicity and similar hazards		P
	Toys shall not present a toxic or similar hazard.		P

ANNEX A: Photo-documentation

Photo 1



Photo 2



End of report