

PHỤ LỤC

BẢNG P1.1 : CÁC THÔNG SỐ KỸ THUẬT CỦA ĐỘNG CƠ ĐIỆN K

Kiểu động cơ	Công suất		Vận tốc quay, vg/ph		$\eta\%$	Cos φ	$\frac{I_K}{I_{dn}}$	$\frac{T_K}{T_{dn}}$	Khối lượng kg
	kW	mã lực	50Hz	60Hz					
2p = 2 220V/380V.									
K90S2	0,75	1,0	2845	3430	77,5	0,87	5	1,9	17
K90 L2	1,1	1,5	2850	3432	78,5	0,87	6,7	2,4	20
K100L2	1,5	2,0	2860	3435	79,5	0,87	6,9	2,5	24
K112S2	2,2	3,0	2880	3460	82,0	0,88	7,3	2,7	36
K112M2	3,0	4,0	2890	3462	83,5	0,90	7,0	2,5	42
K132S2	4,0	5,5	2890	3462	84,5	0,90	6,8	2,5	60
K132M2	5,5	7,5	2900	3480	85,0	0,93	7,0	2,2	73
K160S2	7,5	10,0	2935	3519	86,0	0,93	7,3	2,2	94
K160M2	11	13,0	2935	3519	87,0	0,90	6,3	2,1	110
K160L2	15	19,5	2950	3538	87,0	0,90	7,0	2,1	158
K180L2	18,5	25	2950	3538	87,0	0,90	6,7	2,2	202
K200M2	22	30	2950	3538	87,0	0,90	7,0	2,1	233
K200L2	30	40	2950	3538	88,0	0,91	7,0	2,1	312
2p = 4 220V/380V									
K90S4	0,75	1,0	1420	1704	73,5	0,76	4,6.	2,1	17
K90L4	1,1	1,5	1420	1704	77,0	0,78	5,6	2,3	20
K100L4	1,5	2,0	1425	1710	79,0	0,80	5,9	2,3	24
K112S4	2,2	3,0	1440	1730	81,5	0,82	5,4	2,2	35
K112M4	3,0	4,0	1445	1732	82,0	0,83	5,9	2,0	41
K132S4	4,0	5,5	1445	1732	85,0	0,83	6,0	2,0	58
K132M4	5,5	7,5	1445	1732	86,0	0,86	5,9	2,0	72
K160S4	7,5	10,0	1450	1740	87,5	0,86	5,8	2,2	94
K160M4	11	13,5	1450	1740	87,5	0,87	6,1	1,6	110
K180M4	15	19,5	1450	1740	87,5	0,87	5,5	1,6	159
K180L4	18,5	25,0	1455	1745	88,0	0,88	5,9	2,0	211
K200M4	22	30,0	1475	1774	89,0	0,89	5,5	2,0	251
K200L4	30	40,0	1475	1774	89,0	0,89	5,5	2,0	320

BẢNG P1.2 : CÁC THÔNG SỐ KỸ THUẬT CỦA ĐỘNG CƠ ĐIỆN DK

Kiểu động cơ	Công suất kW	Vận tốc quay, vg/ph	$\cos\varphi$	$T_k/T_{đn}$	$\frac{T_{max}}{T_{đn}}$	Mômen vô lăng của rôto GD^2, kgm^2	Khối lượng kg
$2p = 2, n_{đb} = 3000 \text{ vg/ph}$							
DK.31-2	0,6	2860	0,85	2	2,4	0,01	24
32-2	1	2850	0,86	2	2,2	0,016	27
41-2	1,7	2880	0,87	1,8	2,4	0,03	39
42-2	2,8	2880	0,88	1,9	2,5	0,04	47
51-2	4,5	2900	0,88	1,6	2,4	0,12	84
52-2	7	2900	0,89	1,7	2,5	0,17	104
62-2	10	2930	0,89	1,3	2,5	0,41	170
63-2	14	2930	0,90	1,5	2,9	0,5	190
82-2	33	2935	0,91	1,1	2,5	1,8	477
$2p = 4 ; n_{đb} = 1500 \text{ vg/ph}$							
Dk.31-4	0,6	1410	0,76	1,8	1,8	0,015	24
32-4	1	1400	0,79	1,8	2	0,021	27
41-4	1,7	1420	0,82	1,8	2	0,048	39
42-4	2,8	1420	0,84	1,9	2	0,067	47
51-4	4,5	1440	0,85	1,4	2	0,20	84
52-4	7	1440	0,85	1,5	2	0,28	104
62-4	10	1460	0,88	1,3	2,3	0,60	170
63-4	14	1460	0,88	1,4	2,3	0,75	190
72-4	20	1460	0,88	1,3	2,3	1,5	280
73-4	28	1460	0,88	1,4	2,3	1,9	310
$2p = 6 ; n_{đb} = 1000 \text{ vg/ph}$							
DK32-6	0,6	930	0,69	1,2	1,9	0,02	27
41-6	1	930	0,72	1,3	1,8	0,048	39
42-6	1,7	930	0,75	1,4	1,8	0,067	47
51-6	2,8	950	0,78	1,3	1,8	0,20	84
52-6	4,5	950	0,80	1,5	1,8	0,28	104
62-6	7	960	0,81	1,4	2,2	0,60	170
63-6	10	960	0,82	1,4	2,2	0,75	190
72-6	14	980	0,83	1,4	2,2	2,3	280
73-6	20	975	0,84	1,4	2,2	3,0	310
83-6	33	980	0,88	1,4	2,4	5,7	540
84-6	40	980	0,86	1,5	2,2	6,5	590
$2p = 8 ; n_{đb} = 750 \text{ vg/ph}$							
DK73-8	14	730	0,81	1,3	2,0	3,0	310
DK82-8	22	730	0,85	1,4	2,0	5,0	450
DK83-8	30	730	0,83	1,4	2,0	6,5	830
DK94-8	55	735	0,85	1,8	2,0	14,0	950
DK103-8	75	735	0,85	1,3	2,4	26,0	1240

BẢNG P1.3: CÁC THÔNG SỐ KỸ THUẬT CỦA ĐỘNG CƠ 4 A

Kiểu động cơ	Công suất kW	Vận tốc quay, vg/ph	cosφ	η%	$\frac{T_{max}}{T_{dn}}$	$\frac{T_K}{T_{dn}}$
2p = 21; n_{đb} = 3000vg/ph						
4A50A2Y3	0,09	2742	0,70	60	2,2	2,0
4A50B2Y3	0,12	2710	0,70	63	2,2	2,0
4AA56A2Y3	0,18	2760	0,76	66	2,2	2,0
4AA63B2Y3	0,25	2760	0,77	68	2,2	2,0
4AA63A2Y3	0,37	2750	0,86	70	2,2	2,0
4AA63B2Y3	0,55	2745	0,86	73	2,2	2,0
4A71A2Y3	0,75	2840	0,87	77	2,2	2,0
4A71B2Y3	1,10	2810	0,87	77,5	2,2	2,0
4A80A2Y3	1,50	2850	0,85	81	2,2	2,0
4A80B2Y3	2,20	2850	0,87	83	2,2	2,0
4A90L2Y3	3,0	2838	0,88	84,5	2,2	2,0
4A100S2Y3	4,0	2880	0,89	86,5	2,2	2,0
4A100L2Y3	5,5	2880	0,91	87,5	2,2	2,0
4A112M2Y3	7,5	2922	0,88	87,5	2,2	2,0
4A132M2Y3	11,0	2907	0,90	88	2,2	1,6
4A160S2Y3	15,0	2930	0,91	88	2,2	1,4
4A160M2Y3	18,5	2930	0,92	88,5	2,2	1,4
4A180S2Y3	22,0	2940	0,91	88,5	2,2	1,4
4A180M2Y3	30	2943	0,92	90,5	2,2	1,4
4A200M2Y3	37	2943	0,89	90	2,2	1,4
4A200L2Y3	45	2946	0,90	91	2,2	1,4
4A225M2Y3	55	2937	0,92	91	2,2	1,2
4A250S2Y3	75	2958	0,89	91	2,2	1,2
4A250M2Y3	90	2958	0,90	92	2,2	1,2
4A280S2Y3	110	2940	0,89	91	2,2	1,2
4A280M2Y3	132	2940	0,89	91,5	2,2	1,2
4A315S2Y3	160	2943	0,90	92	1,9	1,0
4A315M2Y3	200	2943	0,90	92,5	1,9	1,0
4A355S2Y3	250	2943	0,90	92,5	1,9	1,0
4A355M2Y3	315	2940	0,91	93	1,9	1,0
2p = 4 ; n_{đb} = 1500vg/ph						
4A50A4Y3	0,06	1378	0,60	50	2,2	2,0
4A50B4Y3	0,09	1370	0,60	55	2,2	2,0
4AA56A4Y3	0,12	1380	0,66	63	2,2	2,0
4AA56B4Y3	0,18	1370	0,64	64	2,2	2,0
4AA63A4Y3	0,25	1380	0,65	68	2,2	2,0
4AA63B4Y3	0,37	1365	0,69	68	2,2	2,0
4A71A4Y3	0,55	1370	0,70	70,5	2,2	2,0
4A71B4Y3	0,75	1370	0,73	72	2,2	2,0
4A80A4Y3	1,10	1400	0,81	75	2,2	2,0
4A80B4Y3	1,50	1400	0,83	77	2,2	2,0
4AX90L4Y3	2,20	1420	0,83	80	2,2	2,0


Kiểu động cơ	Công suất kW	Vận tốc quay, vg/ph	$\cos\varphi$	$\eta\%$	$\frac{T_{\max}}{T_{\text{đn}}}$	$\frac{T_K}{T_{\text{đn}}}$
4A100S4Y3	3,0	1420	0,83	82	2,2	2,0
4A100L4Y3	4,0	1420	0,84	84	2,2	2,0
4A112M4Y3	5,5	1425	0,85	85,5	2,2	2,0
4A132S4Y3	7,5	1455	0,86	87,5	2,2	2,0
4A132M4Y3	11,0	1458	0,87	87,5	2,2	2,0
4A160S4Y3	15,0	1460	0,88	89	2,2	1,4
4A160M4Y3	18,5	1460	0,88	90	2,2	1,4
4A180S4Y3	22,0	1470	0,90	90	2,2	1,4
4A180M4Y3	30,0	1470	0,90	91	2,2	1,4
4A200M4Y3	37	1475	0,90	91	2,2	1,4
4A200L4Y3	45	1473	0,90	92	2,2	1,4
4A225M4Y3	55	1470	0,90	92,5	2,2	1,2
4A250S4Y3	75	1480	0,90	93	2,2	1,2
4A250M4Y3	90	1480	0,91	93	2,2	1,2
4A280S4Y3	110	1465	0,90	92,5	2,0	1,2
4A280M4Y3	132	1465	0,90	93	2,0	1,2
4A315S4Y3	160	1470	0,91	93,5	1,9	1,0
4A315M4Y3	200	1475	0,92	94	1,9	1,0
4A355S4Y3	250	1475	0,92	94,5	1,9	1,0
4A355M4Y3	315	1475	0,92	94,5	1,9	1,0

$2p = 6$; $n_{\text{đb}} = 1000\text{vg/ph}$


4AA63A6Y3	0,18	885	0,62	56	2,2	2,0
4AA63B6Y3	0,25	892	0,62	59	2,2	2,0
4A71A6Y3	0,37	920	0,69	64,5	2,2	2,0
4A71B6Y3	0,55	920	0,71	67,5	2,2	2,0
4A80A6Y3	0,75	920	0,74	69	2,2	2,0
4A80B6Y3	1,10	920	0,74	74	2,2	2,0
4A90L6Y3	1,5	936	0,74	75	2,2	2,0
4A100L6Y3	2,2	950	0,73	81	2,2	2,0
4A112MA6Y3	3,0	945	0,76	81	2,2	2,0
4A112MB6Y3	4,0	950	0,81	82	2,2	2,0
4A132S6Y3	5,5	960	0,80	85	2,2	2,0
4A132M6Y3	7,5	968	0,81	85,5	2,2	2,0
4A160S6Y3	11,0	970	0,86	86	2,0	1,2
4A160M6Y3	15,0	970	0,87	87,5	2,0	1,2
4A180M6Y3	18,5	973	0,87	88	2,0	1,2
4A200M6Y3	22,0	975	0,90	90	2,0	1,2
4A200L6Y3	30	977	0,90	90,5	2,0	1,2
4A225M6Y3	37	980	0,89	91	2,0	1,2
4A250S6Y3	45	985	0,89	91,5	2,0	1,2
4A250M6Y3	55	985	0,89	92	2,0	1,2
4A280S6Y3	75	980	0,89	92	1,9	1,2
4A280M6Y3	90	980	0,89	92,5	1,9	1,2
4A315S6Y3	110	980	0,90	93	1,9	1,0

Kiểu động cơ	Công suất kW	Vận tốc quay, vg/ph	$\cos\varphi$	$\eta\%$	$\frac{T_{max}}{T_{dn}}$	$\frac{T_K}{T_{dn}}$
4A315M6Y3	132	980	0,90	93,5	1,9	1,0
4A355S6Y3	160	982	0,90	93,5	1,9	1,0
4A355M6Y3	200	982	0,90	94	1,9	1,0
2p = 8 ; n_{db} = 750 vg/ph						
4A71B8Y3	0,25	680	0,65	56	1,7	1,6
4A80A8Y3	0,37	675	0,65	61,5	1,7	1,6
4A80B8Y3	0,55	675	0,65	64	1,7	1,6
4A90LA8Y3	0,75	705	0,62	68	1,7	1,6
4A90LB8Y3	1,10	698	0,68	70	1,7	1,6
4A100L8Y3	1,50	698	0,65	74	1,7	1,6
4A112MA8Y3	2,20	705	0,71	76,5	2,2	1,8
4A112MB8Y3	3,0	701	0,74	79	2,2	1,8
4A132S8Y3	4,0	720	0,70	83	2,2	1,8
4A132M8Y3	5,5	716	0,74	83	2,2	1,8
4A160S8Y3	7,5	730	0,75	86	2,2	1,4
4A160M8Y3	11,0	730	0,75	87	2,2	1,4
4A180M8Y3	15,0	730	0,82	87,5	2,0	1,2
4A200M8Y3	18,5	731	0,84	88,5	2,2	1,2
4A200L8Y3	22,0	730	0,84	88,5	2,0	1,2
4A225M8Y3	30	735	0,81	90	2,0	1,2
4A250S8Y3	37	738	0,83	90	2,0	1,2
4A250M8Y3	45	740	0,84	91,5	2,0	1,2
4A280S8Y3	55	734	0,84	92	1,9	1,2
4A280M8Y3	75	734	0,85	92,5	1,9	1,2
4A315S8Y3	90	735	0,85	93	1,9	1,0
4A315M8Y3	110	735	0,85	93	1,9	1,0
4A355S8Y3	132	735	0,85	93,5	1,9	1,0
4A355M8Y3	160	735	0,85	93,5	1,9	1,0
2p = 10 ; n_{db} = 600 vg/ph						
4A250S10Y3	30	590	0,81	88	1,9	1,2
4A250M10Y3	37	590	0,81	89	1,9	1,2
4A280S10Y3	37	588	0,78	91	1,8	1,0
4A280M10Y3	45	588	0,78	91,5	1,8	1,0
4A315S10Y3	55	588	0,79	92	1,8	1,0
4A315M10Y3	75	588	0,80	92	1,8	1,0
4A355S10Y3	90	588	0,83	92,5	1,8	1,0
4A355M10Y3	110	588	0,83	93	1,8	1,0
2p = 12 ; n_{db} = 500 vg/ph						
4A315S12Y3	45	488	0,75	90,5	1,8	1,0
4A315M12Y3	55	488	0,75	91	1,8	1,0
4A355S12Y3	75	490	0,76	91,5	1,8	1,0
4A355M12Y3	90	490	0,76	92	1,8	1,0

BẢNG P1.4 : KÍCH THƯỚC ĐỘNG CƠ K, mm, KIỂU NÀM NGANG

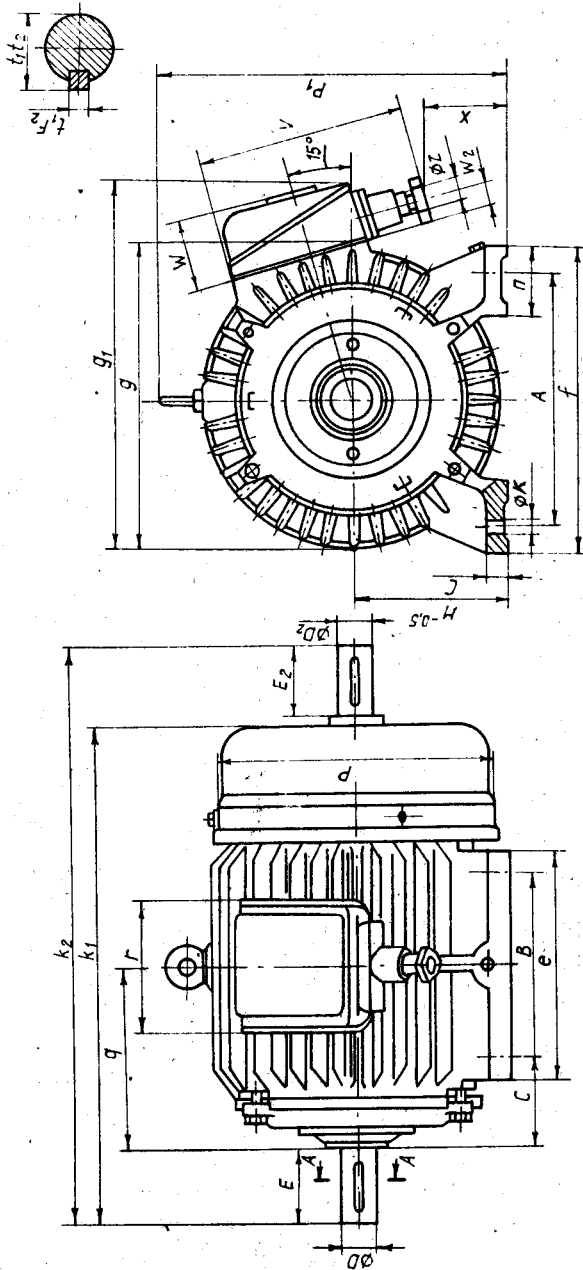
[illegible]

BẢNG P1.5 : KÍCH THƯỚC ĐỘNG CƠ K, mm, KIỂU CÓ BÍCH

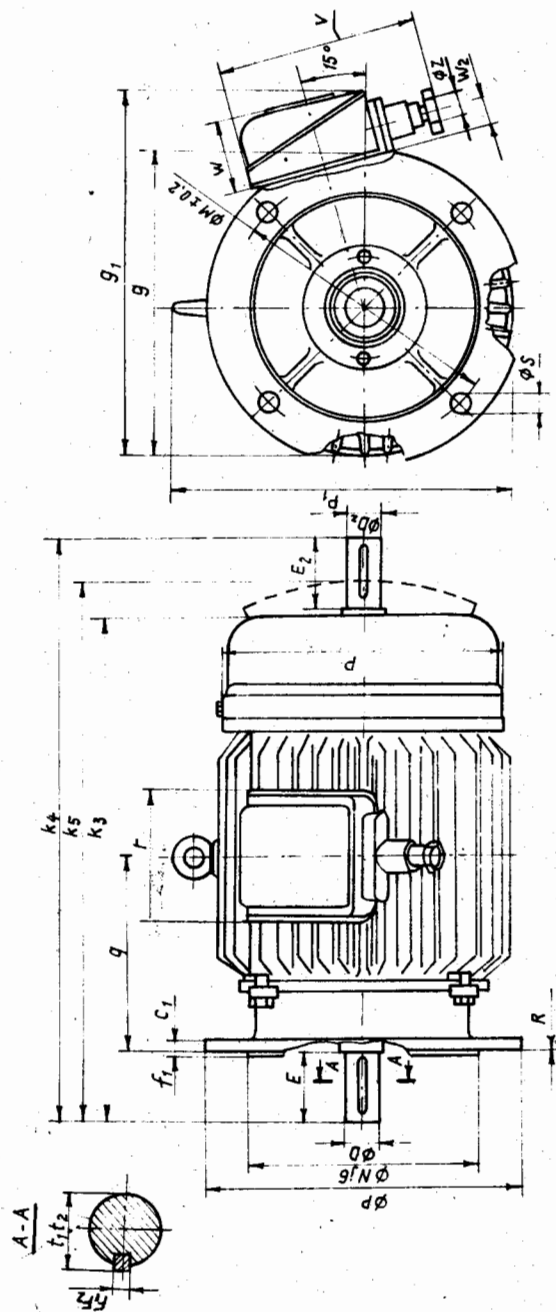


	ØM	ØN	ØP	R	ØS	f1	c1	ØD	E	g	g1	P	P1	q	k3	k5	k4	F	t	r	v	w	ØZ
K80M	130	110	160	0	9	3,5	9	18	44	172	213	176	-	120	304	334	343	6	20,5	80	120	44	
K90S																							
K90L	165	130	200	0	11	3,5	10	18	44	182	223	176	-	129	313	343	353	6	20,5	80	125	44	16
K100S																							
K100L	165	130	200	0	11	3,5	10	22	54	203	250	190	235	141,5	354	368	403	6	24,5	100	145	52	21
K112S																							
K112M	225	180	250	0	14	4	12	28	64	228	275	220	259	162	411	441	470	8	31	100	145	52	21
K132S																							
K132M	265	230	300	0	14	4	14	32	84	270	328	258	299	184	474	508	543	10	35,5	130	185	63	29
K160S																							
K160M	300	250	350	0	18	5	16	38	84	330	395	315	363,5	203	512	546	581	10	41,5	130	185	63	29
K180S																							
K180M	300	250	350	0	18	5	16	42	114	343	421	354	398	248	644	694	736	12	45,5	150	206	78	29
K200S																							
K200M	400	350	450	0	18	5	20	48	114	405	438	396	449,5	266,5	720	770	842	14	52	150	206	78	29

BẢNG P1.6 : KÍCH THƯỚC CỦA ĐỘNG CƠ DK, mm

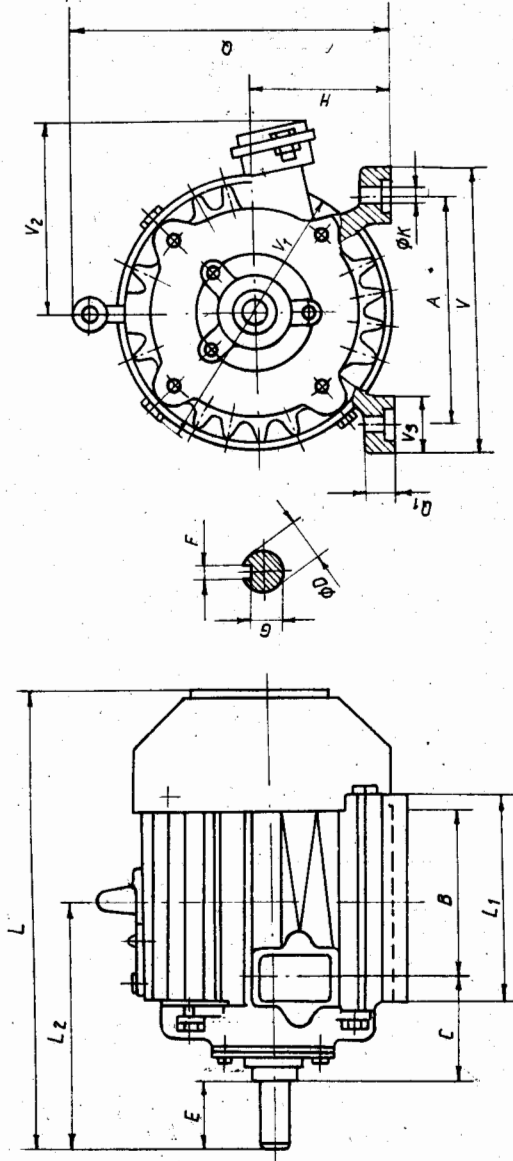

Kiểu động cơ	H	A	B	C	ΦK	ΦD	E	F	G	L	L ₁	L ₂	V	V ₁	V ₂	V ₃	Q	Q ₁
DK31	100	170	90	70	12,5	18	40	5	15	300	120	155	210	207	158	40	200	16
32	100	170	120	70	12,5	18	40	5	15	335	150	170	210	207	158	40	200	16
41	125	210	110	90	15	25	60	8	21	375	150	215	260	253	185	50	280	20
42	125	210	150	90	15	25	60	8	21	415	190	225	260	253	185	50	280	20
51	170	285	150	110	19	35	80	10	30,5	482	205	265	350	337	235	65	376	28
52	170	285	200	110	19	35	80	10	30,5	532	255	290	350	337	235	65	376	28
DK62-2	200	315	290	110	19	35	80	10	30,5	605	350	335	390	450	268	75	456	30
DK63-2	200	315	320	110	19	35	80	10	30,5	635	380	350	390	450	268	75	456	30
DK62-4	200	315	290	80	19	45	110	14	40	605	350	335	390	450	268	75	456	30
DK63-4	200	315	320	80	19	45	110	14	40	635	400	350	390	450	268	75	456	30
DK7	236	370	400	90	24	55	110	16	50	750	480	400	455	510	298	85	535	40
DK8	280	440	530	110	30	65	140	18	59,5	957	620	504	530	590	370	90	650	50
DK9	335	525	620	135	30	75	140	20	69	1115	750	568	625	680	450	115	765	60
DK10	400	625	620	163	30	85	170	24	78	1215	750	568	750	820	520	125	895	60

BẢNG P1.7 : KÍCH THƯỚC CỦA ĐỘNG CƠ 4A

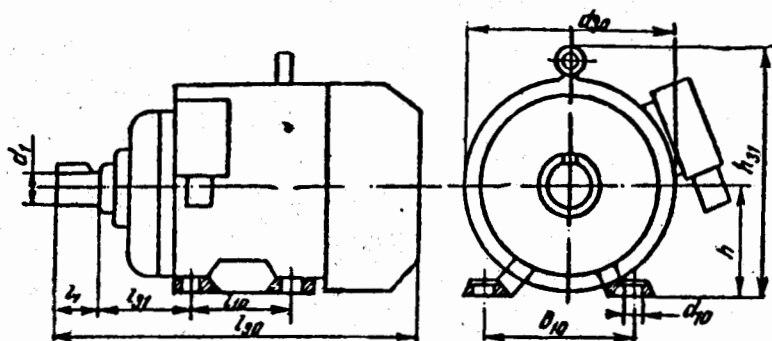

Kiểu	Số cực	Kích thước khuôn khổ, mm			Kích thước lắp đặt, mm							Khối lượng, kg						
		<i>l</i> 30	<i>h</i> 31	<i>d</i> 30	<i>l</i> 1	<i>l</i> 10	<i>l</i> 31	<i>d</i> 1	<i>d</i> 10	<i>b</i> 10	<i>h</i>							
1	2	3	4	5	6	7	8	9	10	11	12	13						
4AA50	2, 4	174	142	104	20	63	32	9	5,8	80	50	3,3						
4AA56	2, 4	194	152	120	23	71	36	11	5,8	90	56	4,5						
4AA63	2, 4, 6	216	162	130	30	80	40	14	7	100	63	6,3						
4A71	2, 4, 6, 8	285	203	170	40	90	45	19	7	112	71	15,1						
4A80A	2, 4, 6, 8	300	218	186	50	100	50	22	10	125	80	17,4						
4A80B	2, 4, 6, 8	320										20,4						
4A90L	2, 4, 6, 8	350	243	208	50	125	56	24	10	140	90	28,7						
4A100S	2, 4, 6, 8	362	263	235	60	112	63	28	12	160	100	36,0						
4A100L	2, 4, 6, 8	392				140						42,0						
4A112M	2, 4, 6, 8	452	310	260	80	140	70	32	12	190	112	56,0						
4A132S	2, 4, 6, 8	480	350	302			89	38		216	132	77,0						
4A132M	2, 4, 6, 8	530						42				93,0 130						
4A160S	2	624						48	15	254	160		135					
	4, 6, 8							48				145						
4A160M	2	667	430	358	110	210	108	42				254	160	160				
	4, 6, 8							48						165				
4A180S	2	662						48	15	279	180			175				
	4, 6, 8							55						175				
			470	410			121											


(Tiếp bảng P1.7)

1	2	3	4	5	6	7	8	9	10	11	12	13	
4A180M	2	702			110	241		48				185	
	4, 6, 8							55				195	
4A200M	2	760	535	450	140	267	133	60	19	318	200	255	
	4, 6, 8	790										270	
4A200L	2	800			110	305		55					280
	4, 6, 8	830			140			60				310	
4A225M	2	810	575	494	110	311	149	55		24	356	225	355
	4, 6, 8	840						65					335
4A250S	2	915	640	554	140		168	75	406		250	470	
4, 6, 8	2												65
4A250M	2	955			349	75		510					
	4, 6, 8												75
4A280S	2	1140	700		140	368	190	70	24	457	280	810	
	4, 6, 8 10	1170			170			80					
4A280M	2	1180			140	419		70				870	
	4, 6, 8 10	1210			170			80					
4A315S	2	1235	765		140	406	216	75	28	508	315	1005	
4, 6, 8, 10, 12	1265	170			90								
4A315M	2	1285			140	457		75				1130	
	4, 6, 8, 10, 12	1315			170			90					
4A355S	2	1350	855		170	500	254	85	28	610	355	1420	
	4, 6, 8, 10, 12	1390			210			100					
4A355M	2	1410			170	560		85				1670	
	4, 6, 8, 10, 12	1450			210			100					

BẢNG P1.8 : CÁC THÔNG SỐ KỸ THUẬT CỦA ĐỘNG CƠ CÁN TRỤC MTKF

Kiểu	Công suất trên trục, kW, khi						n vg/ph	$\cos\varphi$	T_{max} Nm	T_k Nm	Khối lượng, kg
	ts-15%	ts-25%	ts-40%	ts-60%	30 phút	60 phút					
1	2	3	4	5	6	7	8	9	10	11	12
MTKF 011-6	2	1,7	1,4	1,2	1,4	1,2	780	0,81	42	42	47
							835	0,74			
							875	0,66			
							900	0,61			
MTKF 012-6	3,1	2,7	2,2	1,7	2,2	1,7	785	0,82	67	67	53
							835	0,77			
							880	0,69			
							915	0,60			
MTKF 111-6	4,5	4,1	3,5	2,8	3,5	2,8	825	0,85	105	104	70
							850	0,83			
							885	0,79			
							915	0,71			
MTKF 112-6	6,5	5,8	5	4	5	4	845	0,83	175	175	80
							870	0,80			
							895	0,74			
							920	0,65			
MTKF 211-6	10,5	9	7,5	6	7,5	6	800	0,83	220	210	110
							840	0,81			
							880	0,77			
							910	0,69			
MTKF 311-6	14	13	11	9	11	9	880	0,82	390	380	155
							895	0,80			
							910	0,76			
							930	0,69			
MTKF 312-6	19,5	17,5	15	12	15	12	900	0,83	600	590	195
							915	0,82			
							930	0,78			
							945	0,71			
MTKF 411-6	30	27	22	18	22	18	905	0,85	780	720	255
							915	0,83			
							935	0,79			
							950	0,73			
MTKF 412-6	40	36	30	25	30	25	910	0,84	1000	950	315
							920	0,82			
							935	0,78			
							950	0,73			
MTKF 311-8	10,5	9	7,5	6	7,5	6	660	0,81	330	320	155
							670	0,77			
							690	0,71			
							705	0,62			
MTKF 312-8	15	13	11	8,2	11	8,2	675	0,83	510	470	196
							690	0,79			
							700	0,74			
							710	0,63			

BẢNG P1.9 : KÍCH THƯỚC CỦA ĐỘNG CƠ CÁN TRỤC MTKF

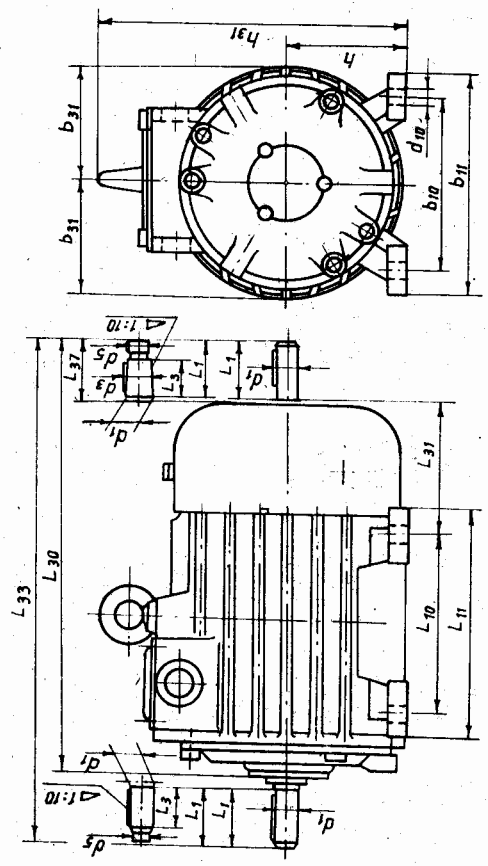

Kiểu động cơ	Kích thước, mm																	Đầu trục	Khối lượng, kg
	b ₁₀	b ₁₁	b ₃₁	d ₁	d ₃	d ₅	d ₁₀	h	h ₃₁	L ₁	L ₃	L ₁₀	L ₁₁	L ₃₀	L ₃₁	L ₃₃	L ₃₇		
MTKF 011	180	230	118	28			19	112	302	60		150	200	415,5	132	485	64,5	trụ	47
MTKF 012																			53
MTKF 111	220	290	134	35				132	342	80		190	240	450,5	127	520	64,5		70
MTKF 112																			80
MTKF 211	245	320	156,6	40			24	160	385	110		235	285	524,5	135	614	85,5		110
MTKF 311	280	350		50				180	444			260	320	637	155	748,5	118		155
MTKF 312			180									320	380	712	170	823,5	118		195
MTKF 411	330	440	211	65	59,75	M42x2	28	225	527	140		335	395	749	175	899	147	côn	255
MTKF 412											105	420	480	824	165	974	147		

BẢNG P.2.1 : TRỊ SỐ $\operatorname{inv} \alpha = \operatorname{tg} \alpha - \alpha$

α°	Phần trị số chung cho cả dòng	0'	5'	10'	15'	20'	25'	30'	35'	40'	45'	50'	55'
1	2	3	4	5	6	7	8	9	10	11	12	13	14
1	0,000	00177	00225	00281	00346	00420	00504	00598	00704	00821	00950	01092	01248
2	0,000	01418	01603	01804	02020	02253	02503	02771	03058	03364	03689	04035	04402
3	0,000	04790	05201	05643	06091	06573	07079	07610	08167	08751	09362	10000	10668
4	0,000	11364	12090	12847	13634	14453	15305	16189	17107	18059	19045	20067	21125
5	0,000	22220	23352	24522	25731	26978	28266	29594	30963	32374	33827	35324	36864
6	0,000	03845	04008	04175	04317	04524	04706	04897	05093	05280	05481	05687	05898
7	0,000	06115	06337	06564	06797	07035	07279	07528	07783	08044	08310	08582	08861
8	0,000	09145	09435	09732	10034	10343	10559	10980	11308	11643	11984	12332	12687
9	0,000	13048	13416	13792	14174	14563	14960	15363	15774	16193	16618	17051	17492
10	0,000	17941	18397	18860	19332	19812	20299	20795	21299	21810	22330	22859	23396
11	0,000	23941	24495	25057	25628	26208	26797	27394	28001	28616	29241	29875	30518
12	0,000	31171	31832	32504	33185	33875	34575	35285	36005	36735	37474	38224	38984
13	0,000	39754	40534	41325	42126	42938	43760	44593	45437	46291	47157	48033	48921
14	0,000	49819	50729	51650	52582	53526	54482	55448	56427	57417	58420	59434	60460
15	0,000	61498	62548	63611	64686	65773	66873	67985	69110	70248	71398	72561	73738
16	0,000	07493	07613	07735	07857	07982	08107	08234	08362	08492	08623	08756	08889
17	0,000	09025	09161	09299	09439	09580	09722	09866	10012	10158	10307	10456	10608
18	0,000	10760	10915	11071	11228	11387	11547	11709	11873	12038	12205	12373	12543
19	0,000	12715	12888	13063	13240	13418	13598	13779	13963	14148	14334	14523	14713
20	0,000	14904	15098	15293	15490	15689	15890	16092	16296	16502	16710	16920	17132
21	0,000	17345	17560	17777	17996	18217	18440	18665	18891	19120	19350	19583	19817
22	0,000	20054	20292	20533	20775	21019	21266	21514	21765	22018	22272	22529	22788
23	0,000	23049	23312	23577	23845	24114	24386	24660	24936	25214	25495	25778	26062
24	0,000	26350	26639	26931	27225	27521	27820	28121	28424	28729	29037	29348	29660
25	0,000	29975	30293	30613	30935	31260	31587	31917	32249	32583	32920	33260	33602
26	0,000	33947	34294	34644	34997	35352	35709	36069	36432	36796	37168	37537	37910
27	0,000	38287	38666	39047	39432	39819	40209	40602	40997	41395	41797	42201	42607

1	2	3	4	5	6	7	8	9	10	11	12	13	14
28	0,0	43017	43430	43845	44264	44685	45110	45537	45967	46400	46837	47276	47718
29	0,0	48164	48612	49064	49518	49976	50437	50901	51368	51838	52312	52788	53268
30	0,0	53751	54238	54728	55221	55717	56217	56720	57226	57736	58249	58765	59285
31	0,0	59809	60336	60866	61400	61937	62478	63022	63570	64122	64677	65236	65799
32	0,0	66364	66934	67507	68084	68665	69250	69838	70430	71026	71626	72230	72838
33	0,0	73449	74064	74684	75307	75934	76565	77200	77839	78483	79130	79781	80437
34	0,0	81097	81760	82428	83100	83777	84457	85142	85832	86525	87223	87925	88631
35	0,0	89342	90058	90777	91502	92230	92963	93701	94443	95190	95942	96698	97459
36	0,	09822	09899	09977	10055	10133	10212	10292	10371	10452	10533	10614	10696
37	0,	10778	10861	10944	11028	11113	11197	11283	11369	11455	11542	11630	11718
38	0,	11806	11895	11985	12075	12165	12257	12348	12441	12534	12627	12721	12815
39	0,	12911	13006	13102	13199	13297	13395	13493	13592	13692	13792	13893	13995
40	0,	14097	14200	14303	14407	14511	14616	14722	14829	14936	15043	15152	15261
41	0,	15370	15480	15591	15703	15815	15928	16041	16156	16270	16386	16502	16619
42	0,	16737	16855	16974	17093	17214	17336	17457	17579	17702	17826	17951	18076
43	0,	18202	18329	18457	18585	18714	18844	18975	19106	19238	19371	19505	19639
44	0,	19774	19910	20047	20185	20323	20463	20603	20743	20885	21028	21171	21315
45	0,	21460	21606	21753	21900	22049	22198	22348	22499	22651	22804	22958	23112
46	0,	23268	23424	23582	23740	23899	24059	24220	24382	24545	24709	24874	25040
47	0,	25206	25374	25543	25713	25883	26055	26288	26401	26576	26752	26929	27107
48	0,	27285	27465	27646	27828	28012	28196	28381	28567	28755	28943	29133	29324
49	0,	29516	29709	29903	30098	30295	30492	30691	30891	31092	31295	31498	31703
50	0,	31909	32116	32324	32534	32745	32957	33171	33385	33601	33818	34037	34257
51	0,	34478	34700	34924	35149	35376	35604	35833	36063	36295	36529	36763	36999
52	0,	37237	37476	37716	37958	38202	38446	38693	38941	39190	39441	39693	39947
53	0,	40202	40459	40717	40977	41239	41502	41767	42034	42302	42571	42843	43116
54	0,	43390	43667	43945	44225	44506	44789	45074	45361	45650	45940	46232	46526
55	0,	46822	47119	47419	47720	48023	48328	48635	48944	49255	49568	49882	50199
56	0,	50518	50838	51161	51486	51813	52141	52472	52805	53141	53478	53817	54159
57	0,	54503	54849	55197	55547	55900	56255	56612	56972	57333	57698	58064	58433
58	0,	58804	59178	59554	59933	60314	60697	61083	61472	61863	62257	62653	63052
59	0,	63454	63858	64265	64674	65086	65501	65919	66340	66763	67189	67618	68050

BẢNG P2.2 : CÁC THÔNG SỐ CƠ BẢN CỦA MỘT SỐ CẤP BÁNH RĂNG CÓN RĂNG CUNG TRÒN CÓ $\beta_m = 35^\circ$

u	Z ₁	-Z ₂	U _{thực}	m _{te}	mm					h _e	δ	độ			δ _f	d _{ae}	s _e	B	T _l , Nm
					d _{e1}	d _{e2}	R _e	b	đ _đ			δ _a	đ _f						
1,0	21	22	1,05	3,0	63,0	66,0	45,62	13	5,7	43°40' 46,20	47°45' 50,09	39°51' 42,15	66,85 69,37	4,93 4,50	31,16 29,74	47			
	22	23	1,05	3,5	77,0	80,5	55,70	16	6,65	43,44 46,16	47,38 49,55	40,05 42,22	81,47 84,45	5,74 5,25	38,11 36,44	93			
	28	29	1,04	3,1	86,7	89,9	62,48	18	5,89	44,00 46,00	47,04 48,54	41,06 42,56	90,73 93,43	5,05 4,69	43,05 41,58	135			
	28	29	1,04	3,4	95,2	98,6	68,53	20	6,46	44,00 46,00	47,04 48,54	41,06 42,56	99,50 102,48	5,53 5,15	47,22 45,60	180			
1,25	19	24	1,26	3,3	62,7	79,2	50,51	15	6,27	38,22 51,38	42,51 55,00	35,00 47,09	67,88 82,07	5,65 4,71	37,55 29,54	61			
	24	30	1,25	3,0	72,0	90,0	57,63	17	5,70	38,40 51,20	42,15 54,01	35,59 47,45	76,68 92,62	5,14 4,29	43,13 34,37	95			
	24	30	1,25	3,3	79,2	99,0	63,39	18	6,27	38,40 51,20	42,15 54,01	35,59 47,45	84,35 101,89	5,66 4,71	47,43 37,81	122			
	26	32	1,23	3,5	91,0	112,0	72,15	21	6,65	39,06 50,54	42,24 53,26	36,34 47,36	96,39 115,13	5,97 5,03	53,80 43,59	190			
1,4	18	25	1,39	3,2	57,6	80,0	49,29	14	6,08	35°45' 54,15	40°22' 57,26	32°34' 49,38	63,02 82,45	5,61 4,45	38,05 27,10	50			
	21	30	1,43	3,0	63,0	90,0	54,93	16	5,70	35,00 55,00	38,54 57,39	32,21 51,06	68,16 92,24	5,28 4,15	43,19 29,91	73			
	22	31	1,41	3,2	70,4	99,2	60,82	18	6,08	35,22 54,38	39,08 57,12	32,48 50,52	75,88 101,61	5,63 4,42	47,66 33,50	101			
	24	34	1,42	3,3	79,2	112,9	68,67	20	6,27	35,13 54,47	38,39 57,07	32,53 51,21	84,87 114,67	5,84 4,53	54,10 37,85	145			
1,6	17	27	1,59	3,0	51,0	81,0	47,86	14	5,70	32,12 57,48	36,49 60,42	29,18 53,11	56,53 82,95	5,36 4,07	38,76 23,96	41			
	18	29	1,61	3,1	55,8	89,9	52,90	15	5,89	31,50 58,10	36,11 60,51	29,09 53,49	61,59 91,86	5,62 4,12	43,15 26,33	55			
	23	37	1,61	3,0	69,0	111,0	65,35	19	5,70	31,52 58,08	35,17 60,14	29,46 54,43	74,61 112,90	5,50 3,93	53,76 32,97	113			
	23	37	1,61	3,8	87,4	140,6	82,78	24	7,22	31,52 58,08	35,17 60,14	29,46 54,43	94,50 143,01	6,97 4,97	68,09 41,76	229			

Tiếp bảng P2.2

u	Z ₁	Z ₂	u _{hrc}	m _{te}	d _{e1}	d _{e2}	R _e	b	h _e	độ				δ _f	d _{ae}	s _e	B	T ₁ , Nm
										δ	δ _a	30°, 19'	25°, 49'					
2,0	15	31	2,07	3,25	48,75	100,75	55,96	16	6,18	25°, 49'	30°, 19'	23°, 21'	55,51	23°, 21'	55,51	6,08	48,73	49
	16	33	2,06	3,4	54,4	112,2	62,35	18	6,46	25,52	30,06	23,33	61,49	23,33	61,49	6,38	54,38	69
	20	41	2,05	3,0	60,0	123,0	68,43	20	5,70	26,00	29,25	24,09	66,26	24,09	66,26	5,72	59,98	99
	20	41	2,05	3,4	68	139,4	77,55	22	6,46	26,00	29,25	24,08	75,08	24,08	75,08	6,48	67,98	141
2,5	15	38	2,53	3,3	49,5	125,4	67,41	20	6,27	21°, 32'	25°, 25'	19°, 32'	56,79	19°, 32'	56,79	6,40	61,25	71
	19	48	2,53	3,0	57,0	144,0	77,44	22	5,70	21,36	24,41	20,01	63,64	20,01	63,64	5,92	70,69	118
	19	48	2,53	3,3	62,7	158,4	85,18	25	6,27	21,36	24,41	20,01	70,01	20,01	70,01	6,51	77,75	157
	16	51	3,19	3,1	49,6	158,1	82,85	25	5,89	17,25	20,26	15,56	56,76	15,56	56,76	6,26	77,93	105
3,15	16	51	3,19	3,5	56,0	178,5	93,54	28	6,65	17,25	20,26	15,56	64,09	15,56	64,09	7,07	87,99	152
	15	59	3,93	3,4	51,0	200,6	103,49	30	6,46	14,16	16,56	12,59	59,04	12,59	59,04	7,00	99,28	145
4	15	59	3,93	3,8	57,0	224,2	115,67	34	7,22	14,16	16,56	12,59	65,99	12,59	65,99	7,83	110,96	207
	15	59	3,93	3,8	57,0	224,2	115,67	34	7,22	75,44	77,01	73,04	225,10	73,04	225,10	4,11	26,74	207

Chú thích 1. Các trị số phía trên dùng cho bánh côn nhỏ, phía dưới - bánh côn lớn.

2. Các trị số mômen xoắn T₁ trên bánh nhỏ được tính cho các cặp bánh răng côn có độ rắn mặt răng HRC > 45, cấp chính xác 7 và 8.

BẢNG P2. 3 : HỆ SỐ TÁI TRỌNG ĐỘNG

K_{HV} VÀ K_{Fv}

Cấp chính xác	Độ rắn mặt răng	Loại răng	v (m/s)					
			1	2	4	6	8	10
Hệ số K_{Hv}								
6	a	thẳng	1,03	1,06	1,12	1,17	1,23	1,28
		nghiêng	1,01	1,02	1,03	1,04	1,06	1,07
	b	thẳng	1,02	1,04	1,07	1,1	1,15	1,18
		nghiêng	1,00	1,00	1,02	1,02	1,03	1,04
7	a	thẳng	1,04	1,07	1,14	1,21	1,29	1,36
		nghiêng	1,02	1,03	1,05	1,06	1,07	1,08
	b	thẳng	1,03	1,05	1,09	1,14	1,19	1,24
		nghiêng	1,00	1,01	1,02	1,03	1,03	1,04
8	a	thẳng	1,04	1,08	1,16	1,24	1,32	1,4
		nghiêng	1,01	1,02	1,04	1,06	1,07	1,08
	b	thẳng	1,03	1,06	1,1	1,16	1,22	1,26
		nghiêng	1,01	1,01	1,02	1,03	1,04	1,05
9	a	thẳng	1,05	1,1	1,2	1,3	1,4	1,5
		nghiêng	1,01	1,03	1,05	1,07	1,09	1,12
	b	thẳng	1,04	1,07	1,13	1,2	1,26	1,32
		nghiêng	1,01	1,01	1,02	1,03	1,04	1,05
Hệ số K_{Fv}								
6	a	thẳng	1,06	1,13	1,26	1,40	1,53	1,67
		nghiêng	1,02	1,05	1,10	1,15	1,20	1,25
	b	thẳng	1,02	1,04	1,08	1,11	1,14	1,17
		nghiêng	1,01	1,02	1,03	1,04	1,06	1,07
7	a	thẳng	1,08	1,16	1,33	1,50	1,67	1,80
		nghiêng	1,03	1,06	1,11	1,16	1,22	1,27
	b	thẳng	1,03	1,05	1,09	1,13	1,17	1,22
		nghiêng	1,01	1,02	1,03	1,05	1,07	1,08
8	a	thẳng	1,10	1,20	1,38	1,58	1,78	1,96
		nghiêng	1,03	1,06	1,11	1,17	1,23	1,29
	b	thẳng	1,04	1,06	1,12	1,16	1,21	1,26
		nghiêng	1,01	1,02	1,03	1,05	1,07	1,08
9	a	thẳng	1,13	1,28	1,50	1,77	1,98	2,25
		nghiêng	1,04	1,07	1,14	1,21	1,28	1,35
	b	thẳng	1,04	1,07	1,14	1,21	1,27	1,34
		nghiêng	1,01	1,02	1,04	1,06	1,08	1,09

Chú thích về độ rắn mặt răng

a - HB1 < 350, HB2 < 350 hoặc HRC1 > 45, HB2 < 350;

b - HRC1 ≥ 45, HRC2 ≥ 45.

BẢNG P2. 4. REN HÌNH THANG MỘT

ĐÀU MỐI, mm

p	d ; D	d ₂ = D ₂	d ₃	D ₁ ; d ₁	D ₄	p	d ; D	d ₂ = D ₂	d ₃	D ₁ ; d ₁	D ₄
1	2	3	4	5	6	7	8	9	10	11	12
2,0	8	7,00	5,5	6,0	8,5	6,0	40	37,00	33,0	34,0	41,0
	10	9,00	7,5	8,0	10,5		42	39,00	35,0	36,0	43,0
	12	11,00	9,5	10,0	12,5		120	117,00	113,0	114,0	121,0
	14	13,00	11,5	12,0	14,5		130	127,00	123,0	124,0	131,0
	16	15,00	13,5	14,0	16,5		140	137,00	133,0	134,0	141,0
	18	17,00	15,5	16,0	18,5		150	147,00	143,0	144,0	151,0
	20	19,00	17,5	18,0	20,5						
	22	21,00	19,5	20,0	22,5		22	18,00	13,0	14,0	23,0
	24	23,00	21,5	22,0	24,5		24	20,00	15,0	16,0	25,0
	26	25,00	23,5	24,0	26,5		26	22,05	17,0	18,0	27,0
	28	27,00	25,5	26,0	28,5		28	24,00	19,0	20,0	29,0
							44	40,00	35,0	36,0	45,0
3,0	10	8,50	6,5	7,0	10,5	8,0	46	42,00	37,0	38,0	47,0
	12	10,50	8,5	9,0	12,5		48	44,00	39,0	40,0	49,0
	14	12,50	10,5	11,0	14,5		50	46,00	41,0	42,0	51,0
	30	28,50	26,5	27,0	30,5		52	48,00	43,0	44,0	53,0
	32	30,50	28,5	29,0	32,5		55	51,00	46,0	47,0	56,0
	34	32,50	30,5	31,0	34,5		60	56,00	51,0	52,0	61,0
	36	34,50	32,5	33,0	36,5		160	156,00	151,0	152,0	161,0
	38	36,50	34,5	35,0	38,5		170	166,00	161,0	162,0	171,0
	40	38,50	36,5	37,0	40,5		180	176,00	171,0	172,0	181,0
	42	40,50	38,5	39,0	42,5		190	186,00	181,0	182,0	191,0
	44	42,50	40,5	41,0	44,5						
	46	44,50	42,5	43,0	46,5		30	25,00	19,0	20,0	31,0
4,0	48	46,50	44,5	45,0	48,5	10,0	32	27,00	21,0	22,0	33,0
	50	48,50	46,5	47,0	50,5		34	29,00	23,0	24,0	35,0
	52	50,50	48,5	49,0	52,5		36	31,00	25,0	26,0	37,0
	55	53,50	51,5	52,0	55,5		38	33,00	27,0	28,0	39,0
	60	58,50	56,5	57,0	60,5		40	35,00	29,0	30,0	41,0
							42	37,00	31,0	32,0	43,0
	16	14,00	11,5	12,0	16,5		65	60,00	54,0	55,0	66,0
	18	16,00	13,5	14,0	18,5		70	65,00	59,0	60,0	71,0
	20	18,00	15,5	16,0	20,5		75	70,00	64,0	65,0	76,0
	65	63,00	60,5	61,0	65,5		80	75,00	69,0	70,0	81,0
	70	68,00	65,5	66,0	70,5		200	195,00	189,0	190,0	201,0
	75	73,00	70,5	71,0	75,5		210	205,00	199,0	200,0	211,0
5,0	80	78,00	75,5	76,0	80,5	12,0	220	215,00	209,0	210,0	221,0
	22	19,50	16,5	17,0	22,5		44	38,00	31,0	32,0	45,0
	24	21,50	18,5	19,0	24,5		46	40,00	33,0	34,0	47,0
	26	23,50	20,5	21,0	26,5		48	42,00	35,0	36,0	49,0
	28	25,50	22,5	23,0	28,5		50	44,00	37,0	38,0	51,0
	85	82,50	79,5	80,0	85,5		52	46,00	39,0	40,0	53,0
	90	87,50	84,5	85,0	90,0		55	49,00	42,0	43,0	56,0
	95	92,50	89,5	90,0	95,5		60	54,00	47,0	48,0	61,0
	100	97,50	94,5	95,0	100,5		85	79,00	72,0	73,0	86,0
	110	107,50	104,5	105,5	110,5		90	84,00	77,0	78,0	91,0
							95	89,00	82,0	83,0	96,0
							100	94,00	87,0	88,0	101,0
	30	27,00	23,0	24,0	31,0		110	104,00	97,0	98,0	111,0
	32	29,00	25,0	26,0	33,0		240	234,00	227,0	228,0	241,0
	34	31,00	27,0	28,0	35,0		250	244,00	237,0	238,0	251,0
	36	33,00	29,0	30,0	37,0		260	254,00	247,0	248,0	261,0
	38	35,00	31,0	32,0	39,0		280	274,00	267,0	268,0	281,0

BẢNG P2.5 : REN HÌNH THANG NHIỀU ĐẦU MỐI THEO SEV 185-75

Đường kính ren danh nghĩa d, mm		Bước p, mm	Số mỗi ren				
			2	3	4	6	8
Dây 1	Dây 2		Bước vít p_z , mm				
25		2	4	6	8	12	16
		5	10	-	20	-	-
		8	16	24	32	-	-
	28	2	4	6	8	12	16
		5	10	-	20	-	40
		8	16	24	32	-	-
32		3	6	9	12	18	24
		6	12	18	24	36	48
		10	20	-	40	-	-
	36	3	6	9	12	18	24
		6	12	18	24	36	48
		10	20	-	40	-	-
40		3	6	9	12	18	24
		6	12	18	24	36	48
		10	20	-	40	-	-
	44	3	6	9	12	18	24
		8	16	24	32	48	64
		12	24	36	48	-	-
50		3	6	9	12	18	24
		8	16	24	32	48	64
		12	24	36	48	72	-
	55	3	6	9	12	18	24
		8	16	24	32	48	64
		12	24	36	48	72	-
	60	3	6	9	12	18	24
		8	16	24	32	48	64
		12	24	36	48	72	96

Chú thích :

1. Ưu tiên sử dụng dây 1.


2. Khi chọn bước ren ưu tiên dùng các giá trị có gạch dưới.

BẢNG P2.6 : REN RĂNG CỬA THEO GOST 1017-62, mm

Bước ren p	Vít và đai ốc		Vít	Đai ốc	Bước ren p	Vít và đai ốc		Vít	Đai ốc
	Đường kính ren					Đường kính ren			
	ngoài d	trung bình d ₂	trong d ₁	trong		ngoài d	trung bình d ₂	trong d ₁	trong
2	20	18,500	16,528	17	8	22*	16,000	8,116	10
	22*	20,500	18,528	19		26	20,000	12,116	14
	26	24,500	22,528	23		28*	22,000	14,116	16
	28*	26,500	24,528	25		44*	38,000	30,116	32
3	32	29,750	26,794	27,5		50	44,000	36,116	38
	36*	33,750	30,794	31,5		55*	49,000	41,116	43
	40*	37,750	34,794	35,5	60	54,000	46,116	48	
	44	41,750	38,794	39,5	10	32	24,500	14,644	17
	50	47,750	44,794	45,5		36*	28,500	18,644	21
	55*	52,750	49,794	50,5		40	32,500	22,644	25
60	57,750	54,794	55,5	70*		62,500	52,644	55	
4	70*	67,000	63,058	64	80	72,500	62,644	65	
	80	77,000	73,058	74	12	44*	35,000	23,174	26
5	26	22,250	17,322	18,5		50	41,000	29,174	32
	28*	24,250	19,322	20,5		55*	46,000	34,174	37
	90*	86,250	81,322	82,5		60	51,000	39,174	42
	100	96,250	91,322	92,5		90*	81,000	69,174	72
6	32	27,500	21,586	23		100	91,000	79,174	82
	36*	31,500	25,586	27	16	70*	58,000	42,232	46
	40	35,500	29,586	31		80	68,000	52,232	56
	120	115,500	109,586	111		120	108,000	92,232	96

*Chú thích : Các trị số có đánh dấu *, thuộc dãy 2 của đường kính ren, nên tránh dùng.*

BẢNG P2.7 . Ổ BỊ ĐỒ MỘT DÂY (THEO GOST 8338-75)

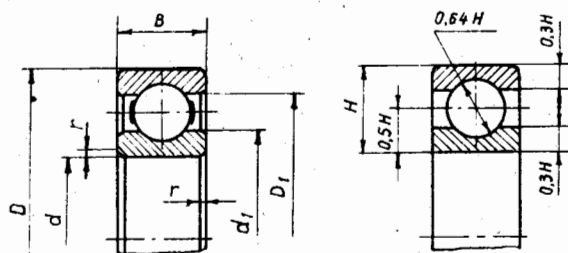

Kí hiệu ổ	d, mm	D, mm	B, mm	r, mm	C, kN	C _o , kN
-----------	-------	-------	-------	-------	-------	---------------------

Cổ siêu nhẹ, vừa

1000099	9	20	6	0,5	2,10	1,07
1000900	10	22	6	0,5	2,62	1,38
1000901	12	24	6	0,5	2,66	1,38
1000902	15	28	7	0,5	2,53	1,51
1000903	17	30	7	0,5	2,85	1,68
1000904	20	37	9	0,5	5,14	3,12
1000905	25	42	9	0,5	5,74	3,75
1000906	30	47	9	0,5	5,95	4,06
1000907	35	55	10	1,0	8,16	5,76
1000908	40	62	12	1,0	9,54	7,06
1000909	45	68	12	1,0	10,30	8,29
1000911	55	80	13	1,5	12,30	10,20
1000912	60	85	13	1,5	12,50	10,80
1000915	75	100	16	1,5	19,10	17,20

Cổ đặc biệt nhẹ, hẹp


700105	25	47	8	0,5	6,57	4,24
700106	30	55	9	0,5	7,56	5,40
700107	35	62	9	0,5	7,74	5,79
700108	40	68	9	0,5	10,30	8,06
700109	45	75	10	0,5	10,50	8,57
700110	50	80	10	1,0	10,80	9,07
700111	55	90	11	1,0	12,90	10,80
700112	60	95	11	1,0	13,20	11,50
700113	65	100	11	1,0	13,50	12,10
700114	70	110	13	1,0	15,80	14,20

Cổ đặc biệt nhẹ, vừa

104	20	42	12	1,0	7,36	4,54
105	25	47	12	1,0	7,90	5,04
106	30	55	13	1,5	10,40	7,02
107	35	62	14	1,5	12,50	8,66
108	40	68	15	1,5	13,20	9,45
109	45	75	16	1,5	16,50	12,40
110	50	80	16	1,5	16,50	13,40
111	55	90	18	2,0	22,20	17,30
112	60	95	18	2,0	24,10	18,50
113	65	100	18	2,0	24,10	20,00
114	70	110	20	2,0	30,30	24,60
115	75	115	20	2,0	30,40	24,60
116	80	125	22	2,0	37,40	31,90

Kí hiệu ổ	d, mm	D, mm	B, mm	r, mm	Đường kính bi, mm	C, kN	C _o , kN
117	85	130	22	2,0	13,49	37,40	31,90
118	90	140	24	2,5	14,29	41,10	35,70
120	100	150	24	2,5	14,29	42,30	42,30
Cỡ nhẹ							
204	20	47	14	1,5	7,94	10,0	6,30
205	25	52	15	1,5	7,94	11,0	7,09
206	30	62	16	1,5	9,52	15,3	10,20
207	35	72	17	2,0	11,11	20,1	13,90
208	40	80	18	2,0	12,7	25,6	18,10
209	45	85	19	2,0	12,7	25,7	18,10
210	50	90	20	2,0	12,7	27,5	20,20
211	55	100	21	2,5	14,29	34,0	25,60
212	60	110	22	2,5	15,88	41,1	31,50
213	65	120	23	2,5	16,67	44,9	34,70
214	70	125	24	2,5	17,46	48,8	38,10
215	75	130	25	2,5	17,46	51,9	41,90
216	80	140	26	3,0	19,05	57,0	45,40
217	85	150	28	3,0	19,84	65,4	54,10
218	90	160	30	3,0	22,23	75,3	61,70
219	95	170	32	3,5	23,81	85,3	70,0
220	100	180	34	3,5	25,4	95,8	80,60
Cỡ trung							
304	20	52	15	2,0	9,52	12,5	7,94
305	25	62	17	2,0	11,51	17,6	11,60
306	30	72	19	2,0	12,30	22,0	15,10
307	35	80	21	2,5	14,29	26,2	17,90
308	40	90	23	2,5	15,08	31,9	21,70
309	45	100	25	2,5	17,46	37,8	26,70
310	50	110	27	3,0	19,05	48,5	36,30
311	55	120	29	3,0	20,64	56,0	42,60
312	60	130	31	3,5	22,23	64,1	49,40
313	65	140	33	3,5	23,81	72,4	56,70
314	70	150	35	3,5	25,4	81,7	64,50
315	75	160	37	3,5	26,99	89,0	72,80
316	80	170	39	3,5	28,58	96,5	71,70
317	85	180	41	4,0	30,16	104,0	91,00
318	90	190	43	4,0	31,75	112,0	101,00
320	100	215	47	4,0	36,51	136,0	133,00
Cỡ nặng							
403	17	62	17	2,0	12,7	17,8	12,10
405	25	80	21	2,5	16,67	29,2	20,80
406	30	90	23	2,5	19,05	37,2	27,2
407	35	100	25	2,5	20,67	43,6	31,90
408	40	110	27	3,0	22,23	50,3	37,0
409	45	120	29	3,0	23,02	60,4	53,0
410	50	130	31	3,5	25,4	68,5	53,0
411	55	140	33	3,5	26,99	78,7	63,0
412	60	150	35	3,5	28,58	85,6	71,4
413	65	160	37	3,5	30,16	92,6	79,6
414	70	180	42	4,0	34,93	113,0	107,0
416	80	200	48	4,0	38,1	128,0	128,0
417	85	210	52	5,0	39,69	136,0	138,0

BẢNG P2.8 : Ổ ĐÚA TRỤ NGẮN ĐỒ (THEO GOST 8328-75)

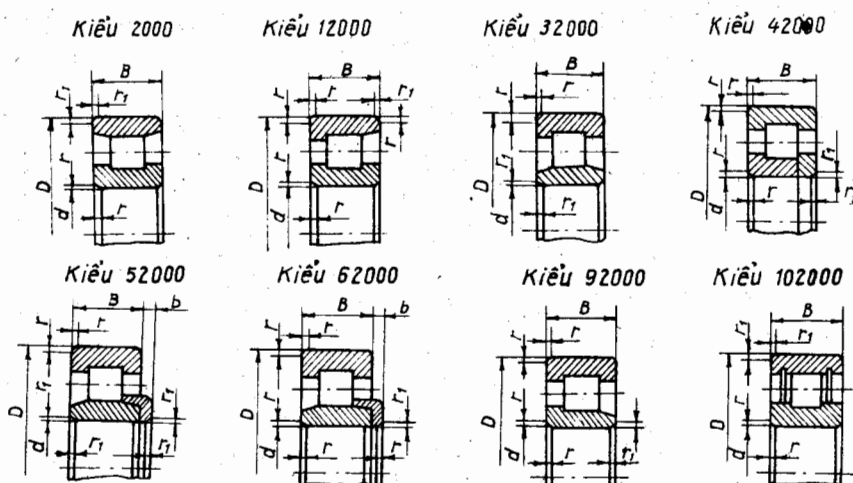

Kí hiệu ổ		d, mm	D, mm	B, mm	r, mm	r ₁ , mm	C, kN	C _o , kN
2100	32100							
Cỡ đặc biệt nhẹ								
2106	32106	30	55	13	1,5	0,8	11,0	7,02
2109	32109	45	76	16	1,5	1,0	19,1	13,40
2110	32110	50	80	16	1,5	1,0	21,5	15,7
2111	32111	55	90	17	2,0	1,5	32,0	24,2
2113	32113	65	100	18	2,0	1,5	34,0	26,9
2114	32114	70	110	20	2,0	1,5	42,1	34,3
2116	32116	80	125	22	2,0	1,5	51,3	42,6
2118	32118	90	140	24	2,5	2,0	61,3	52,3

Kí hiệu ổ		d, mm	D, mm	B, mm	r ₁ , mm	r ₂ , mm	Đường kính chiều dài con lăn, mm	C, kN	C ₀ , kN
2200, (12200) (32200, 42200, 92200)	102200								
Cỡ nhẹ									
2204	102204	20	47	14	1,5	1,0	6,5	11,9	7,38
2205	102205	25	52	15	1,5	1,0	6,5	13,4	8,61
2206	102206	30	62	16	1,5	1,0	7,5	17,3	11,40
2207	102207	35	72	17	2,0	1,0	9	26,5	17,5
2208	102208	40	80	18	2,0	2,0	10	33,7	24,0
2209	102209	45	85	19	2,0	2,0	10	35,3	25,7
2210	102210	50	90	20	2,0	2,0	10	38,7	29,2
2211	102211	55	100	21	2,5	2,0	11	43,7	32,9
2212	102212	60	110	22	2,5	2,5	12	54,8	42,8
2213	102213	65	120	23	2,5	2,5	13	62,1	48,6
2214	102214	70	125	24	2,5	2,5	13	61,8	48,6
2215	102215	75	130	25	2,5	2,5	14	75,4	61,0
2216	102216	80	140	26	3,0	3,0	15	79,5	63,4
2217	-	85	150	28	3,0	3,0	16	99,0	82,4
2218	-	90	160	30	3,0	3,0	18	121,0	101,0
2220	-	100	180	34	3,5	3,5	20	135,0	111,0

Kí hiệu ổ		d, mm	D, mm	B, mm	Con lăn		r = r ₁ , mm	C, kN	C ₀ , kN
2300, 12300, 32300, 42300, 62300, 92300	102300				Đường kính	Chiều dài			

Cỡ trung hẹp

2305	102305	25	62	17	9	9	2,0	22,6	14,3
2306	102306	30	72	19	10	10	2,0	30,2	20,6
2307	102307	35	80	21	11	11	2,5	34,1	23,2
2308	102308	40	90	23	12	12	2,5	41,0	28,5
2309	102309	45	100	25	14	14	2,5	56,5	40,7
2310	102310	50	110	27	15	15	3,0	65,2	47,5
2311	102311	55	120	29	17	17	3,0	84,0	62,8
2312	102312	60	130	31	18	18	3,5	100,0	77,2
2313	102313	65	140	33	19	19	3,5	105,0	80,4
2314	102314	70	150	35	20	20	3,5	123,0	97,3
2315	102315	75	160	37	22	22	3,5	142,0	112,0
2316	102316	80	170	39	22	22	3,5	150,0	121,0
2317	102317	85	180	41	24	24	4,0	179,0	146,0
2318	102318	90	190	43	25	25	4,0	194,0	160,0
2320	-	100	215	47	28	28	4,0	243,0	205,0
2322	-	110	240	50	-	-	4,0	307,0	262,0

Kí hiệu ổ		d, mm	D, mm	B, mm	Con lăn		r = r ₁ , mm	C, kN	C ₀ , kN
2600, 12600, 32600, 42600, 92600	52600 62600				Đường kính	Chiều dài			

Cỡ trung rộng


2605	-	25	62	24	9	14	2,0	37,4	28,3
2606	-	30	72	27	10	14	2,0	41,6	31,2
2607	-	35	80	31	11	15	2,5	46,7	34,8
2608	-	40	90	33	12	18	2,5	61,0	47,5
2609	-	45	100	36	14	20	2,5	79,3	62,8
2610	52610	50	110	40	15	25	3,0	104,0	87,1
2611	52611	55	120	43	17	24	3,0	115,0	94,2
2612	52612	60	130	46	18	26	3,5	140,0	118,1
2613	52613	65	140	48	19	28	3,5	152,0	129,0
2614	52614	70	150	51	20	30	3,5	181,0	159,0
2615	52615	75	160	55	22	34	3,5	212,0	187,0
2616	52616	80	170	58	23	34	3,5	224,0	202,0
2617	52617	85	180	60	24	36	4,0	259,0	235,0
2618	52618	90	190	64	25	36	4,0	270,0	245,0
2620	52620	100	215	73	28	44	4,0	363,0	343,0

Kí hiệu ổ		d, mm	D, mm	B, mm	Con lăn		r = r ₁ , mm	C, kN	C ₀ , kN
2400, 32400, 42400, 62400, 92400	102400				Đường kính	Chiều dài			

Cỡ nặng

2408	102408	40	110	27	17	17	3	78,0	57,6
2409	102409	45	120	29	18	18	3	94,0	71,4
2410	102410	50	130	31	20	20	3,5	102,0	76,5
2411	102411	55	140	33	20	20	3,5	110,0	83,0
2412	102412	60	150	35	22	22	3,5	133,0	103,0
2413	102413	65	160	37	23	23	3,5	146,0	114,0
2414	102414	70	180	42	26	26	4	187,0	150,0
2415	102415	75	190	45	28	28	4	216,0	176,0
2416	102416	80	200	48	30	30	4	248,0	204,0
2417	-	85	210	52	32	32	5	271,0	225,0
2418	-	90	225	54	34	34	5	307,0	257,0
2420	-	100	250	58	36	36	5	367,0	315,0

BẢNG P2.9 : Ổ BỊ ĐỒ LÒNG CẦU HAI DÂY (THEO GOST 5720-75)

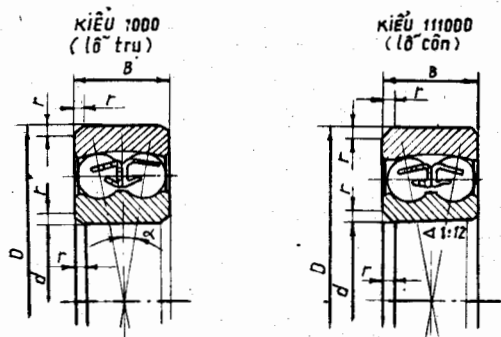

Kí hiệu ổ		d, mm	D, mm	B, mm	r, mm	α (o)	C, kN	C _o , kN
1000	111000							

Cỡ nhẹ

1202	111202	15	35	11	1,0	12,48	5,79	2,05
1203	111203	17	40	12	1,5	11,57	6,13	2,47
1204	111204	20	47	14	1,5	10,32	7,72	3,24
1205	111205	25	52	15	1,5	10,24	9,44	4,10
1206	111206	30	62	16	1,5	9,24	12,20	5,92
1207	111207	35	72	17	2,0	8,72	12,30	6,78
1208	111208	40	80	18	2,0	8,30	15,10	8,72
1209	111209	45	85	19	2,0	8,04	17,00	9,77
1210	111210	50	90	20	2,0	8,12	17,00	11,00
1211	111211	55	100	21	2,5	7,40	21,00	13,60
1212	111212	60	110	22	2,5	7,03	23,80	15,80
1213	111213	65	120	23	2,5	6,46	24,40	17,50
1214	111214	70	125	24	2,5	6,80	27,00	19,10
1215	111215	75	130	25	2,5	6,65	30,50	21,80
1216	111216	80	140	26	3,0	6,08	31,40	24,00
1217	111217	85	150	28	3,0	6,50	38,70	29,00
1218	111218	90	160	30	3,0	6,39	44,70	32,40
1220	111220	100	180	34	3,5	6,58	54,40	41,20

Cỡ nhẹ rộng

1506	111506	30	62	20	1,5	14,71	11,90	5,81
1507	111507	35	72	23	2,0	13,93	16,90	8,38
1508	111508	40	80	23	2,0	12,48	17,50	9,64
1509	115509	45	85	23	2,0	11,53	18,20	10,90
1510	111510	50	90	23	2,0	10,79	18,20	11,50

Kí hiệu ổ		d, mm	D, mm	B, mm	r, mm	α (o)	C, kN	C _o , kN
1000	111000							

1515	111515	75	130	31	2,5	8,94	39,00	24,50
1516	111516	80	140	33	3,0	9,53	38,30	27,40
1517	111517	85	150	36	3,0	9,61	45,70	32,10


Cỡ trung

1304	111304	20	52	15	2,0	10,98	9,76	4,09
1305	111305	25	62	17	2,0	10,59	14,10	6,12
1306	111306	30	72	19	2,0	9,68	16,80	7,90
1307	111307	35	80	21	2,5	9,27	20,00	10,00
1308	111308	40	90	23	2,5	9,12	23,30	12,40
1309	111309	45	100	25	2,5	9,38	30,10	16,20
1310	111310	50	110	27	3,0	8,90	34,10	17,80
1311	111311	55	120	29	3,0	8,87	40,60	22,90
1312	111312	60	130	31	3,5	8,53	45,80	27,10
1313	111313	65	140	33	3,5	8,57	49,20	29,90
1314	111314	70	150	35	3,5	8,49	58,60	35,90
1315	111315	75	160	37	3,5	8,42	62,40	39,10
1316	111316	80	170	39	3,5	8,20	69,90	43,00
1317	111317	85	180	41	4,0	8,24	77,20	49,50
1318	111318	90	190	43	4,0	8,48	91,80	57,20
1320	111320	100	215	47	4,0	8,93	113,00	73,40

Cỡ trung rộng

1605	111605	25	62	24	2,0	17,43	18,90	7,60
1606	111606	30	72	27	2,0	16,35	14,40	10,20
1607	111607	35	80	31	2,5	17,11	30,50	13,00
1608	111608	40	90	33	2,5	16,10	34,90	16,00
1609	111609	45	100	36	2,5	15,57	42,30	19,80
1610	111610	50	110	40	3,0	15,82	50,00	23,90
1611	111611	55	120	43	3,0	15,36	58,60	28,60
1612	111612	60	130	46	3,5	15,10	67,70	33,60
1613	111613	65	140	48	3,5	14,32	75,30	39,30
1614	111614	70	150	51	3,5	14,07	85,70	45,40
1616	111616	80	170	58	3,5	14,00	107,00	58,80

BẢNG P2.10 : Ổ ĐÚA ĐỒ LÒNG CẦU HAI DÂY (THEO GOST 5721-75)

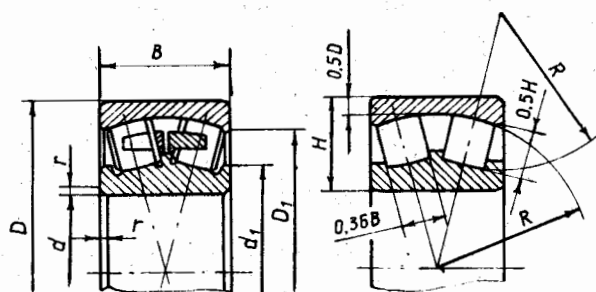

Kí hiệu ổ		d, mm	D, mm	B, mm	r, mm	C, kN	C ₀ , kN
3000	113000						


Cỡ nhẹ

3508	113508	40	80	23	2,0	25,40	33,9
3509	113509	45	85	23	2,0	26,50	35,7
3514	113514	70	125	31	2,5	68,10	95,6
3516	113516	80	140	33	3,0	102,00	120,0
3518	113518	90	160	40	3,0	130,00	162,0
3520	113520	100	180	46	3,5	184,00	216,0
3522	113522	110	200	53	3,5	227,00	281,0
3524	113524	120	215	58	3,5	281,00	231,0

Cỡ trung bình

3608	113608	40	90	33	2,5	64,9	66,2
3609	113609	45	100	36	2,5	80,0	76,2
3610	113610	50	110	40	3,0	98,4	103,0
3611	113611	55	120	43	3,0	113,0	120,0
3612	113612	60	130	46	3,5	130,0	130,0
3613	113613	65	140	48	3,5	140,0	145,0
3614	113614	70	150	51	3,5	178,0	184,0
3615	113615	75	160	55	3,5	200,0	211,0
3616	113616	80	170	58	3,5	227,0	231,0
3617	113617	85	180	60	4,0	249,0	274,0
3618	113618	90	190	64	4,0	270,0	307,0
3620	113620	100	215	73	4,0	363,0	417,0
3622	113622	110	240	80	4,0	459,0	479,0

BẢNG P2.11 : Ổ DỨA CÔN (THEO GOST 333-71)

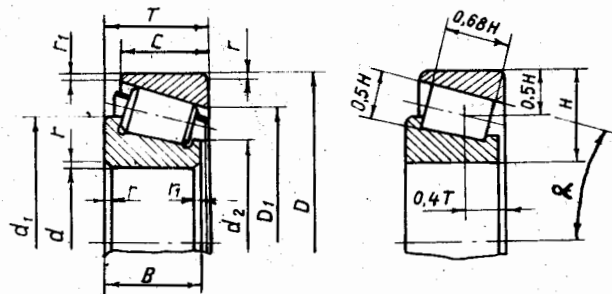

Kí hiệu	d, mm	D, mm	D ₁ , mm	d ₁ , mm	B, mm	C ₁ , mm	T, mm	r, mm	r ₁ , mm	α (°)	C, kN	C ₀ , kN
1	2	3	4	5	6	7	8	9	10	11	12	13

Cỡ đặc biệt nhẹ

2007106	30	55	45,4	42,2	16	14	17	1,5	0,5	9,08	23,50	19,90
2007107	35	62	51	49	17	15	18	1,5	0,5	10,25	25,60	23,00
2007108	40	68	-	-	18	16	19	1,5	0,5	-	31,90	28,40
2007109	45	75	64	59,5	19	16	20	1,5	0,5	11,33	40,00	34,80
2007111	55	90	76	72	22	19	23	2,0	0,8	12,50	49,10	45,20
2007113	65	100	85	83,5	22	19	23	2,0	0,8	14,08	52,90	51,30
2007114	70	110	-	-	24	20	25	2,0	0,8	-	67,60	65,80
2007115	75	115	-	-	26	20	25	2,0	0,8	-	120,00	108,80
2007116	80	125	107,3	102	27	23	29	2,0	0,8	12,75	88,40	88,50
2007118	90	140	121	114,6	30	26	32	2,5	1,0	12,83	111,00	111,00
2007119	95	145	-	-	-	-	-	2,5	1,0	-	114,00	115,00
2007120	100	150	129,8	124,7	-	-	-	2,5	1,0	12,83	117,00	120,00
2007122	110	170	-	-	36	31	38	3,0	1,0	-	161,00	166,00

Cỡ nhẹ

7202	15	35	26	25,8	11	9	11,75	1,0	0,3	10,75	8,78	6,14
7203	17	40	31,5	27,8	12	11	13,25	1,5	0,5	11,83	13,80	9,30
7204	20	47	37	32,5	14	12	15,25	1,5	0,5	13,50	19,10	13,30
7205	25	52	41,4	38	15	13	16,25	1,5	0,5	13,50	23,90	17,90
7206	30	62	50,6	45,6	16	14	17,25	1,5	0,5	13,67	29,80	22,30
7207	35	72	59	52,7	17	15	18,25	2,0	0,8	13,83	35,20	26,30
7208	40	80	66,2	59,3	18	16	19,75	2,0	0,8	14,33	42,40	32,70
7209	45	85	70	64,8	19	16	20,75	2,0	0,8	15,33	42,70	33,40
7210	50	90	77	68,4	20	17	21,75	2,0	0,8	14,00	52,90	40,60
7211	55	100	83,6	76,4	21	18	22,75	2,5	0,8	15,33	57,90	46,10
7212	60	110	94	83	22	19	23,75	2,5	0,8	13,17	72,20	58,40
7214	70	125	107	96	24	21	26,25	2,5	0,8	13,83	95,90	82,10
7215	75	130	111,5	101,5	25	22	27,25	2,5	0,8	14,50	97,60	84,50
7216	80	140	119,5	111	26	22	28,25	3,0	1,0	15,67	106,00	95,20
7217	85	150	127	115	28	24	30,25	3,0	1,0	16,17	109,00	91,40
7218	90	160	136	122,5	30	26	32,5	3,0	1,0	14,33	141,00	125,00
7219	95	170	146	132	32	27	34,5	3,5	1,2	14,33	145,00	131,00
7220	100	180	151	139	34	29	37	3,5	1,2	15,00	162,00	146,00
7224	120	215	-	-	40	34	43,5	3,5	1,2	-	252,00	237,00

1	2	3	4	5	6	7	8	9	10	11	12	13
---	---	---	---	---	---	---	---	---	----	----	----	----

Cỡ nhẹ rộng

7506	30	62	50	45,6	20	17	21,25	1,5	0,5	13,67	34,90	27,50
7507	35	72	58	52,5	23	20	24,25	2,0	0,8	13,00	50,20	40,30
7508	40	80	64	58,5	23	19	24,75	2,0	0,8	14,25	53,90	44,80
7509	45	85	69	65,4	23	19	24,75	2,0	0,8	15,50	51,60	42,60
7510	50	90	73	71	23	19	24,75	2,0	0,8	15,67	59,80	54,50
7511	55	100	83	75,4	25	21	26,75	2,5	0,8	13,50	72,20	61,60
7512	60	110	90	85	28	24	29,75	2,5	0,8	14,67	84,0	75,60
7513	65	120	99	91,5	31	27	32,75	2,5	0,8	13,83	109,0	98,90
7514	70	125	103	97	32	27	33,25	2,5	0,8	14,50	110,0	101,0
7515	75	130	108	102	31	27	33,25	2,5	0,8	15,17	115,0	108,0
7516	80	140	117	109,5	33	28	35,25	3,0	1,0	15,00	133,0	126,0
7517	85	150	123	116,7	36	30	38,5	3,0	1,0	15,00	151,0	141,0
7518	90	160	132	124	40	34	42,5	3,0	1,0	14,50	179,0	171,0
7519	95	170	141	132	43	37	45,5	3,5	1,4	14,33	225,0	225,0
7520	100	180	146	140	46	39	49	3,5	1,4	15,00	232,0	236,0
7522	110	200	-	-	53	46	56	3,5	1,4	-	291,0	296,0
7524	120	215	-	-	58	50	61,5	3,5	1,4	-	351,0	379,0


Cỡ trung

7304	20	52	42	35,4	15	13	16,25	2,0	0,8	11,17	25,0	16,6
7305	25	62	50,5	43,5	17	15	18,25	2,0	0,8	13,50	29,6	20,9
7306	30	72	58	50,6	19	17	20,75	2,0	0,8	13,50	40,0	29,9
7307	35	80	65,5	56,3	21	18	22,75	2,5	0,8	12,00	48,1	35,3
7308	40	90	74,5	62,5	23	20	25,25	2,5	0,8	10,50	61,0	46,0
7309	45	100	83,5	70,5	25	22	27,25	2,5	0,8	10,83	76,1	59,3
7310	50	110	92	76,5	27	23	29,25	3,0	1,0	11,67	96,6	75,9
7311	55	120	97,5	84	29	25	31,5	3,0	1,0	12,50	102,0	81,5
7312	60	130	108,5	94	31	27	33,5	3,5	1,2	11,50	118,0	96,3
7313	65	140	116,5	101	33	28	36	3,5	1,2	11,50	134,0	111,0
7314	70	150	126	104,5	35	30	38	3,5	1,2	11,67	168,0	137,0
7315	75	160	133	112,5	37	31	40	3,5	1,2	12,33	178,0	148,0
7317	85	180	150	130	41	35	44,5	4,0	1,5	11,83	221,0	195,0
7318	90	190	158	137	43	36	46,5	4,0	1,5	12,00	240,0	201,0

Cỡ trung rộng

7604	20	52	40,5	35,8	21	18,5	22,25	2,0	0,8	11,25	29,5	22,0
7605	25	62	48,5	42	24	21	25,25	2,0	0,8	11,33	45,5	36,6
7606	30	72	55,5	50	27	23	28,75	2,0	0,8	12,00	61,3	51,0
7607	35	80	61,5	56,5	33	27	32,75	2,5	0,8	11,17	71,6	61,5
7608	40	90	70,5	64	33	28,5	35,25	2,5	0,8	11,17	80,0	67,2
7609	45	100	78,5	70,3	36	31	38,25	2,5	0,8	11,00	104,0	90,5
7610	50	110	86,5	78	40	34	42,25	3,0	1,0	11,17	122,0	108,0
7611	55	120	93	87	43	35	45,5	3,0	1,0	12,17	148,0	140,0
7612	60	130	103	93,5	46	37	48,5	3,5	1,2	11,50	171,0	157,0
7613	65	140	110	102	48	41	51	3,5	1,2	12,33	178,0	168,0
7614	70	150	119	107	51	43	54	3,5	1,2	13,17	204,0	186,0
7615	75	160	127	113	55	46,5	58	3,5	1,2	11,33	249,0	235,0
7616	80	170	137	131	58	48	61,5	3,5	1,2	11,83	294,0	291,0
7618	90	190	153	136	64	53	67,5	4,0	1,5	12,50	369,0	363,0
7620	100	215	172	156	73	61,5	77,5	4,0	1,5	11,33	451,0	459,0
7622	110	240	-	-	80	66	84,5	4,0	1,5	11,83	490,0	505,0
7624	120	260	-	-	86	70,5	90,5	4,0	1,5	11,83	601,0	610,0

BẢNG P2.12 : Ổ BỊ ĐỒ - CHẶN (THEO GOST 831 - 75)

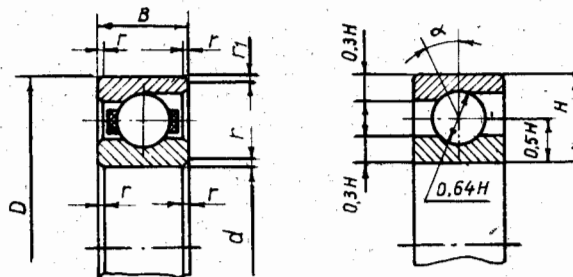

Kí hiệu ổ	d, mm	D, mm	b = T, mm	r, mm	r ₁ , mm	C, kN	C ₀ , kN
-----------	----------	----------	--------------	----------	------------------------	----------	------------------------

Cỡ đặc biệt nhẹ

36103	17	35	10	0,5	0,3	5,71	3,58
36104	20	42	12	1,0	0,3	8,30	5,42

Cỡ nhẹ hẹp

36203	17	40	11	1,0	0,5	9,43	6,24
36204	20	47	14	1,5	0,5	12,3	8,47
36205	25	52	15	1,5	0,5	13,1	9,24
36206	30	62	16	1,5	0,5	18,2	13,3
36207	35	72	17	2,0	1,0	24,0	18,1
36208	40	80	18	2,0	1,0	30,6	23,7
36209	45	85	19	2,0	1,0	32,3	25,0
36210	50	90	20	2,0	1,0	33,9	27,6
36211	55	100	21	2,5	1,2	39,4	34,9
36212	60	110	22	2,5	1,2	48,2	40,1
36214	70	125	24	2,5	1,2	63,0	55,9
36216	80	140	26	3,0	1,5	73,5	66,6
36217	85	150	28	3,0	1,5	79,0	72,2
36218	90	160	30	3,0	1,5	92,8	84,6
36220	100	180	34	3,5	2,0	124,0	118,0

Cỡ đặc biệt nhẹ

46106	30	55	13	1,5	0,5	11,2	8,03
46108	40	68	15	1,5	0,5	14,6	11,30
46109	45	75	16	1,5	0,5	17,3	13,7
46111	55	90	18	2,0	1,0	25,2	21,5
46112	60	95	18	2,0	1,0	28,8	25,0
46114	70	110	20	2,0	1,0	35,6	32,3
46115	75	115	20	2,0	1,0	35,3	32,3
46116	80	125	22	2,0	1,0	42,3	40,9
46117	85	130	22	2,0	1,0	44,3	43,0
46118	90	140	24	2,5	1,2	47,4	45,9
46120	100	150	24	2,5	1,2	50,2	48,5
46122	110	170	28	3,0	1,5	74,5	74,9
46124	120	180	28	3,0	1,5	78,3	82,3

Kí hiệu ổ	d, mm	D, mm	b = T, mm	r, mm	r _p , mm	C, kN	C _o , kN
-----------	----------	----------	--------------	----------	------------------------	----------	------------------------

Cỡ nhẹ hẹp

46204	20	47	14	1,5	0,5	11,6	7,79
46205	25	52	15	1,5	0,5	12,4	8,50
46206	30	62	16	1,5	0,5	17,2	12,20
46207	35	72	17	2,0	1,0	22,7	16,6
46208	40	80	18	2,0	1,0	28,9	27,1
46209	45	85	19	2,0	1,0	30,4	23,6
46210	50	90	20	2,0	1,0	31,8	25,4
46211	55	100	21	2,5	1,2	34,9	32,1
46212	60	110	22	2,5	1,2	45,4	36,8
46213	65	120	23	2,5	1,2	54,4	46,8
46214	70	125	24	2,5	1,2	59,1	51,4
46215	75	130	25	2,5	1,2	61,5	54,8
46216	80	140	26	3,0	1,5	68,9	61,2
46217	85	150	28	3,0	1,5	74,0	66,4
46218	90	160	30	3,0	1,5	81,7	77,7
46220	100	180	34	3,5	2,0	116,0	109,0


Cỡ trung hẹp

46304	20	52	15	2,0	1,0	14,0	9,17
46305	25	62	17	2,0	1,0	21,10	14,90
46306	30	72	19	2,0	1,0	25,60	18,17
46307	35	80	21	2,5	1,2	33,40	25,20
46308	40	90	23	2,5	1,2	39,20	30,70
46309	45	100	25	2,5	1,2	48,10	37,70
46310	50	110	27	3,0	1,5	56,03	44,80
46312	60	130	31	3,0	1,5	78,80	66,60
46313	65	140	33	3,5	2,0	89,00	76,40
46314	70	150	35	3,5	2,0	93,30	78,30
46318	90	190	43	4,0	2,0	129,00	125,00
46320	100	215	47	4,0	2,0	167,00	180,00
46330	150	320	65	5,0	2,5	280,00	377,00

Cỡ nặng hẹp

66407	35	100	25	2,5	1,2	45,4	33,7
66408	40	110	27	2,5	1,2	52,7	38,8
66409	45	120	29	3,0	1,5	64,0	48,2
66410	50	130	31	3,0	2,0	77,6	61,2
66412	60	150	35	3,5	2,0	98,0	81,0
66414	70	180	42	4,0	2,0	119,0	111,0
66418	90	225	54	5,0	2,5	163,0	172,0

BẢNG P2.13 : Ổ BỊ CHẶN MỘT DÂY (THEO GOST 8674 - 75)

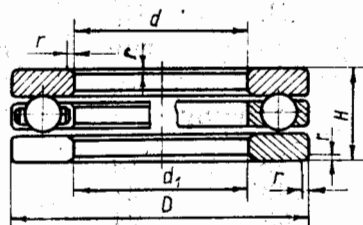

Kí hiệu ổ	d, mm	d ₁ , mm	D, mm	H, mm	r, mm	C, kN	C _o , kN
-----------	----------	------------------------	----------	----------	----------	----------	------------------------

Cỡ đặc biệt nhẹ

8104	20	20,2	35	10	0,5	11,0	21,6
8105	25	25,2	42	11	1,0	12,5	26,2
8106	30	30,2	47	11	1,0	13,8	29,3
8107	35	35,2	52	12	1,0	16,8	37,2
8108	40	40,2	60	13	1,0	23,0	51,0
8109	45	45,2	65	14	1,0	24,3	56,1
8110	50	50,2	70	14	1,0	25,7	61,2
8111	55	55,2	78	16	1,0	34,2	83,0
8112	60	60,0	85	17	1,5	37,5	91,5
8113	65	65,2	90	18	1,5	42,8	104,0
8114	70	70,2	95	18	1,5	46,0	113,0
8115	75	75,2	100	19	1,5	47,4	118,0
8116	80	80,2	105	19	1,5	48,7	122,0
8117	85	85,2	110	19	1,5	50,0	132,0
8118	90	90,2	120	22	1,5	61,8	161,0
8120	100	100,2	135	25	1,5	81,6	218,0
8122	110	110,2	145	25	1,5	82,9	220,0
8124	120	120,2	155	25	1,5	88,0	250,0

Cỡ nhẹ


8201	12	12,2	28	11	1,0	8,68	15,4
8202	15	15,2	32	12	1,0	9,87	18,6
8204	20	20,2	40	14	1,0	15,8	30,6
8205	25	25,2	47	15	1,0	20,4	41,0
8206	30	30,2	52	16	1,0	23,0	47,2
8207	35	35,2	62	18	1,5	31,6	68,0
8208	40	40,2	68	19	1,5	37,5	79,9
8209	45	45,2	73	20	1,5	39,5	90,5
8210	50	50,2	78	22	1,5	46,0	105,0
8211	55	55,2	90	25	1,5	56,6	129,0
8212	60	60,2	95	26	1,5	65,8	155,0
8213	65	65,2	100	27	1,5	65,8	153,0
8214	70	70,2	105	27	1,5	65,8	161,0
8215	75	75,2	110	27	1,5	68,4	169,0
8216	80	80,2	115	28	1,5	76,3	191,0
8217	85	85,2	125	31	1,5	94,7	239,0
8218	90	90,2	135	35	2,0	112,0	290,0
8220	100	100,2	150	38	2,0	132,0	335,0
8222	110	110,2	160	38	2,0	138,0	394,0

Kí hiệu ổ	d, mm	d ₁ , mm	D, mm	H, mm	r, mm	C, kN	C _o , kN
-----------	----------	------------------------	----------	----------	----------	----------	------------------------

Cổ trung

8305	25	25,2	52	18	1,5	25,7	49,9
8306	30	30,2	60	21	1,5	32,9	67,9
8307	35	35,2	68	24	1,5	40,8	85,0
8308	40	40,2	78	26	1,5	51,3	109,0
8309	45	45,2	85	28	1,5	59,2	133,0
8310	50	50,2	95	31	2,0	71,0	164,0
8311	55	55,2	105	35	2,0	92,1	217,0
8312	60	60,2	110	35	2,0	92,1	217,0
8313	65	65,2	115	36	2,0	104,0	254,0
8314	70	70,2	125	40	2,0	120,0	298,0
8315	75	75,2	135	44	2,5	138,0	346,0
8316	80	80,2	140	44	2,5	138,0	346,0
8318	90	90,2	155	50	2,5	171,0	452,0
8320	100	100,1	170	55	2,5	184,0	490,0
8322	110	110,2	190	63	3,0	230,0	655,0

BẢNG P2.14 : Ổ BI CHẶN HAI DÂY (THEO GOST 7872 - 75)



Kí hiệu ổ	d, mm	d ₁ , mm	d ₂ , mm	D, mm	H ₂ , mm	a, mm	r, mm	C, kN	C _o , kN
38205	25	25,2	20	47	28	7	1,0	20,4	41,0
38206	30	30,2	25	52	29	7	1,0	23,0	47,2
38207	35	35,2	30	62	34	8	1,5	31,6	68,0
38208	40	40,2	30	68	36	9	1,5	-	-
38209	45	45,2	35	73	37	9	1,5	39,5	90,5
38210	50	50,2	40	78	39	9	1,5	-	-
38212	60	60,2	50	95	46	10	1,5	65,8	155,0
38214	70	70,2	55	105	47	10	1,5	-	-
38216	80	80,2	65	116	48	10	1,5	-	-
38217	85	85,2	70	125	55	12	-	94,7	239,0

BẢNG P2.15 : TUỔI THỌ CỦA Ổ BÌ

L_h	C/Q khi số vòng quay n, v/ph													
	10	16	25	40	63	100	125	160	200	250	320	400	500	630
100	-	-	-	-	-	-	-	-	1,06	1,15	1,24	1,34	1,45	1,56
500	-	-	-	1,06	1,24	1,45	1,56	1,68	1,82	1,96	2,12	2,29	2,47	2,67
1000	-	-	1,15	1,34	1,56	1,82	1,96	2,12	2,29	2,47	2,67	2,88	3,11	3,36
1250	-	1,06	1,24	1,45	1,68	1,96	2,12	2,29	2,47	2,67	2,88	3,11	3,36	3,63
1600	-	1,15	1,34	1,56	1,82	2,12	2,29	2,47	2,67	2,88	3,11	3,36	3,63	3,91
2000	1,06	1,24	1,45	1,68	1,96	2,29	2,47	2,67	2,88	3,11	3,36	3,63	3,91	4,21
2500	1,15	1,34	1,56	1,82	2,12	2,47	2,67	2,88	3,11	3,36	3,63	3,91	4,23	4,56
3200	1,24	1,45	1,68	1,96	2,29	2,67	2,88	3,11	3,36	3,63	3,91	4,23	4,56	4,93
4000	1,34	1,56	1,82	2,12	2,47	2,88	3,11	3,36	3,63	3,91	4,23	4,56	4,93	5,32
5000	1,45	1,68	1,96	2,29	2,67	3,11	3,36	3,63	3,91	4,23	4,56	4,93	5,32	5,75
6300	1,56	1,82	2,12	2,47	2,88	3,36	3,63	3,91	4,23	4,56	4,93	5,32	5,75	6,20
8000	1,68	1,96	2,29	2,67	3,11	3,63	3,91	4,23	4,56	4,93	5,32	5,75	6,20	6,70
10000	1,82	2,12	2,47	2,88	3,36	3,91	4,23	4,56	4,93	5,32	5,75	6,20	6,70	7,23
12500	1,96	2,29	2,67	3,11	3,63	4,23	4,56	4,93	5,32	5,75	6,20	6,70	7,23	7,81
16000	2,12	2,47	2,88	3,36	3,91	4,56	4,93	5,32	5,75	6,20	6,70	7,23	7,81	8,41
20000	2,29	2,67	3,11	3,63	4,23	4,93	5,32	5,75	6,20	6,70	7,23	7,81	8,43	9,11
25000	2,47	2,88	3,36	3,91	4,56	5,32	5,75	6,20	6,70	7,23	7,81	8,43	9,11	9,83
32000	2,67	3,11	3,63	4,23	4,93	5,75	6,20	6,70	7,23	7,81	8,43	9,11	9,83	10,6
40000	2,88	3,36	3,91	4,56	5,32	6,20	6,70	7,23	7,81	8,43	9,11	9,83	10,6	11,5
50000	3,11	3,63	4,23	4,93	5,75	6,70	7,23	7,81	8,43	9,11	9,83	10,6	11,5	12,4
63000	3,36	3,91	4,56	5,32	6,20	7,23	7,81	8,43	9,11	9,83	10,6	11,5	12,4	13,4
80000	3,63	4,23	4,93	5,75	6,70	7,81	8,43	9,11	9,83	10,6	11,5	12,4	13,4	14,5
100000	3,91	4,56	5,32	6,20	7,23	8,43	9,11	9,83	10,6	11,5	12,4	13,4	14,5	15,6
200000	4,93	5,75	6,70	7,81	9,11	10,6	11,5	12,4	13,4	14,5	15,6	16,8	18,2	19,6

L_h	C/Q khi số vòng quay n, v/ph													
	800	1000	1250	1600	2000	2500	3200	4000	5000	6300	8000	10000	12500	16000
100	1,68	1,82	1,96	2,12	2,29	2,47	2,67	2,88	3,11	3,36	3,63	3,91	4,23	4,56
500	2,88	3,11	3,36	3,63	3,91	4,23	4,56	4,93	5,32	5,75	6,20	6,70	7,23	7,81
1000	3,63	3,91	4,23	4,56	4,93	5,32	5,75	6,20	6,70	7,23	7,81	8,43	9,11	9,83
1250	3,91	4,23	4,56	4,93	5,32	5,75	6,20	6,70	7,23	7,81	8,43	9,11	9,83	10,6
1600	4,23	4,56	4,93	5,32	5,75	6,20	6,70	7,23	7,81	8,43	9,11	9,83	10,6	11,5
2000	4,56	4,93	5,32	5,75	6,20	6,70	7,23	7,81	8,43	9,11	9,83	10,6	11,5	12,4
2500	4,93	5,32	5,75	6,20	6,70	7,23	7,81	8,43	9,11	9,83	10,6	11,5	12,4	13,4
3200	5,32	5,75	6,20	6,70	7,23	7,81	8,43	9,11	9,83	10,6	11,5	12,4	13,4	14,5
4000	5,75	6,20	6,70	7,23	7,81	8,43	9,11	9,83	10,6	11,5	12,4	13,4	14,5	15,6
5000	6,20	6,70	7,23	7,81	8,43	9,11	9,83	10,6	11,5	12,4	13,4	14,5	15,6	16,8
6300	6,70	7,23	7,81	8,43	9,11	9,83	10,6	11,5	12,5	13,4	14,5	15,6	16,8	18,2
8000	7,23	7,81	8,43	9,11	9,83	10,6	11,6	12,4	13,4	14,5	15,6	16,8	18,2	19,6
10000	7,81	8,43	9,11	9,83	10,6	11,5	12,4	13,4	14,5	15,6	16,8	18,2	19,6	21,2
12500	8,43	9,11	9,83	10,6	11,5	12,4	13,4	14,5	15,6	16,8	18,2	19,6	21,2	22,9
16000	9,11	9,83	10,6	11,5	12,4	13,4	14,5	15,6	16,8	18,2	19,6	21,2	22,9	24,7
20000	9,83	10,6	11,5	12,4	13,4	14,5	15,6	16,8	18,2	19,6	21,2	22,9	24,7	26,7
25000	10,6	11,5	12,4	13,4	14,5	15,6	16,8	18,2	19,6	21,2	22,0	24,7	26,7	28,8
32000	11,5	12,4	13,4	14,5	15,6	16,8	18,2	19,6	21,1	22,5	24,7	26,7	28,8	31,1
40000	12,4	13,4	14,5	15,6	16,8	18,2	19,6	21,2	22,9	24,7	26,7	28,8	31,1	-
50000	13,4	14,5	15,6	16,8	18,2	19,6	21,2	22,9	24,7	26,7	28,8	31,1	-	-
63000	14,5	15,6	16,8	18,2	19,6	21,2	22,9	24,7	26,7	28,8	31,1	-	-	-
80000	15,6	16,8	18,2	19,6	21,2	22,9	24,7	26,7	28,8	31,1	-	-	-	-
100000	16,8	18,2	19,6	21,2	22,9	24,7	26,7	28,8	31,1	-	-	-	-	-
200000	21,2	22,9	24,7	26,7	28,8	31,1	-	-	-	-	-	-	-	-

BẢNG P2.16 : TUỔI THỌ CỦA Ổ ĐÚA

L_h	C/Q khi số vòng quay n , v/ph													
	10	16	25	40	63	100	125	160	200	250	320	400	500	630
100	-	-	-	-	-	-	-	-	1,05	1,13	1,21	1,30	1,39	1,49
500	-	-	-	1,05	1,21	1,39	1,49	1,60	1,71	1,83	1,97	2,11	2,26	2,42
1000	-	-	1,13	1,30	1,49	1,71	1,83	1,97	2,11	2,26	2,42	2,59	2,78	2,97
1250	-	1,05	1,21	1,39	1,60	1,83	1,97	2,11	2,26	2,42	2,59	2,78	2,97	3,19
1600	-	1,13	1,30	1,49	1,71	1,97	2,11	2,26	2,42	2,59	2,78	2,97	3,19	3,42
2000	1,05	1,21	1,39	1,60	1,83	2,11	2,26	2,42	2,59	2,78	2,97	3,19	3,42	3,66
2500	1,13	1,30	1,49	1,71	1,97	2,26	2,42	2,59	2,78	2,97	3,19	3,42	3,66	3,92
3200	1,21	1,39	1,60	1,83	2,11	2,42	2,59	2,78	2,97	3,19	3,42	3,66	3,92	4,20
4000	1,30	1,49	1,71	1,97	2,26	2,59	2,78	2,97	3,19	3,42	3,66	3,92	4,20	4,50
5000	1,39	1,60	1,83	2,11	2,42	2,78	2,97	3,19	3,42	3,66	3,92	4,20	4,50	4,82
6300	1,49	1,71	1,97	2,26	2,59	2,97	3,19	3,42	3,66	3,92	4,20	4,50	4,82	5,17
8000	1,60	1,83	2,11	2,42	2,78	3,19	3,42	3,66	3,92	4,20	4,50	4,82	5,17	5,54
10000	1,71	1,97	2,26	2,59	2,97	3,42	3,66	3,92	4,20	4,50	4,82	5,17	5,54	5,94
12500	1,83	2,11	2,42	2,78	3,19	3,66	3,92	4,20	4,50	4,82	5,17	5,54	5,94	6,36
16000	1,97	2,26	2,59	2,97	3,42	3,92	4,20	4,50	4,82	5,17	5,54	5,94	6,36	6,81
20000	2,11	2,42	2,78	3,19	3,66	4,20	4,50	4,82	5,17	5,54	5,94	6,36	6,81	7,30
25000	2,26	2,59	2,97	3,42	3,92	4,50	4,82	5,17	5,54	5,94	6,36	6,81	7,30	7,82
32000	2,42	2,78	3,19	3,66	4,20	4,82	5,17	5,54	5,94	6,36	6,81	7,30	7,82	8,38
40000	2,59	2,97	3,42	3,92	4,50	5,17	5,54	5,94	6,36	6,81	7,30	7,82	8,38	8,98
50000	2,78	3,19	3,66	4,20	4,82	5,54	5,94	6,36	6,81	7,30	7,82	8,38	8,98	9,62
63000	2,97	3,42	3,92	4,50	5,17	5,94	6,36	6,81	7,30	7,82	8,38	8,98	9,62	10,3
80000	3,19	3,66	4,20	4,82	5,54	6,36	6,81	7,30	7,82	8,38	8,98	9,62	10,3	11,0
100000	3,42	3,92	4,50	5,17	5,94	6,81	7,30	7,82	8,38	8,98	9,62	10,3	11,0	11,8
200000	4,20	4,82	5,54	6,36	7,30	8,38	8,98	9,62	10,3	11,0	11,8	12,7	13,6	14,6

L_h	C/Q khi số vòng quay n , v/ph													
	800	1000	1250	1600	2000	2500	3200	4000	5000	6300	8000	10000	12500	16000
100	1,60	1,71	1,83	1,97	2,11	2,26	2,42	2,59	2,78	2,97	3,19	3,42	3,66	3,92
500	2,59	2,78	2,97	3,19	3,42	3,66	3,92	4,20	4,50	4,82	5,17	5,54	5,94	6,36
1000	3,19	3,42	3,66	3,92	4,20	4,50	4,82	5,17	5,54	5,94	6,36	6,81	7,30	7,82
1250	3,42	3,66	3,92	4,20	4,50	4,82	5,17	5,54	5,94	6,36	6,81	7,30	7,82	8,38
1600	3,66	3,92	4,20	4,50	4,82	5,17	5,54	5,94	6,36	6,81	7,30	7,82	8,38	8,98
2000	3,92	4,20	4,50	4,82	5,17	5,54	7,94	6,36	6,81	7,30	7,82	8,38	8,98	9,62
2500	4,20	4,50	4,82	5,17	5,54	5,94	6,36	6,81	7,30	7,82	8,38	8,98	9,62	10,3
3200	4,50	4,82	5,17	5,54	5,94	6,36	6,81	7,30	7,82	8,38	8,98	9,62	10,3	11,0
4000	4,82	5,17	5,54	8,94	6,36	6,81	7,30	7,82	8,38	8,98	9,62	10,3	11,0	11,8
5000	5,17	5,54	5,94	6,36	6,81	7,30	7,82	8,38	8,98	9,62	10,3	11,0	11,8	12,7
6300	5,54	5,94	6,36	6,81	7,30	7,82	8,38	8,98	9,62	10,3	11,0	11,8	12,7	13,6
8000	5,94	6,38	6,81	7,30	7,82	8,38	8,98	9,62	10,3	11,0	11,8	12,7	13,6	14,6
10000	6,36	6,81	7,30	7,82	8,38	8,98	9,62	10,3	11,0	11,8	12,7	13,6	14,6	15,6
12500	6,81	7,30	7,82	8,38	8,98	9,62	10,3	11,0	11,8	12,7	13,6	14,6	15,6	16,7
16000	7,30	7,82	8,38	8,98	9,62	10,3	11,0	11,8	12,7	13,6	14,6	15,6	16,7	17,9
20000	7,82	8,38	8,98	9,62	10,3	11,0	11,8	12,7	13,6	14,6	15,6	16,7	17,9	19,2
25000	8,38	8,98	9,62	10,3	11,0	11,8	12,7	13,6	14,6	15,6	16,7	17,9	19,2	20,6
32000	8,98	9,62	10,3	11,0	11,8	12,7	13,6	14,6	15,6	16,7	17,9	19,2	20,6	-
40000	9,62	10,3	11,0	11,8	12,7	13,6	14,6	15,6	16,7	17,9	19,2	20,6	-	-
50000	10,3	11,0	11,8	12,7	13,6	14,6	15,6	16,7	17,9	19,2	20,6	-	-	-
63000	11,0	11,8	12,7	13,6	14,6	15,6	16,7	17,9	19,2	20,6	-	-	-	-
80000	11,8	12,7	13,6	14,6	15,6	16,7	17,9	19,2	20,6	-	-	-	-	-
100000	12,7	13,6	14,6	15,6	16,7	17,9	19,2	20,6	-	-	-	-	-	-
200000	15,6	16,7	17,9	19,2	20,6	-	-	-	-	-	-	-	-	-