

## 1. Description


### 1.1. Project

Project Name	test
Board Name	custom
Generated with:	STM32CubeMX 5.3.0
Date	12/03/2019

### 1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103ZETx
MCU Package	LQFP144
MCU Pin number	144

## 2. Pinout Configuration

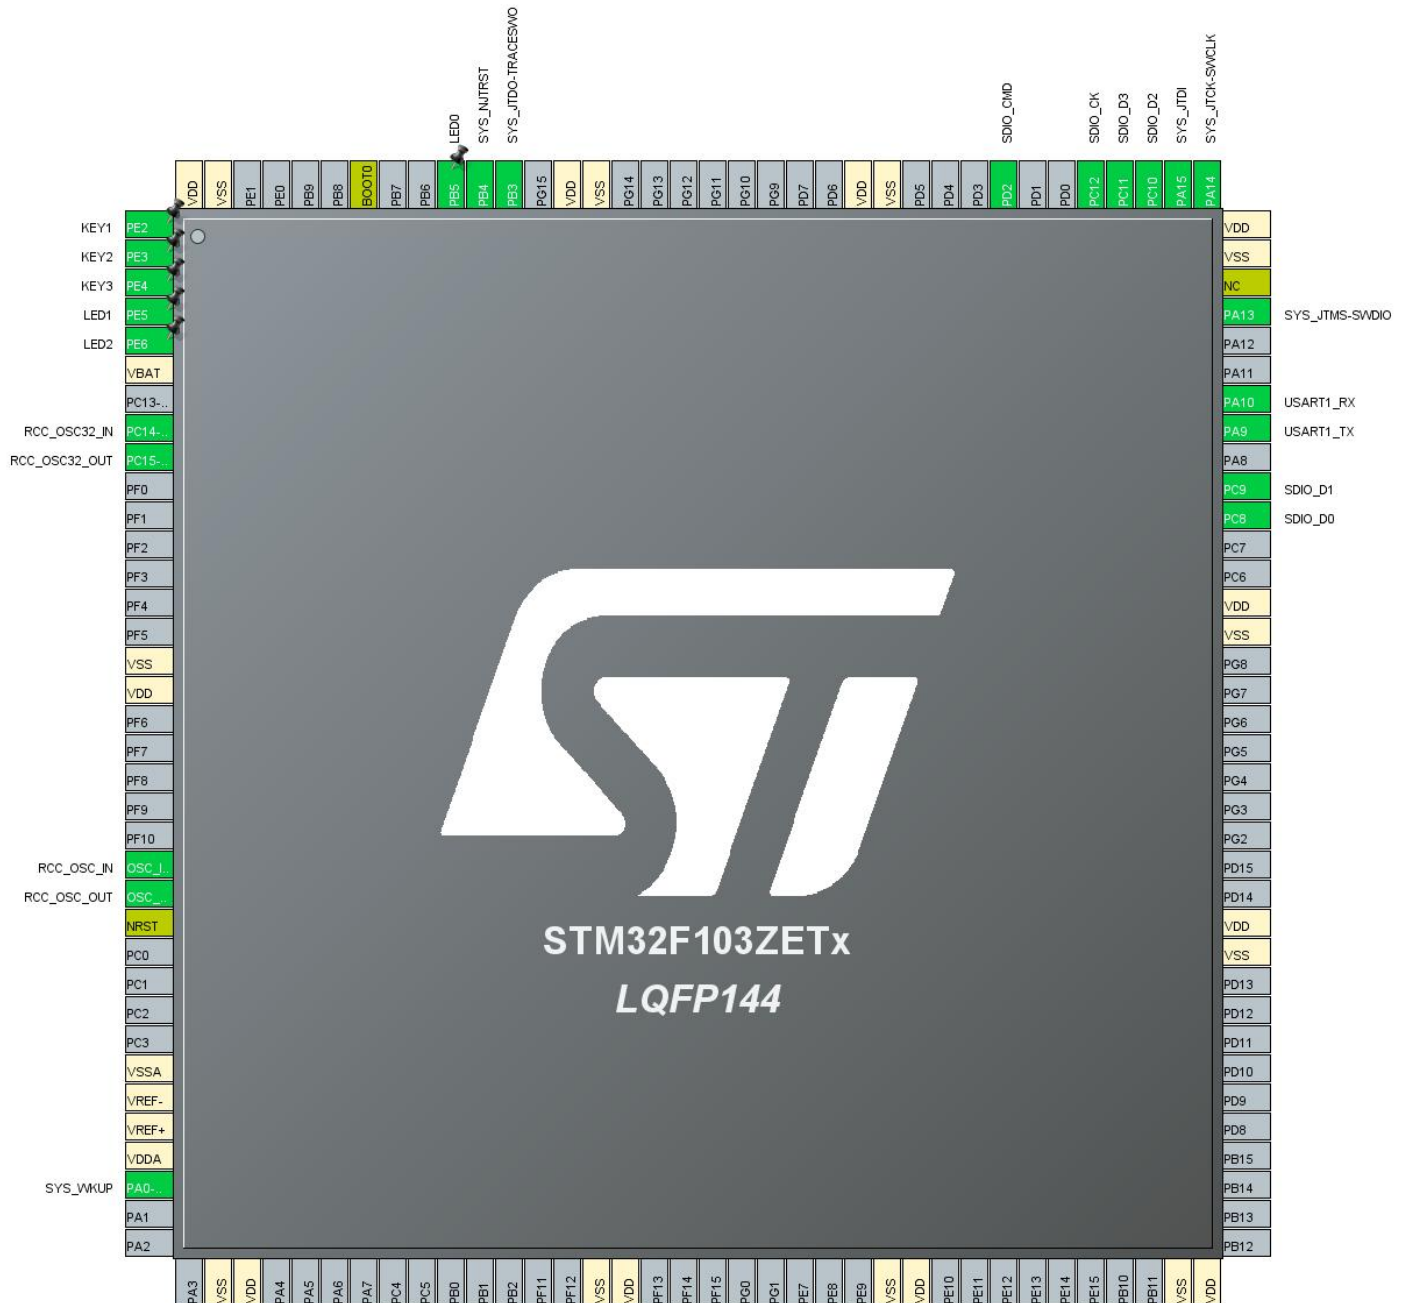


### 3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PE2 *	I/O	GPIO_Input	KEY1
2	PE3 *	I/O	GPIO_Input	KEY2
3	PE4 *	I/O	GPIO_Input	KEY3
4	PE5 *	I/O	GPIO_Output	LED1
5	PE6 *	I/O	GPIO_Output	LED2
6	VBAT	Power		
8	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
9	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
16	VSS	Power		
17	VDD	Power		
23	OSC_IN	I/O	RCC_OSC_IN	
24	OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
30	VSSA	Power		
31	VREF-	Power		
32	VREF+	Power		
33	VDDA	Power		
34	PA0-WKUP	I/O	SYS_WKUP	
38	VSS	Power		
39	VDD	Power		
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		
62	VDD	Power		
71	VSS	Power		
72	VDD	Power		
83	VSS	Power		
84	VDD	Power		
94	VSS	Power		
95	VDD	Power		
98	PC8	I/O	SDIO_D0	
99	PC9	I/O	SDIO_D1	
101	PA9	I/O	USART1_TX	
102	PA10	I/O	USART1_RX	
105	PA13	I/O	SYS_JTMS-SWDIO	
106	NC	NC		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
107	VSS	Power		
108	VDD	Power		
109	PA14	I/O	SYS_JTCK-SWCLK	
110	PA15	I/O	SYS_JTDI	
111	PC10	I/O	SDIO_D2	
112	PC11	I/O	SDIO_D3	
113	PC12	I/O	SDIO_CK	
116	PD2	I/O	SDIO_CMD	
120	VSS	Power		
121	VDD	Power		
130	VSS	Power		
131	VDD	Power		
133	PB3	I/O	SYS_JTDO-TRACESWO	
134	PB4	I/O	SYS_NJTRST	
135	PB5 *	I/O	GPIO_Output	LED0
138	BOOT0	Boot		
143	VSS	Power		
144	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

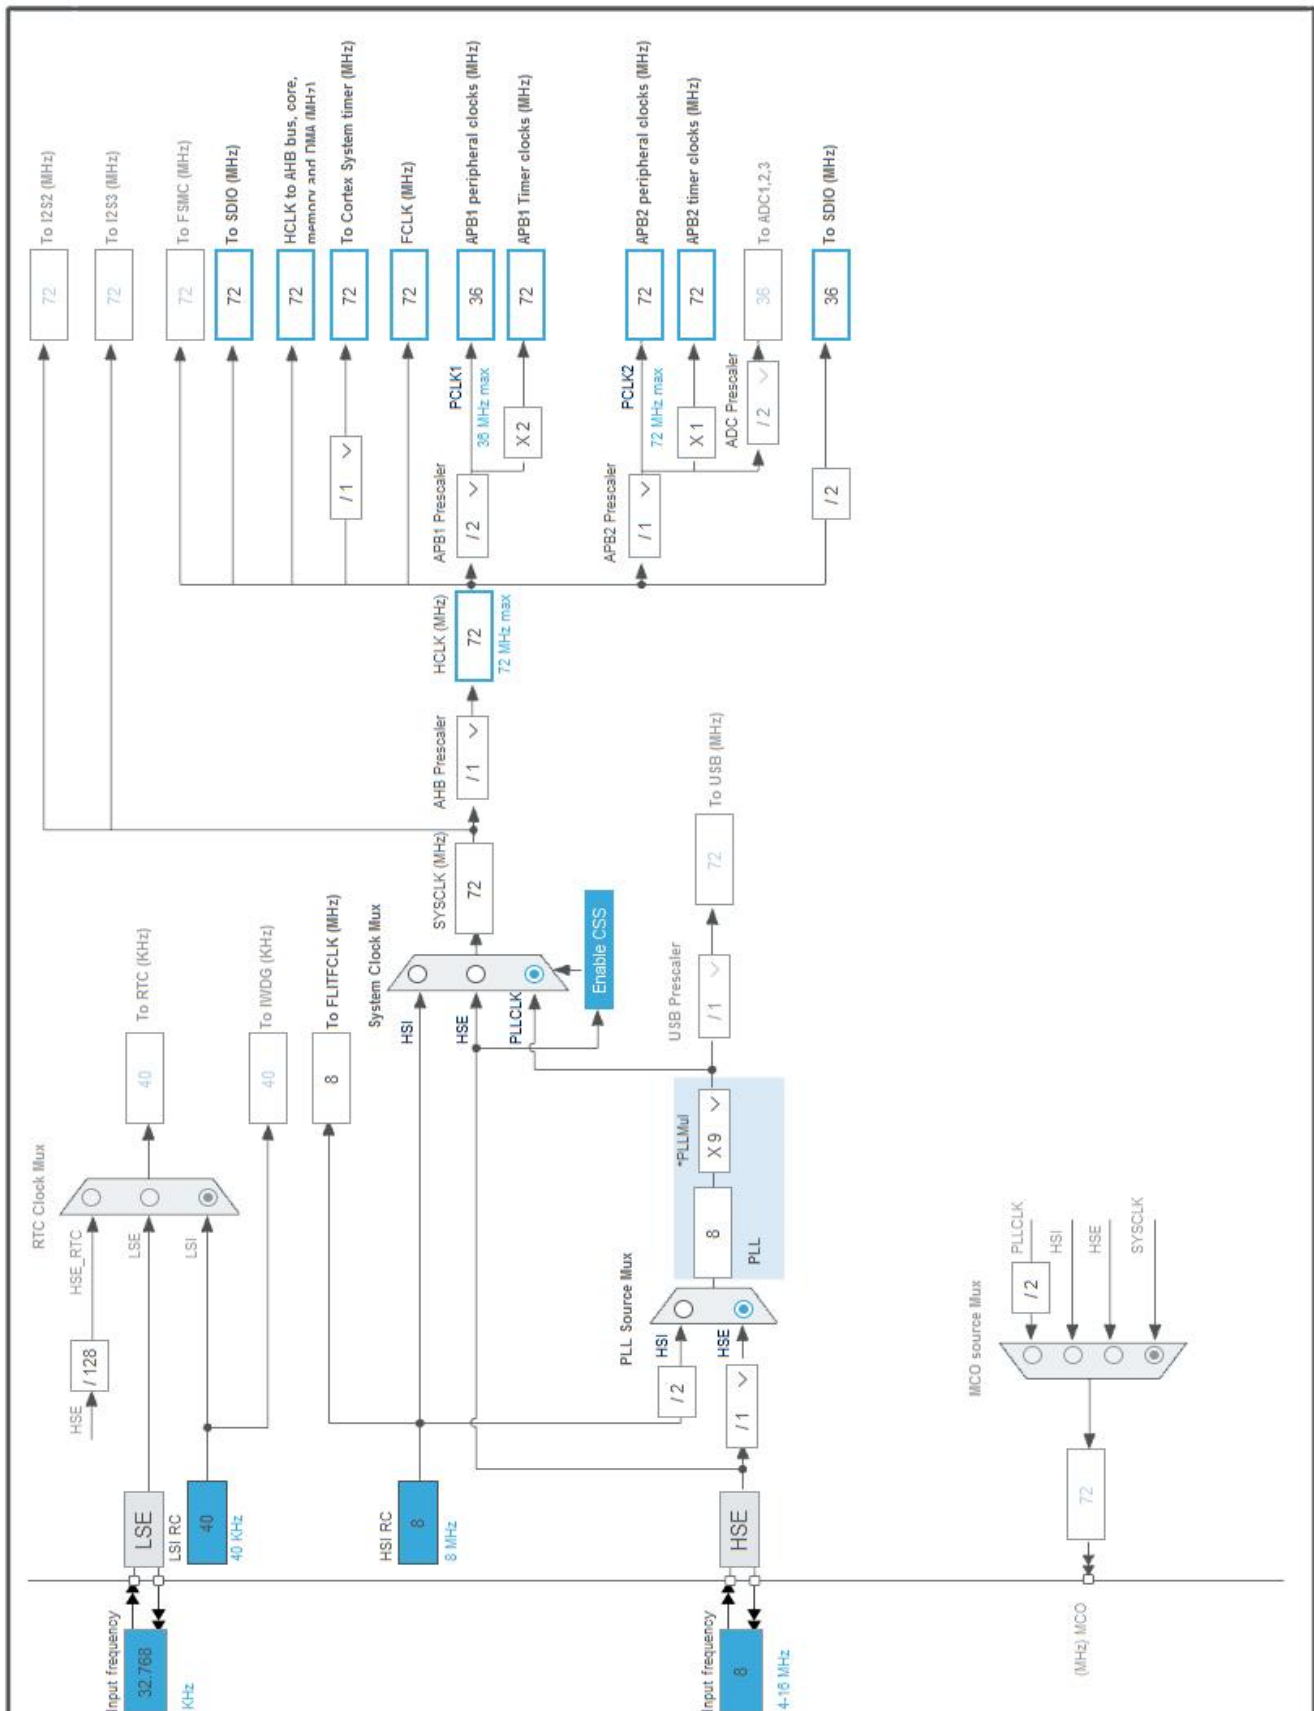

## 5. Software Project

### 5.1. Project Settings

Name	Value
Project Name	test
Project Folder	C:\Users\Administrator\Desktop\SD_Card_File_System
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.0

### 5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

## 6. Power Consumption Calculator report

### 6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103ZETx
Datasheet	14611_Rev12

### 6.2. Parameter Selection

Temperature	25
Vdd	3.3

## 7. IPs and Middleware Configuration

### 7.1. RCC

**High Speed Clock (HSE): Crystal/Ceramic Resonator**

**Low Speed Clock (LSE) : Crystal/Ceramic Resonator**

#### 7.1.1. Parameter Settings:

##### System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

##### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

### 7.2. SDIO

**Mode: SD 4 bits Wide bus**

#### 7.2.1. Parameter Settings:

##### SDIO parameters:

Clock transition on which the bit capture is made	Rising transition
SDIO Clock divider bypass	Disable
SDIO Clock output enable when the bus is idle	Disable the power save for the clock
SDIO hardware flow control	The hardware control flow is disabled
SDIOCLK clock divide factor	<b>5 *</b>

### 7.3. SYS

**Debug: JTAG (5 pins)**

**mode: System Wake-Up**

**Timebase Source: SysTick**

### 7.4. USART1

**Mode: Asynchronous**



### 7.4.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

## 7.5. FATFS

### mode: SD Card

#### 7.5.1. Set Defines:

#### Version:

FATFS version	R0.11
---------------	-------

#### Function Parameters:

FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

#### Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	<b>Simplified Chinese GBK (DBCS, OEM, Windows) *</b>
USE_LFN (Use Long Filename)	<b>Enabled with dynamic working buffer on the STACK *</b>
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

#### Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled

FS\_NOFSINFO (Force full FAT scan) 0

**System Parameters:**

FS_TINY (Tiny mode)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp
NORTC_YEAR (Year for timestamp)	2015
NORTC_MON (Month for timestamp)	6
NORTC_MDAY (Day for timestamp)	4
WORD_ACCESS (Platform dependent access option)	Byte access
FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000
SYNC_t (O/S sync object)	osSemaphoreId
FS_LOCK (Number of files opened simultaneously)	2

**7.5.2. Advanced Settings:**

**SDIO/SDMMC:**

SDIO instance	SDIO
---------------	------

\* User modified value

## 8. System Configuration

### 8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SDIO	PC8	SDIO_D0	Alternate Function Push Pull	n/a	High	
	PC9	SDIO_D1	Alternate Function Push Pull	n/a	High	
	PC10	SDIO_D2	Alternate Function Push Pull	n/a	High	
	PC11	SDIO_D3	Alternate Function Push Pull	n/a	High	
	PC12	SDIO_CK	Alternate Function Push Pull	n/a	High	
	PD2	SDIO_CMD	Alternate Function Push Pull	n/a	High	
SYS	PA0-WKUP	SYS_WKUP	n/a	n/a	n/a	
	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
	PA15	SYS_JTDI	n/a	n/a	n/a	
	PB3	SYS_JTDO-TRACESWO	n/a	n/a	n/a	
	PB4	SYS_NJTRST	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	
GPIO	PE2	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	KEY1
	PE3	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	KEY2
	PE4	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	KEY3
	PE5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED1
	PE6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED2
	PB5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED0

### 8.2. DMA configuration

nothing configured in DMA service

### 8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USART1 global interrupt	true	2	0
SDIO global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		

\* User modified value

## ***9. Software Pack Report***