Pin Header Right Angled 2,54 mm Series 088

Variant 088-1

Single row pinheader





© MPE-GARRY


Technical data

Pitch (mm)	**2,54**
Pincount	**1, 2, 3, 4 ... 50**
Gender	**Male**
Polarising	**no**
Locking	**No**
Material contact	**Copper alloy**
Plating contact	**Au, Selective Au, Sn**
Material insulator	**High temp. thermoplast UL94V-0**
Rated current IEC	**3,0 A**
Rated voltage	**250 V RMS / V DC**
Withstand voltage	**500 V RMS for 1 Minute**
Operating temperature	**-40°C to +105°C**
Max. processing temper.	**260°C for 10 seconds**
Board termination	**Through hole**
Orientation to PCB	**Parallel**
No of rows	**1**
Packaging	**Standard**
A	**10,00, 10,80, 13,80, 15,90 ... 8,70**


A	B	C	W
7,40	**3,50**	3,30	3,90
8,70	**4,80**	3,30	3,90
10,00	**6,10**	3,30	3,90
10,80	**6,90**	3,30	3,90
13,80	**9,90**	3,30	3,90
15,90	**12,00**	3,30	3,90
17,70	**13,80**	3,30	3,90
18,90	**15,00**	3,30	3,90
21,00	**17,10**	3,30	3,90





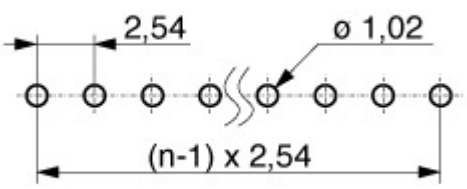


Ordering number configuration

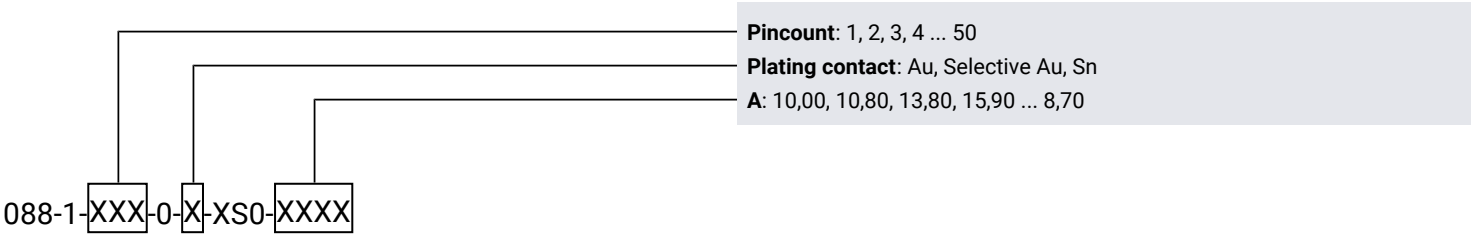

Configure your product online -> https://www.mpe-connector.de/en/products/pin-headers/pin-header-right-angled-254-mm/088-1

Variant 088-2

Double row pinheader

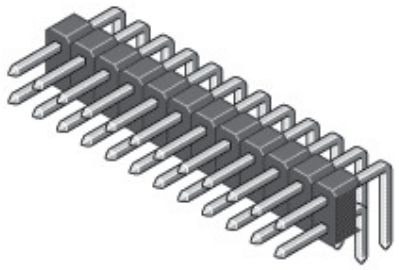



© MPE-GARRY


Technical data

Pitch (mm)	**2,54**
Pincount	**2, 4, 6, 8 ... 100**
Gender	**Male**
Polarising	**no**
Locking	**No**
Material contact	**Copper alloy**
Plating contact	**Au, Selective Au, Sn**
Material insulator	**High temp. thermoplast UL94V-0**
Rated current IEC	**3,0 A**
Rated voltage	**250 V RMS / V DC**
Withstand voltage	**500 V RMS for 1 Minute**
Operating temperature	**-40°C to +105°C**
Max. processing temper.	**260°C for 10 seconds**
Board termination	**Through hole**
Orientation to PCB	**Parallel**
No of rows	**2**
Packaging	**Standard**
A	**10,00, 10,80, 13,80, 15,90 ... 8,70**


A	B	C	W
7,40	**3,50**	3,30	3,90
8,70	**4,80**	3,30	3,90
10,00	**6,10**	3,30	3,90
10,80	**6,90**	3,30	3,90
13,80	**9,90**	3,30	3,90
15,90	**12,00**	3,30	3,90
17,70	**13,80**	3,30	3,90
18,90	**15,00**	3,30	3,90
21,00	**17,10**	3,30	3,90





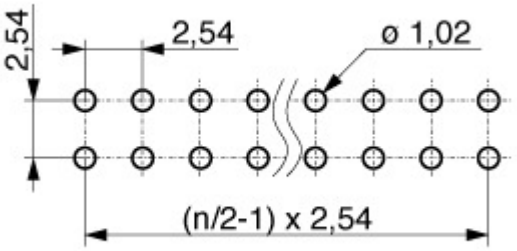


Ordering number configuration

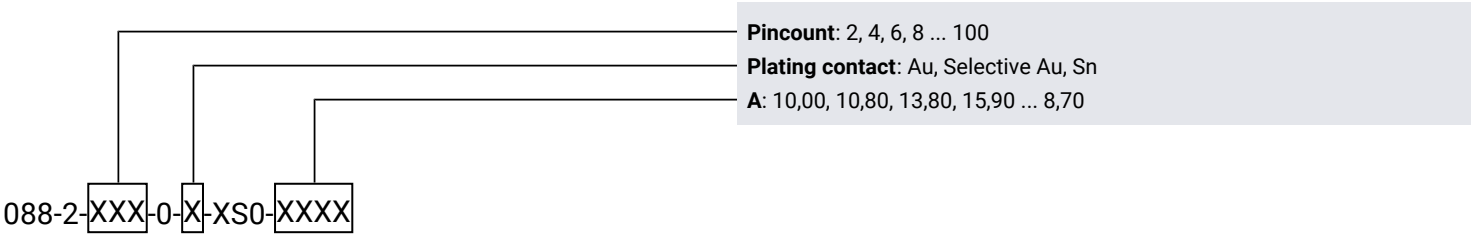

Configure your product online -> https://www.mpe-connector.de/en/products/pin-headers/pin-header-right-angled-254-mm/088-2

Variant 088-3

Tripple row pinheader

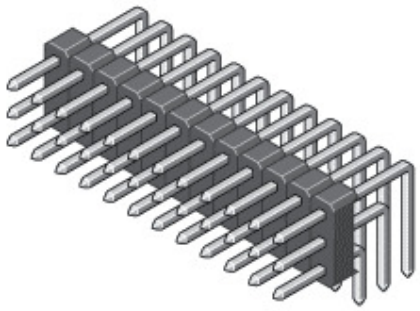



© MPE-GARRY

Technical data


Pitch (mm)	**2,54**
Pincount	**3, 6, 9, 12 ... 120**
Gender	**Male**
Polarising	**no**
Locking	**No**
Material contact	**Copper alloy**
Plating contact	**Au, Selective Au, Sn**
Material insulator	**High temp. thermoplast UL94V-0**
Rated current IEC	**3,0 A**
Rated voltage	**250 V RMS / V DC**
Withstand voltage	**500 V RMS for 1 Minute**
Operating temperature	**-40°C to +105°C**
Max. processing temper.	**260°C for 10 seconds**
Board termination	**Through hole**
Orientation to PCB	**Parallel**
No of rows	**3**
Packaging	**Standard**
A	**10,00, 10,80, 13,80, 15,90 ... 8,70**

A	B	C	W
7,40	**3,50**	3,30	3,90
8,70	**4,80**	3,30	3,90
10,00	**6,10**	3,30	3,90
10,80	**6,90**	3,30	3,90
13,80	**9,90**	3,30	3,90
15,90	**12,00**	3,30	3,90
17,70	**13,80**	3,30	3,90
18,90	**15,00**	3,30	3,90

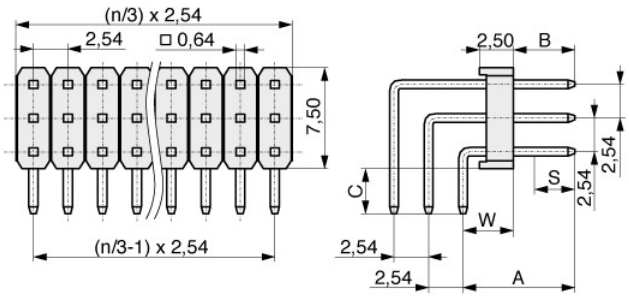

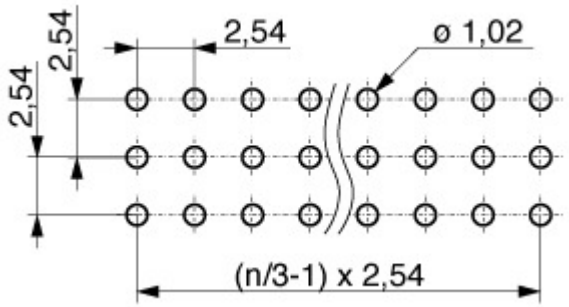

Ordering number configuration

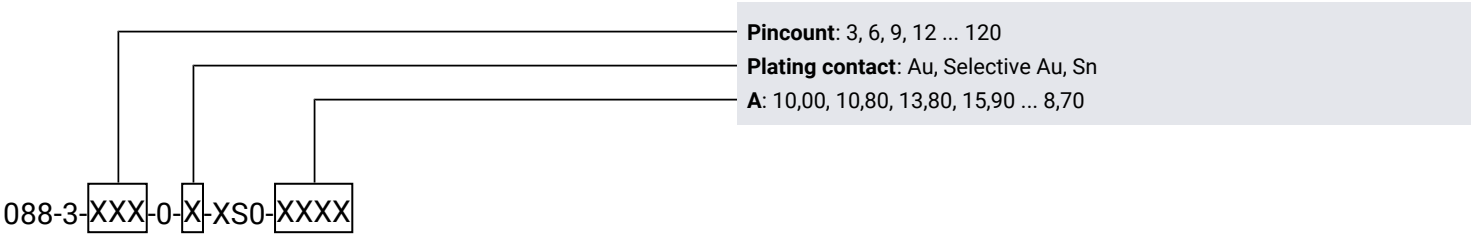

Configure your product online -> https://www.mpe-connector.de/en/products/pin-headers/pin-header-right-angled-254-mm/088-3

binder mpe GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Telefon: +49 (0) 83 62 / 91 56-0
E-Mail: info@mpe-connector.de

Creation date: **18.03.2026**, Internet: https://www.mpe-connector.de/en/products/pin-headers/pin-header-right-angled-254-mm