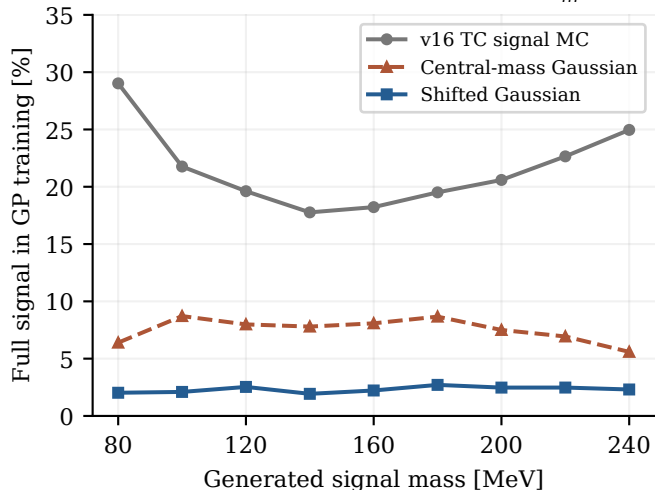
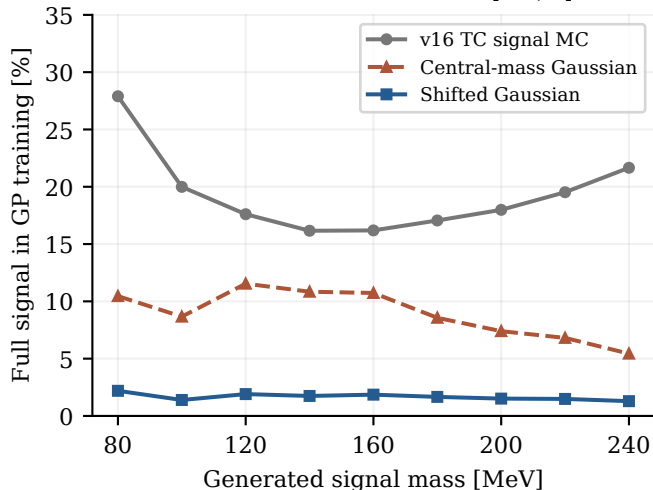


Historical blind window: $\pm 2.25\sigma_m$ Starter blind window: $u \in [-4, 3]$ 

How to read: $u = (m_{\text{rec}} - c) / \sigma_{\text{core}}$. Both Gaussian widths = historical σ_m ; only centers differ. Central-mass center = generated mass M . Shifted center = $M - 3.22433 - 2.21399 \ln(M/150)$, in MeV. Keep each panel's blind/training bins fixed when changing the Gaussian center. Historical window is centered at the shifted Gaussian; starter window uses the predicted MC core (c , σ_{core}). Signals retain full selected normalization. Leakage includes only recorded GP training bins. No uncertainty bars: fixed-template probability integrals, not fits. Existing leakage and fit-impact results already used the shift.